

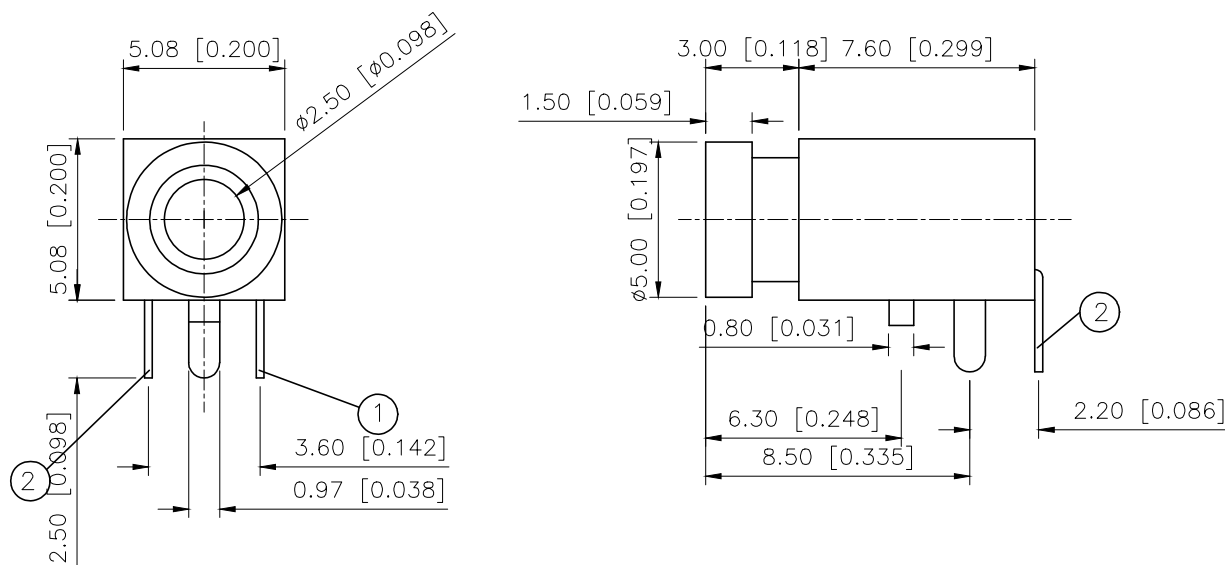


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.25	阿树

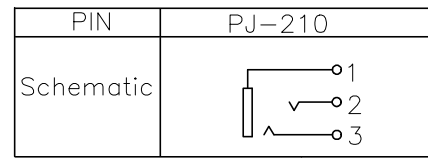

Specifications:
 Voltage rating:30V AC/DC
 Current rating:0.5 A AC/DC
 Withstanding voltage: 500V AC/minute
 Temperature range:-40° ~+55
 Insulation resistance:≥100MΩ

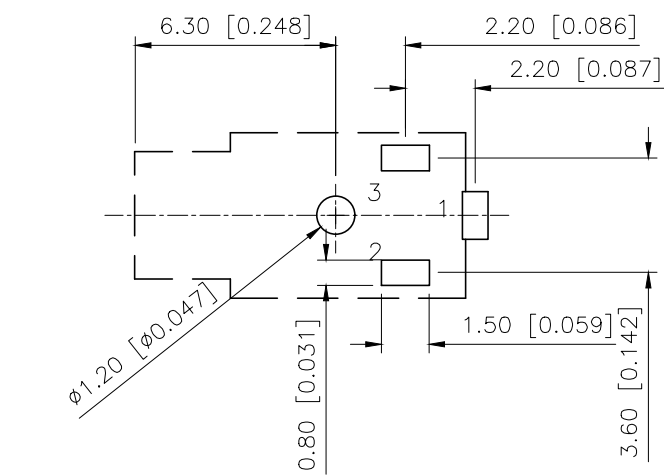

Axle sleeve	Brass	Au
Plastic	PA66	
Terminal 3	Phosphor Bronze	AG
Terminal 2	Phosphor Bronze	AG
Terminal 1	Brass	AG
PAPT NAMF	MATERIAL	PLATING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.5 PHONE JACK
CHECKED		UNIT:	mm/in	PART NO.:	PJ-210
APPROVED		SIZE:	A4	DWG NO.:	