

Ordering Information:




C2501HM-2P - **
1 2

1.Part No.

2.Color:

(blank):Red(Nylon 66 UL94V-2)

WH:White(Nylon 66 UL94V-0)

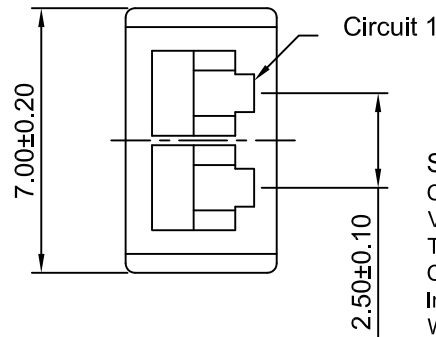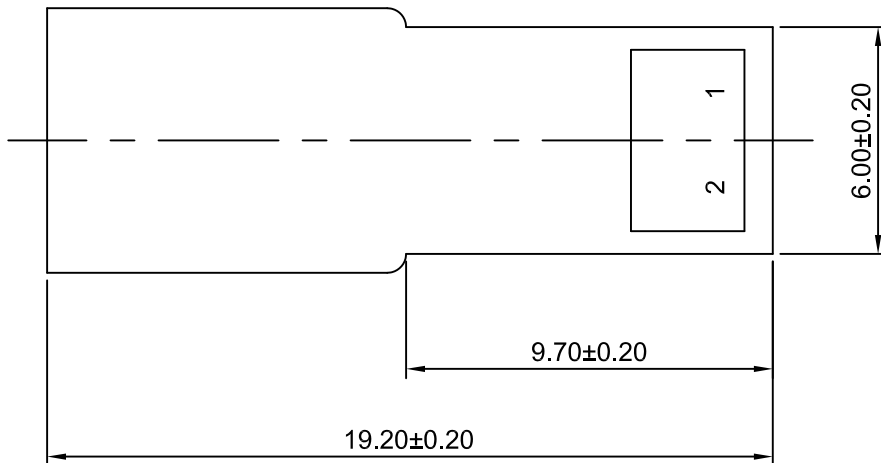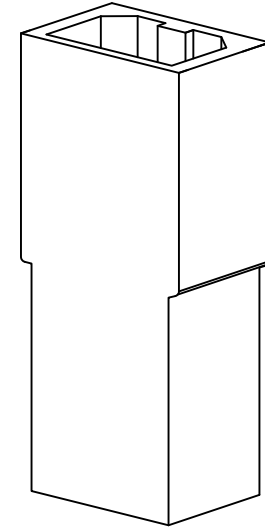

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-2(Red)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1

Draw By:	Approved :
Diankui Wan	Jack Yin

General Tolerance

A1	CHANGE THE SIZE	2020.04.18	x.x±0.25	PROJECT ⊕
A0	NEW RELEASE	2009.05.10	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

Title :		2.50mm PITCH	
		HOUSING	
DRAW NO :		C2501HM-2P	REV A1