


CLD + Shunt Regulator



CL10MD
(future
version:
CL20M35!)

MMTL431A

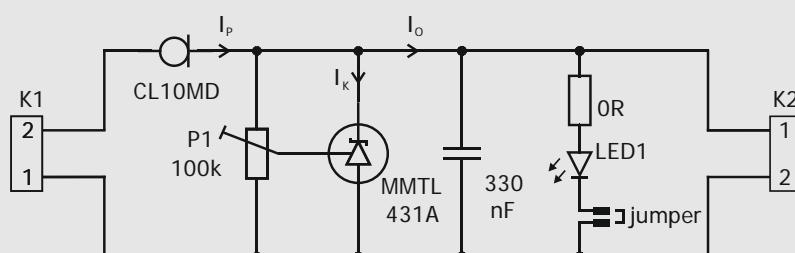

SPICE model available
At diotec.com – search for part number 3990

Target Applications

Battery Powered Tools | Smart Home Devices | Industrial Controls
Electric Mobility | Offline Charger | Home Appliances | Smart Meter

Demo 1

Signal LED driven from
6 to 60 V_{DC}
with just one CLD

Optical Indicators | Display Backlights | Marking Lights | LED Arrays

Demo 2

Precision Voltage Reference
or Low Level Power Supply
working on **2.7 to 60 V_{DC}**
using CLD and Shunt Regulator

Control Circuits | Power Supply for µController | LDO Replacement

Benefits

Low Device Count | Board Space Savings | Wide Input Range
Robust | Reliable | Temperature Stability | Low Costs

Demo 1

Signal LED driven from **6 to 60 V_{dc}**
with just one single CLD
(Wide Input Range / Low Power LED Driver)

CLD stands for Current Limiting Diode, also called Constant Current Regulator. It can be used to drive standard LEDs with typically about 10 to 30 mA of driving current ¹⁾ on variable DC input voltages (Fig. 1a).



Fig. 1a: Block diagram CLD – LED driver

Preparation: Insert **jumper**. Connect an adjustable DC voltage supply to K1

Attention: Connect **positive** input to connector 2, negative to 1

Operation: Vary V_{IN} from ~6V to 60V. The LED lights constantly!

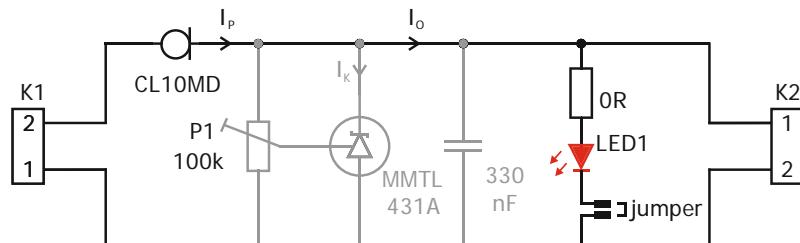


Fig. 1b: Schematic of CLD – LED driver

The here used CL10MD (future version: CL20M35!) has a limiting voltage V_L of 3V and a peak operating voltage V_{AK} of 90V. Assuming a forward voltage of around 3V of the LED, the input voltage applied can vary from about 6V up to 60V, while the LED lights constantly. There is no need for the usual series resistor, the 0 Ω on the board proves it! The limitation to 60V is simply done to keep the junction temperature T_{jmax} to about 125°C. Though T_{jmax} is specified to 150°C for the CL10MD (future version: CL20M35!), it is recommended to keep this parameter as low as possible, in order to keep lifetime high. It is a good practice to keep T_j even below 100°C. Fig. 2 and 3 show different operating points.




Fig. 2a: I_P = 28mA at V_{IN} = 10V_{DC}




Fig. 2b: T_c = 53.4 °C at V_{IN} = 10V_{DC}




Fig. 3a: I_P = 24mA at V_{IN} = 60V_{DC}
(I_P decreases due to its negative temperature coefficient)




Fig. 3b: T_c = 126.5 °C at V_{IN} = 60V_{DC}

¹ Refer to **Application Note** "Cost Effective Driving of Standard LEDs from 10VDC up to 110/230VAC with Current Limiting Diodes - and no flicker!" and **Application Video** "Diotec Products for LED Driver"

Demo 2

Precision Voltage Reference *or*
 Low Level Power Supply for µControllers
 working on **2.7 to 60 V_{DC}**
using CLD and Shunt Regulator

The combination of CLD and Shunt Regulator allows to build a wide range input/low device count solution for providing either a precise, temperature stable voltage reference or even supplying a low power load such as a µController ²⁾. From an unregulated input between 2.7 and 60 V_{DC}, the output voltage can be kept stable over a wide temperature to any voltage in the range of V_{REF} to V_{KAmax} (2.5V to 36V for the MMTL431A/AR), by means of a voltage divider (here trim potentiometer). The CLD provides at 200mV voltage drop already enough current to drive a 1mA load. Above a drop of V_L = 3V, load currents of up to 20 mA can be supplied.

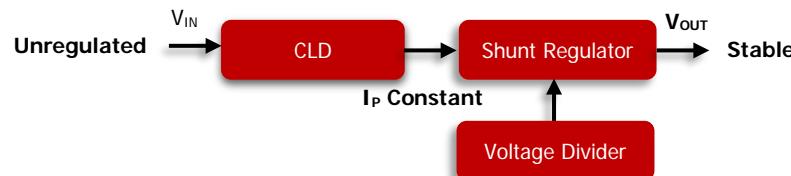


Fig. 4a: Block diagram CLD + Shunt Regulator

Preparation: Remove jumper. Connect an adjustable DC voltage supply to K1

Attention: Connect positive input to connector 2, negative to 1

Operation: Vary V_{IN} from ~2.7V to 60V. Adjust trim-pot to desired V_{OUT} at K2. Measure V_{OUT} with digital multi-meter.

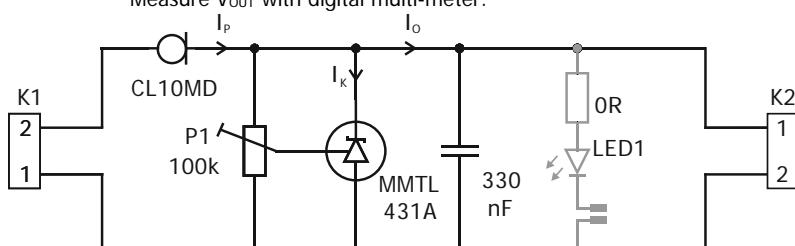


Figure 4b: Schematic of CLD + Shunt Regulator Power Supply/Reference




Fig. 5a: CLD. At I_P = 1mA (start-up), the voltage drop at the CLD is only about 200 mV (1). At 3V drop, already 16 mA are possible (2)




Fig. 5b: Shunt Regulator T_C = 47.6 °C at V_{IN} = 6V_{DC}
 Above: V_{OUT} set to 3.3V




Fig. 5c: Shunt Regulator T_C = 55.4 °C at V_{IN} = 10V_{DC}
 Above: V_{OUT} stable at 3.3V




Fig. 5d: Shunt Regulator T_C = 65.2 °C at V_{IN} = 60V_{DC}
 Above: V_{OUT} still stable at 3.3V



² Refer to **Application Note** "Products for Smart Meter" and **Application Video** "Dedicated Devices for Smart Meter"

Demo 2

Comparison to traditional LDO/Regulator designs

	CL10MD + MMTL431A Design Idea by <i>Diotec</i>	TPS715 Adjustable LDO	TPS7A4001-EP High Voltage Linear Regulator
Input Voltage	2.7V ... 60V ¹⁾	1.2V ... 24V	7V ... 100V
Accuracy of V_{OUT} over full temperature	$\pm 1.4\%$	$\pm 4\%$	$\pm 2.7\%$
ESD capability	$\pm 4 \text{ kV}$	$\pm 2 \text{ kV}$	$\pm 2.5 \text{ kV}$
Stable Operation at	$C_{OUT} < 20 \text{ nF}$	$C_{OUT} > 470 \text{ nF}$	$C_{IN} > 1 \mu\text{F}$ and $C_{OUT} > 4.7 \mu\text{F}$
Cost Comparison	100%	106%	400%

¹⁾) Input voltage limited by thermal considerations as described in Demo 1

Note

- a) The demo board 3990 Version 01 is marked with CL10MD (future version: CL20M35!) but equipped with a CL15MD
- b) At very low output voltages, there might occur a small oscillation. In that case, the output capacitance must be reduced to < 20nF.
This does not affect the function to be demonstrated with the board, but must be considered in real designs.

Disclaimer

This board must be used exclusively by persons which are familiar with the design and test of electronic circuits.

The maximum admissible input voltage is 60 V_{DC}. Input of alternating voltage or wrong polarity leads to immediate board damage.

This demo board contains **design ideas** and shall not be considered as assured and proven solution for any circuit.
No warranty or guarantee, expressed or implied is made regarding the capacity, performance or suitability of any device, circuit etc.
The demo board itself is for design and test purposes only and must not be used in a commercially sold device.

All rights reserved

The information presented in our data sheets and other documents is to the best of our knowledge true and accurate. It describes the type of component or application and shall not be considered as assured characteristics. No warranty or guarantee, expressed or implied is made regarding the capacity, delivery, performance or suitability of any product or circuit etc, neither does it convey any license under the patent rights of others.

Diotec reserves the right to make changes without further notice. However, regular updating of all product information is provided on our website ¹⁾). All Diotec products are sold and shipped subject to our "Standard Terms and Conditions of Business" ²⁾. The reproduction of all documents is prohibited without the expressed written permission of Diotec Semiconductor AG's Managing Board.

Disclaimer

1. All products described or contained are designed and intended for use in standard applications, so called commercial/industrial grade, requiring an ordinary level of reliability.

2. Some products are available with the special grades "AEC-Q101 compliant" respectively "AEC-Q101 qualified". These are automotive standards ³⁾.

3. Customers using these parts in applications requiring a special or specific grade of quality or reliability, such as (but not limited to) life supporting devices or systems, where failure or malfunction of the product may directly affect human life or health, are obliged to validate whether the use in such cases is appropriate.

Diotec does not assume any liability arising out of such applications or uses of its products. Usage in all such cases is on the own and sole risk of the customer.

4. Although Diotec continuously enhances the quality and reliability of its products, customers must incorporate sufficient safety measures in their designs, such as redundancy, fire containment, and anti-failure, so that personal injury, fire or environmental damage can be prevented. Diotec excludes explicitly every implied warranty or liability regarding the fitness of the products to any other than standard applications.

5. All information described or contained herein are subject to change without notice. Please contact Diotec to obtain the latest information before incorporating Diotec products into any design.

6. All information described and contained herein are intended only to enable the buyer to order Diotec's products. The information must not be used for any other purpose.

7. In the event that any product described or contained herein falls under the category of strategic products controlled by the German Federal Office of Economics and Export Control, this product must not be exported without obtaining an export license from the German Federal Ministry for Economic Affairs and Climate Action in accordance with the valid laws.

Alle Rechte vorbehalten

Die Angaben in unseren Datenblättern und sonstigen Dokumenten sind nach bestem Wissen und Gewissen gemacht. Sie dienen jedoch allein der Beschreibung und sind nicht als zugesagte Eigenschaften im Rechts-Sinne zu verstehen. Es wird keine Gewähr bezüglich Liefermöglichkeit, Ausführung oder Einsatzmöglichkeit der Bauelemente übernommen, noch dass die angegebenen Bauelemente, Baugruppen, Schaltungen etc. frei von Schutzrechten sind.

Wir behalten uns Änderungen der aufgeführten Daten ohne vorherige Ankündigung vor. Alle Änderungen werden jedoch regelmäßig auf unserer Internet-Seite veröffentlicht ¹⁾. Verkauf und Lieferung von Diotec-Produkten erfolgt gemäß unseren "Allgemeinen Geschäftsbedingungen" ²⁾. Die Vervielfältigung aller Dokumente ist nur mit schriftlicher Genehmigung des Vorstandes der Diotec Semiconductor AG gestattet.

Haftungsausschluss

1. Alle beschriebenen oder enthaltenen Produkte sind für den Gebrauch in Standardanwendungen mit einem gewöhnlichen Zuverlässigkeitseiveau entworfen und bestimmt, bekannt als kommerziell/industrielle Anwendungen.

2. Einige Produkte sind mit den speziellen Qualifikationen „AEC-Q101 konform“ oder „AEC-Q101 qualifiziert“ erhältlich. Dies sind Automotive-Standards ³⁾.

3. Falls diese Produkte in Anwendungen verwendet werden sollen, die einen besonderen Grad der Qualität oder Zuverlässigkeit erfordern, z. B. (aber nicht begrenzt auf) lebenserhaltende Geräte oder Systeme, bei denen durch Ausfall oder eine Störung des Produktes menschliches Leben oder Gesundheit direkt beeinflusst werden kann, ist der Anwender verpflichtet sicherzustellen, dass der beabsichtigte Gebrauch des vorgesehenen Produktes unbedenklich ist.

Diotec übernimmt keine Haftung die sich aus solchen Anwendungen oder der Verwendung der Produkte ergibt. Der Gebrauch für alle solche Anwendungen erfolgt auf eigenes und ausschließliches Risiko des Anwenders.

4. Obwohl Diotec die Qualität und die Zuverlässigkeit seiner Produkte beständig erhöht, müssen Kunden ausreichende Sicherheitsvorkehrungen in ihren Designs vornehmen – wie Redundanz, Feuereindämmung und Ausfallschutz – damit Personenschäden, Feuer oder Umweltschädigung verhindert werden können. Diotec schließt ausdrücklich jede implizierte Garantie oder Verbindlichkeit aus, welche die Eignung der Produkte zu irgendwelchen anderen als Standardanwendungen betrifft.

5. Alle Informationen, die hier beschrieben oder enthalten sind, können jederzeit ohne jede Benachrichtigung geändert werden. Vor Einsatz eines Diotec Produktes in irgendeiner Anwendung sind bei Diotec die neuesten Informationen einzuholen.

6. Alle Informationen, die hier beschrieben oder enthalten sind, sollen dem Kunden nur ermöglichen, Diotec Produkte zu bestellen. Die Informationen dürfen zu keinem anderen Zweck verwendet werden.

7. Sollte ein hier beschriebenes oder enthaltenes Produkt unter Beschränkungen fallen, die durch das deutsche Bundesamt für Wirtschaft und Ausfuhrkontrolle geregelt werden, darf dieses Produkt in Übereinstimmung mit den gültigen Gesetzen nicht ohne Exportgenehmigung vom deutschen Bundesministerium für Wirtschaft und Klimaschutz exportiert werden.

1 Refer to <http://diotec.com/> "Products/Product Changes" respectively "News/Datasheets"

Siehe <http://diotec.com/> „Produkte/Produktänderungen“ bzw. „News/Datenblätter“

2 Refer data book or <http://diotec.com/> "Company" – Siehe Datenbuch oder <http://diotec.com/> „Unternehmen“

3 Refer to <http://diotec.com/> "Products/Information/Qualification/Commercial Grade and AEC-Q101"

Siehe <http://diotec.com/> „Produkte/Informationen/Qualifizierung/Standard und AEC-Q101“