




Connectors > Contacts > Connector Contacts > DYNAMIC 3000 CONTACT

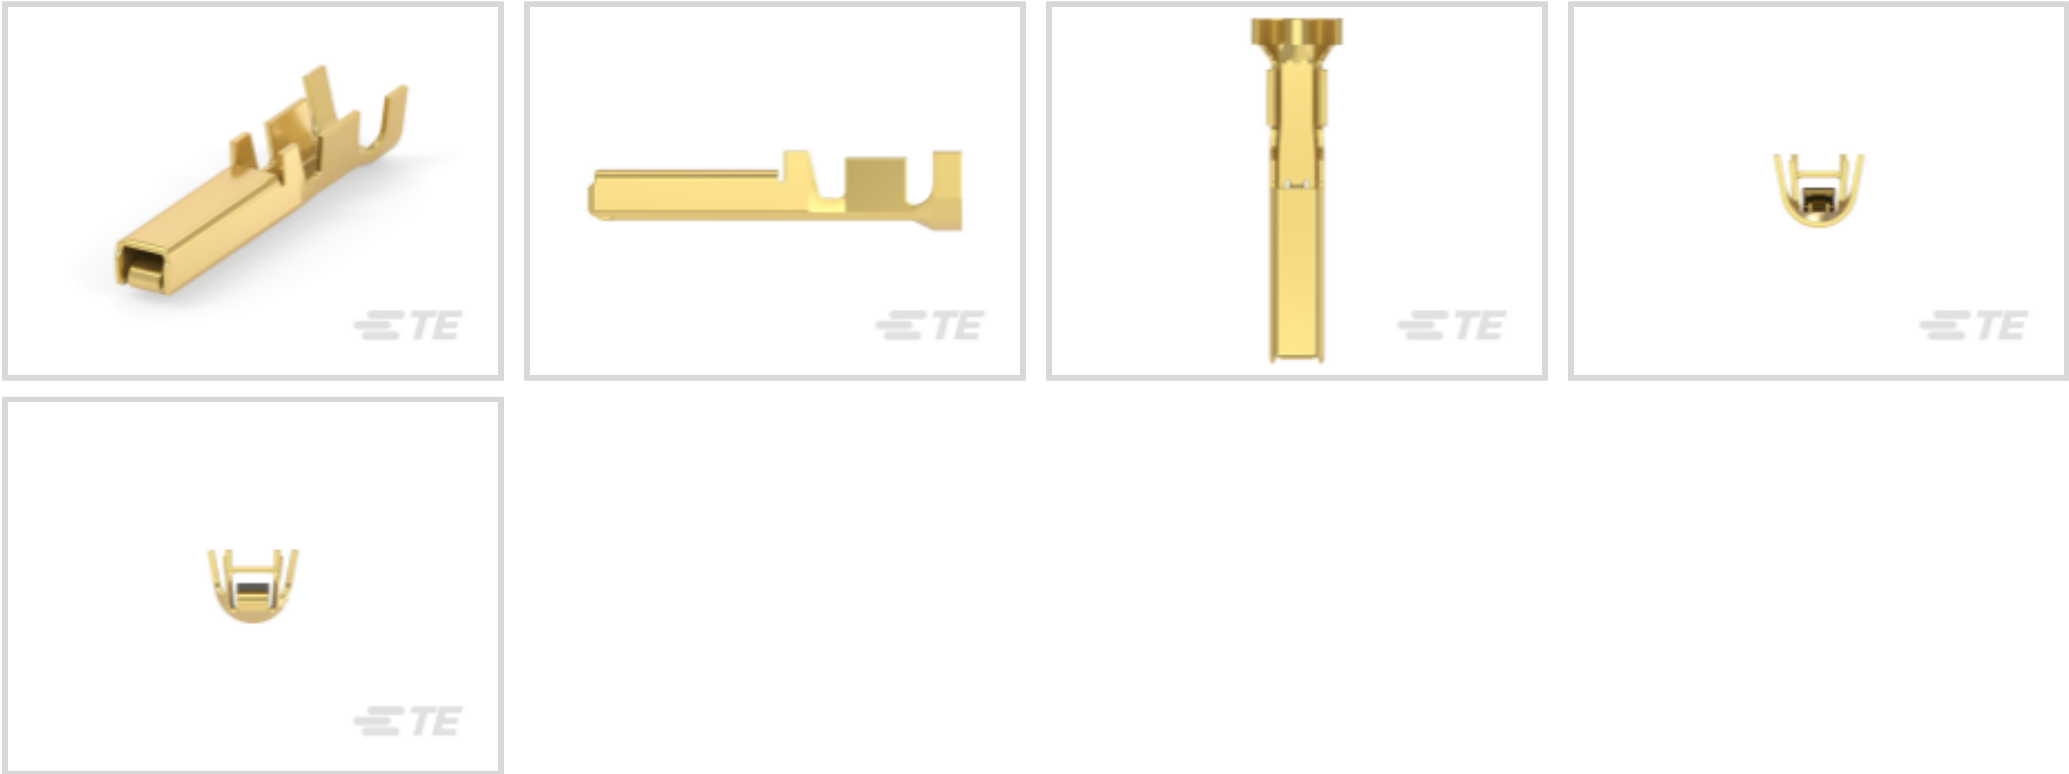

Contact Type: **Receptacle**

Contact Mating Area Plating Material: **Gold**

Operating Voltage: **250 VAC**

Compatible With Wire & Cable Type: **Discrete Wire**

Wire Size: **16 – 14 AWG**

[All DYNAMIC 3000 CONTACT \(91\)](#)

Features

Product Type Features

Discrete Wire Type	Solid or Stranded
Sealable	No

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Contact Features

Mating Tab Width	2 mm[.08 in]
Mating Tab Thickness	.64 mm[.025 in]
Contact Mating Area Plating Material Thickness	.38 µm[15 µin]
Contact Length	18.3 mm[.72 in]
Contact Orientation	Straight



Barrel Type	Open
Contact Type	Receptacle
Contact Mating Area Plating Material	Gold
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	15 A

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Compatible Insulation Diameter Range	3.1 – 3.4 mm[.122 – .133 in]
Wire Size	1.23 – 2.27 mm²

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Packaging Features

Packaging Quantity	5000
Packaging Method	Bag & Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # CAT-D9934-A75B Receptacle and Tab Housing: 5.08 mm Pitch, 250-600V	TE Part # CAT-D9934-A75A DYNAMIC 3100 REC AND TAB HSG	TE Part # CAT-D9934-A75C DYNAMIC 3500 REC AND TAB HSG	TE Part # 91561-1 CCII D-3 3L REC TAB 16-14 ASSY
TE Part # 917249-1 DYNAMIC D-3400F REC HSG 20P	TE Part # 234168-1 EXTRACTION TOOL(DYNAMIC D-3)	TE Part # 178214-1 DYNAMIC 3400 REC HSG 12P	TE Part # 2255149-1 MINI SAHT D3000-3L

Also in the Series | Dynamic 3000 Series

Connector Contacts(94)	Connector Hardware(8)	Insertion & Extraction Tools(2)	PCB Headers & Receptacles(283)

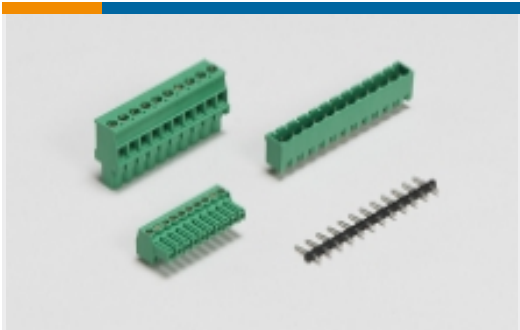

PCB Terminal Blocks(37)



Standard Rectangular Connectors(2)



Wire-to-Board Connector Assemblies & Housings(152)

Customers Also Bought



TE Part #1-179553-2
Receptacle and Tab Housing: 5.08 mm Pitch, 250-600V



TE Part #178289-8
DYNAMIC D3100 REC HSG 20P




TE Part #172624-3
DRAWER CONN. MALE 24P 4.3MM



TE Part #175217-2
DYNAMIC REC CONTACT M L/P



TE Part #1827587-2
DYNAMIC D1000 REC CONT M AU 0.38um L/P

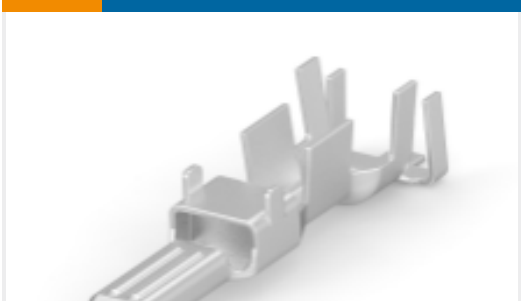

TE Part #4-1971782-2
PTL TAB CONTACT LP, 14 AWG

Documents

Product Drawings

DYNAMIC D-3 REC CONT. 3L AU 0.38 L/P

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_353717-2_B.3d_igs.zip

English

Customer View Model

ENG_CVM_353717-2_B.3d_stp.zip

English

Customer View Model

ENG_CVM_353717-2_B.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

English

Instruction Sheet (non U.S.)

Japanese

Instruction Sheet (non U.S.)

Japanese

MULTIPLE ENCLOSURE 67M D1200 15POS. REC PLUG

Japanese

Agency Approvals

TUV Certificate

English

TUV Certificate

English