






- Notes 1 Lead CO-PLANARITY shall be 0.1mm.
2 For modification, etc., preventive hole for sink mark may be added according to circumstances.
3 The dimensions in parentheses are for reference.

				2		PHOSPHOR BRONZE		Contact area : Gold 0.1μm min.			
								Mounting area : Gold plating flash			
								Under plating : Nickel 0.5μm min.			
1	POLYPHENYLENE SULFIDE		Light brown UL94V-0								
NO.	MATERIAL		FINISH . REMARKS			NO.	MATERIAL		FINISH . REMARKS		
UNITS mm				SCALE 5 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00006410		DESIGNED KS. NAKAJIMA	CHECKED HT. YAMAGUCHI	DATE 20200803
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		20050705		DRAWING NO. EDC-150564-71-25					
		CHECKED : HS. OZAWA		20050705		PART NO. FX8-60P-SV(71)					
		DESIGNED : TH. NODA		20050622		CODE NO. CL578-0001-6-71					
		DRAWN : TH. NODA		20050622		 					

△₁ Added precaution



Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

【Precaution】

When a board with multiple connectors mounted is mated, the connector may be damaged or deformed.
Please divide one side of the board so only one connector is mated per board.

OK

NG

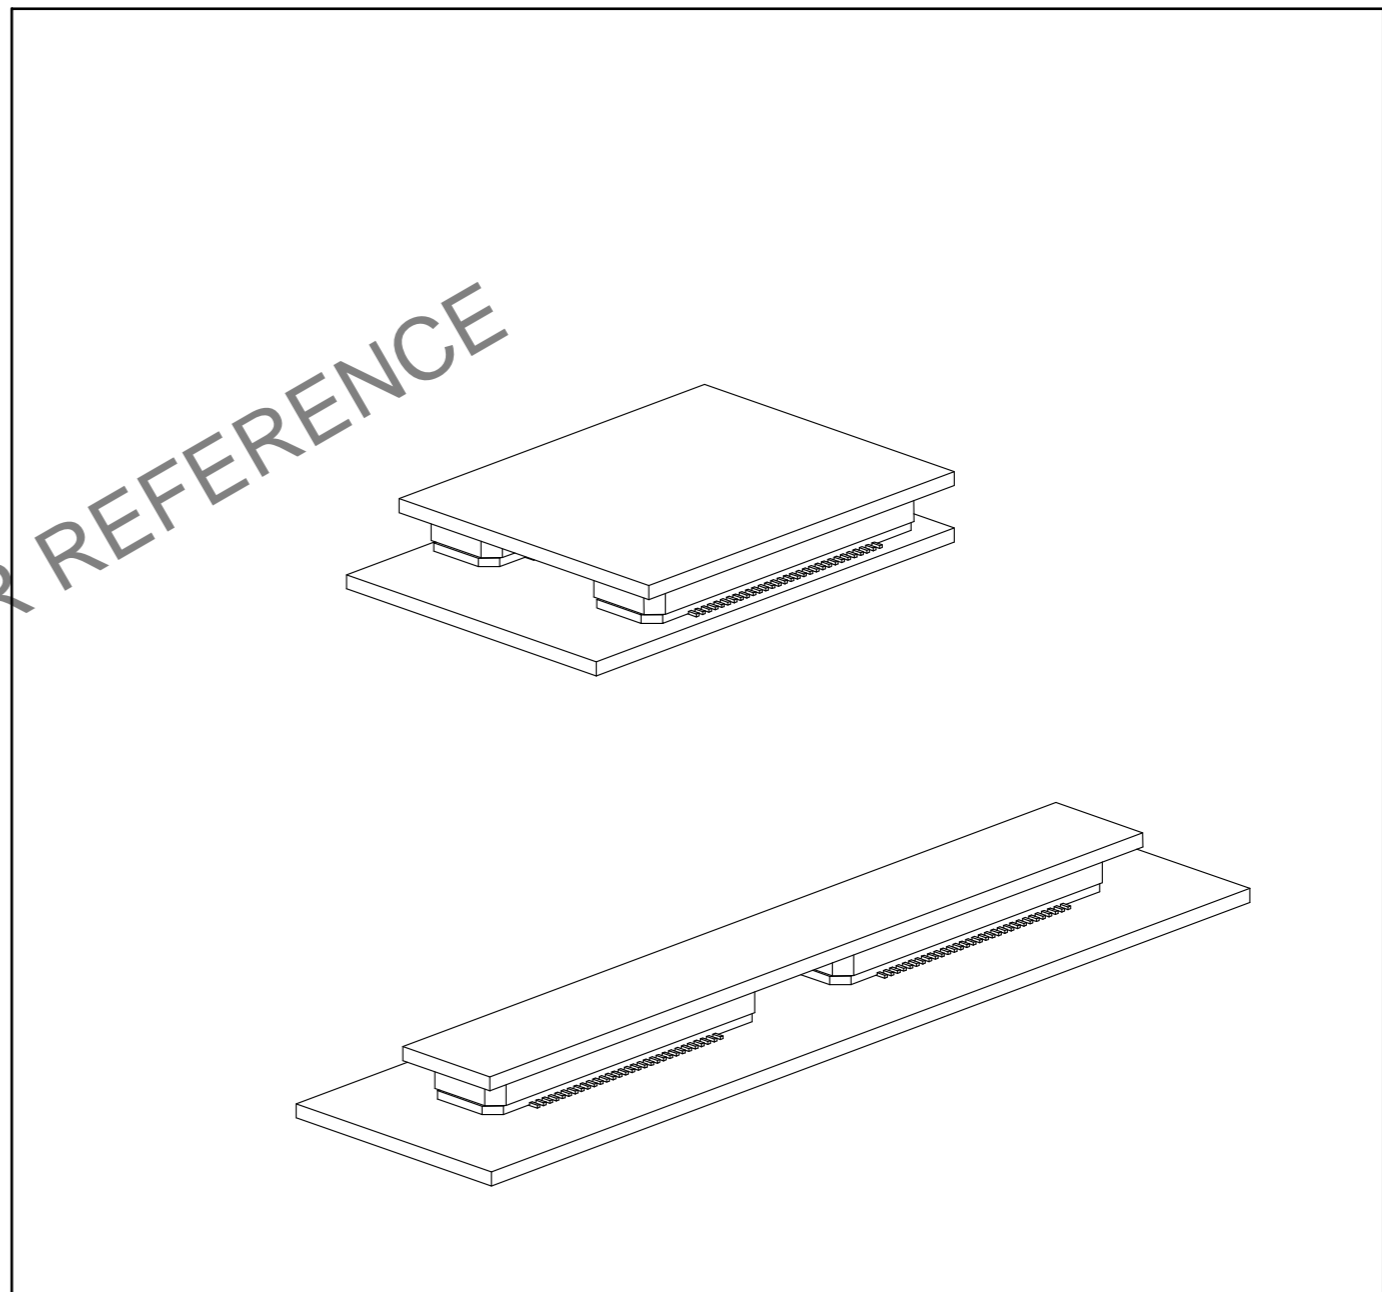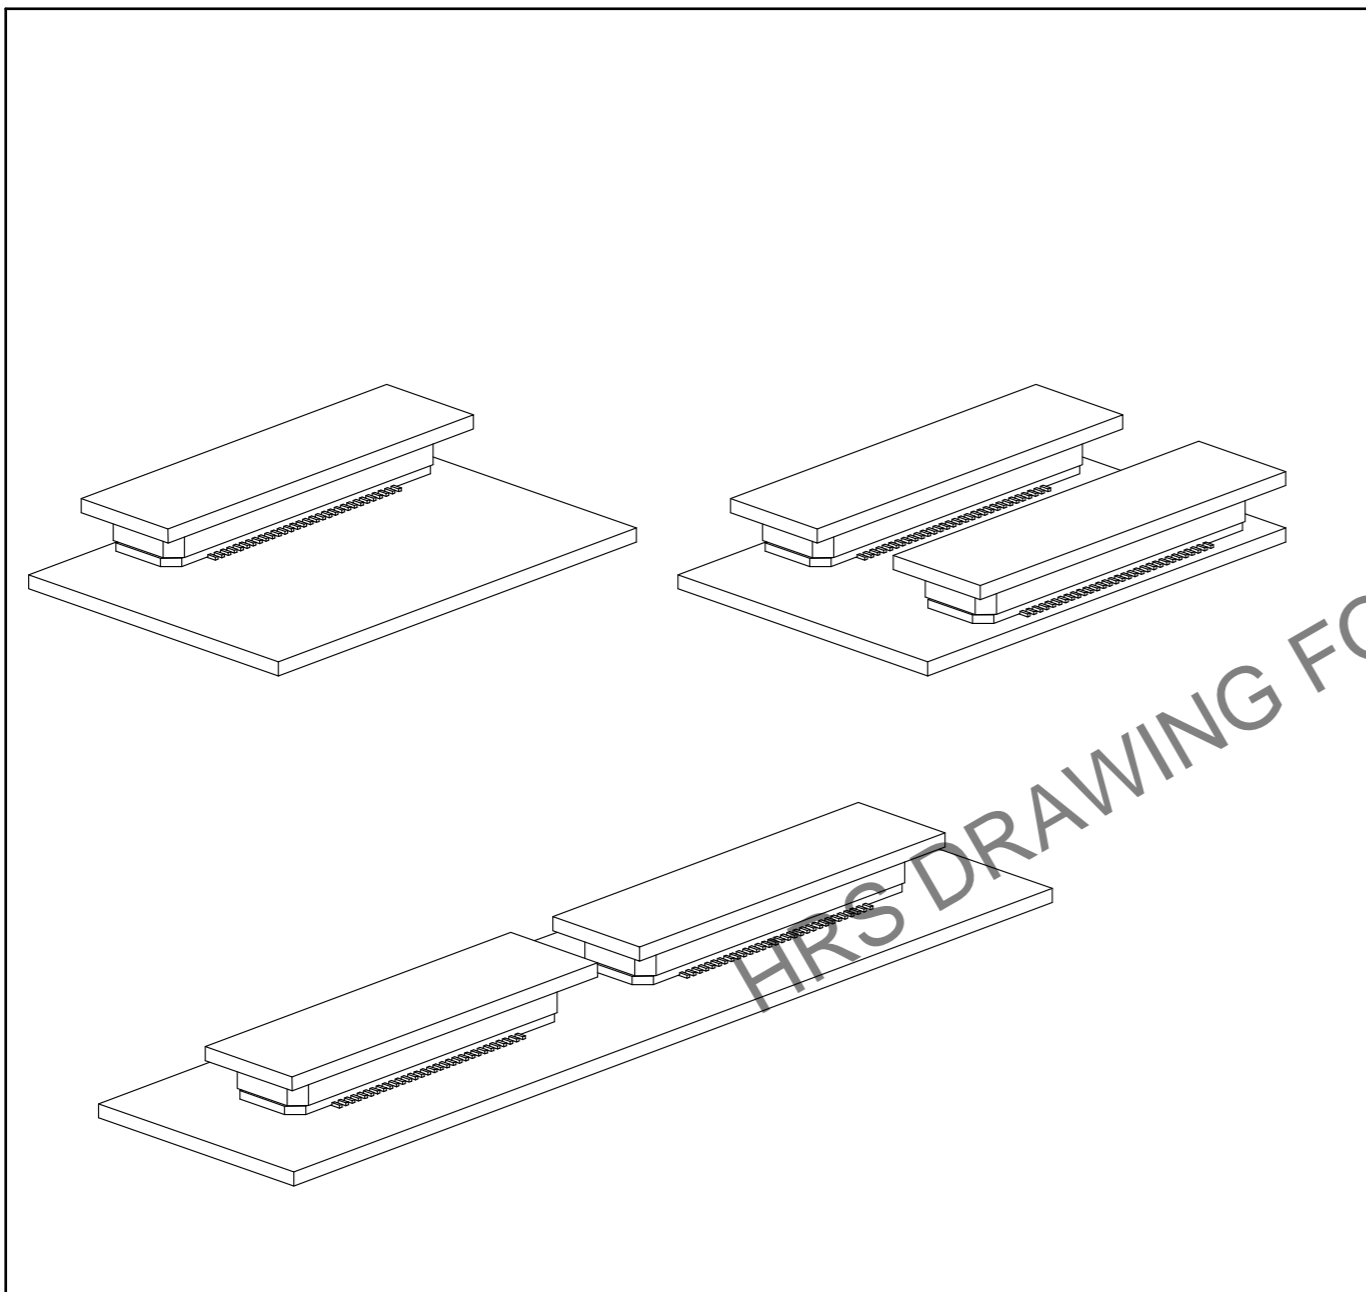

DRAWING NO.	EDC-150564-71-25
PART NO.	FX8-60P-SV(71)
CODE NO.	CL578-0001-6-71