PHŒNIX CONTACT

Flush-type connector - SACC-E-MS-4CON-M16/0,5 0,14SCO - 1403190

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

Sensor/actuator flush-type plug, 4-pos., M12 SPEEDCON, A-coded, front/screw mounting with M16 thread, with 0.5 m TPE litz wire, 4 x 0.14 mm²

RoHS

SPEEDCON LOCKING

Key Commercial Data

Packing unit	1 pc
Minimum order quantity	50 pc
GTIN	4 046356 642811
GTIN	4046356642811

Technical data

Environmental Product Compliance

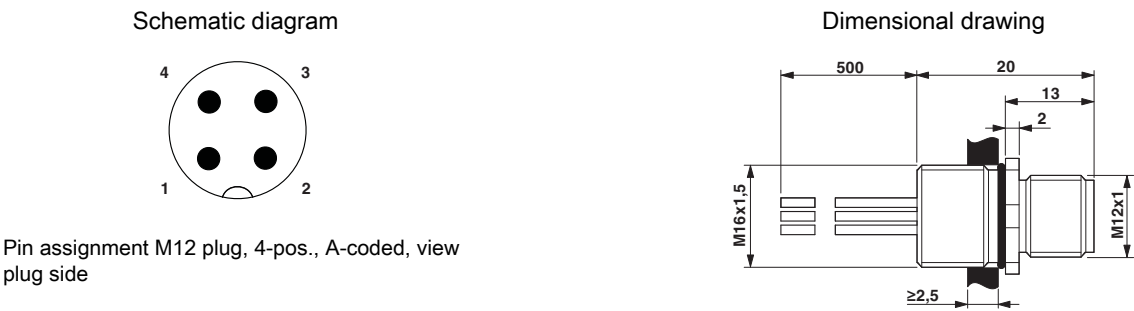| REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Dimensional drawing

45°

Ø17 $^{+0,2}$

M16x1,5

Housing cutout for M16 fastening thread, mounting panel with thread
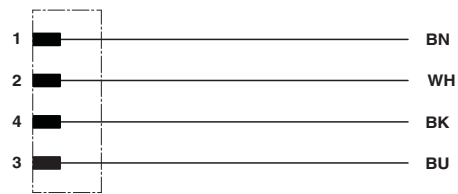
Dimensional drawing

≤4,5

Ø16,1

13,5 $^{+0,1}$

Housing cutout for M16 fastening thread, mounting panel with feed-through hole (alternatively with surface as protection against rotation)

PHŒNIX CONTACT

Flush-type connector - SACC-E-MS-4CON-M16/0,5 0,14SCO - 1403190

Schematic diagram

4   3
1   2

Pin assignment M12 plug, 4-pos., A-coded, view
plug side

Dimensional drawing

500   20
13
2
M16x1,5
M12x1
≥2,5

M12 flush-type plug

Circuit diagram

1		BN
2		WH
4		BK
3		BU

Contact assignment of the M12 plug and the M12 socket

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

| EAC | EAC | B.00767 |

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
http://www.phoenixcontact.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact](#):
  [1403190](#)