

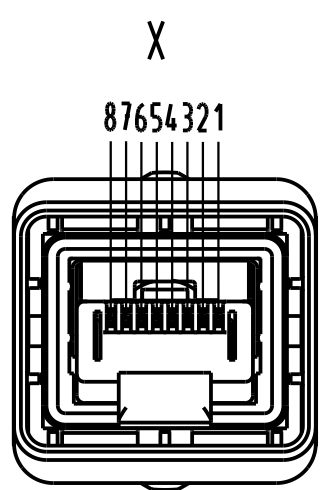


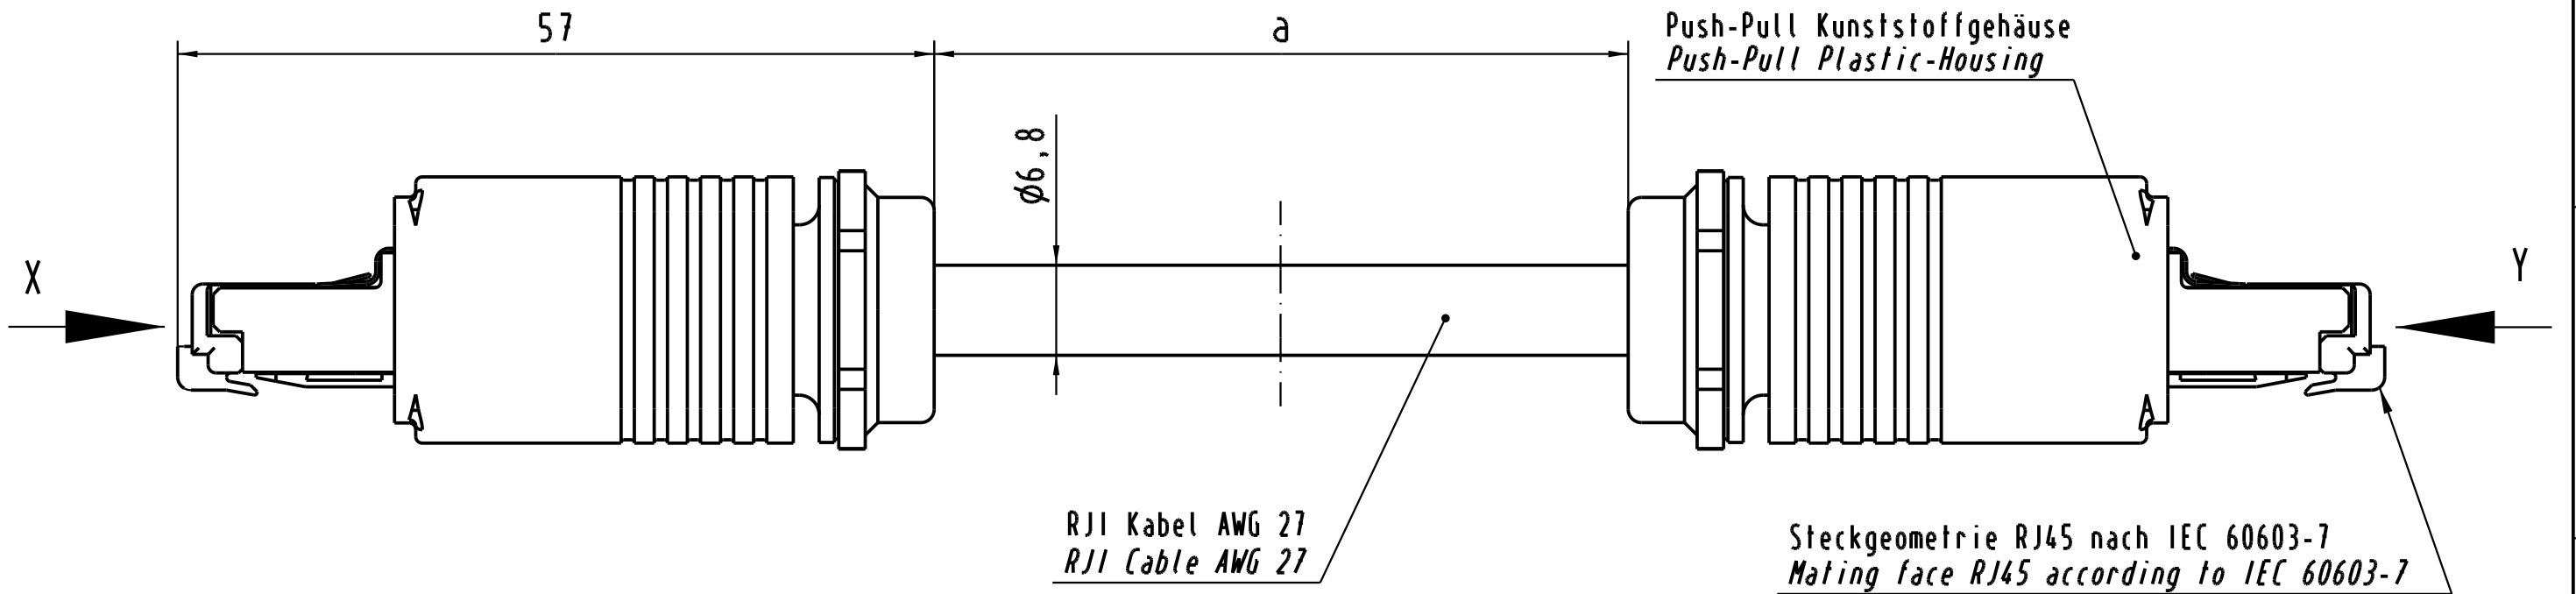


Belegungsplan
Loading-Plan
acc. EIA TIA 568A
Schirm Shield

1	Weiß(grün)	White(green)	1
2	grün	Green	2
3	Weiß(orange)	White(orange)	3
4	Blau	Blue	4
5	Weiß(blau)	White(blue)	5
6	Orange	Orange	6
7	Weiß(braun)	White(brown)	7
8	Braun	Brown	8

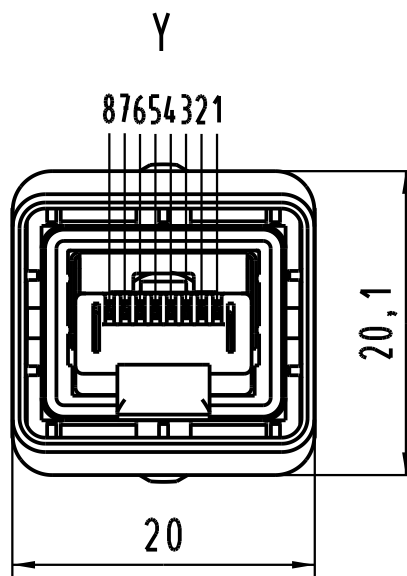

- Übertragungseigenschaften nach ISO/IEC 11801:2002: Class E.
- Schutzart: IP67/65
- Temperaturbereich: -40°C ...+70°C

- Transmission properties in accordance with ISO/IEC 11801:2002: Class E.
- Protection level: IP67/65
- Temperature range: -40°C ...+70°C

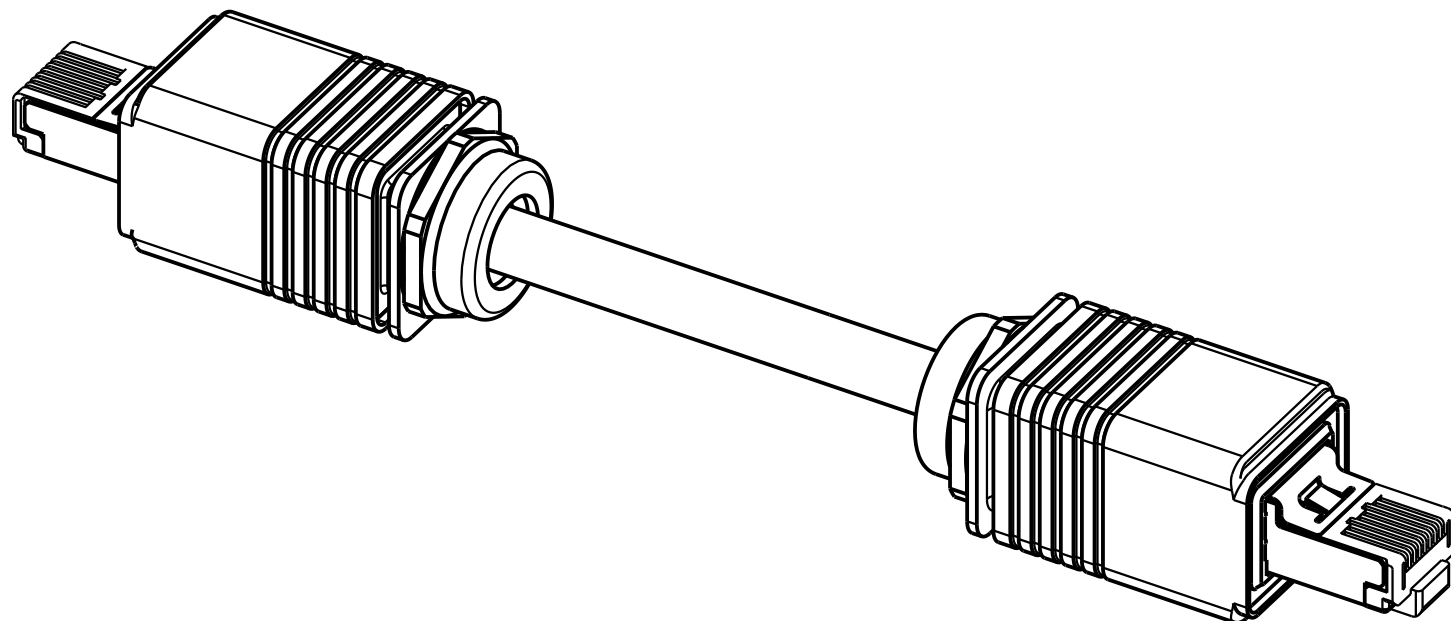

8xAWG 27/7 flexibel/stranded	09 45 745 1553	20 m
8xAWG 27/7 flexibel/stranded	09 45 745 1551	10 m
8xAWG 27/7 flexibel/stranded	09 45 745 1527	5 m
8xAWG 27/7 flexibel/stranded	09 45 745 1525	3 m
8xAWG 27/7 flexibel/stranded	09 45 745 1523	1,5 m
massiv / flexibel solid / stranded	Bestell-Nr. Part-No.	Maß a Dim. a

All Dimensions in mm Original Size DIN A 3			Techn. Character.			Nicht tolerierte Maß/Free size Tolerances	
				Dat.	Name	Maßstab/Scale 2:1	RJ45 Kabel 8xAWG 27/7, Class E, flexibel, RJ45 cable 8xAWG 27/7, Class E, stranded, 4x2x0,09 2xRJ45, IP67 Push Pull
			Detail.	25.06.04	Wie		
			Insp.	25.06.04	Wae		
			Stand.				
32405	10.11.04	Wie				HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP	TB 09 45 745 1523
32192	16.08.04	Wie					
32073							
Mod.	Dat.	Name					Blatt/ page
							Sub.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[09457451525](#) [09457451551](#) [09457451553](#) [09457451532](#) [09457451523](#) [09457451527](#)