




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.8	阿树

A

B

C

D

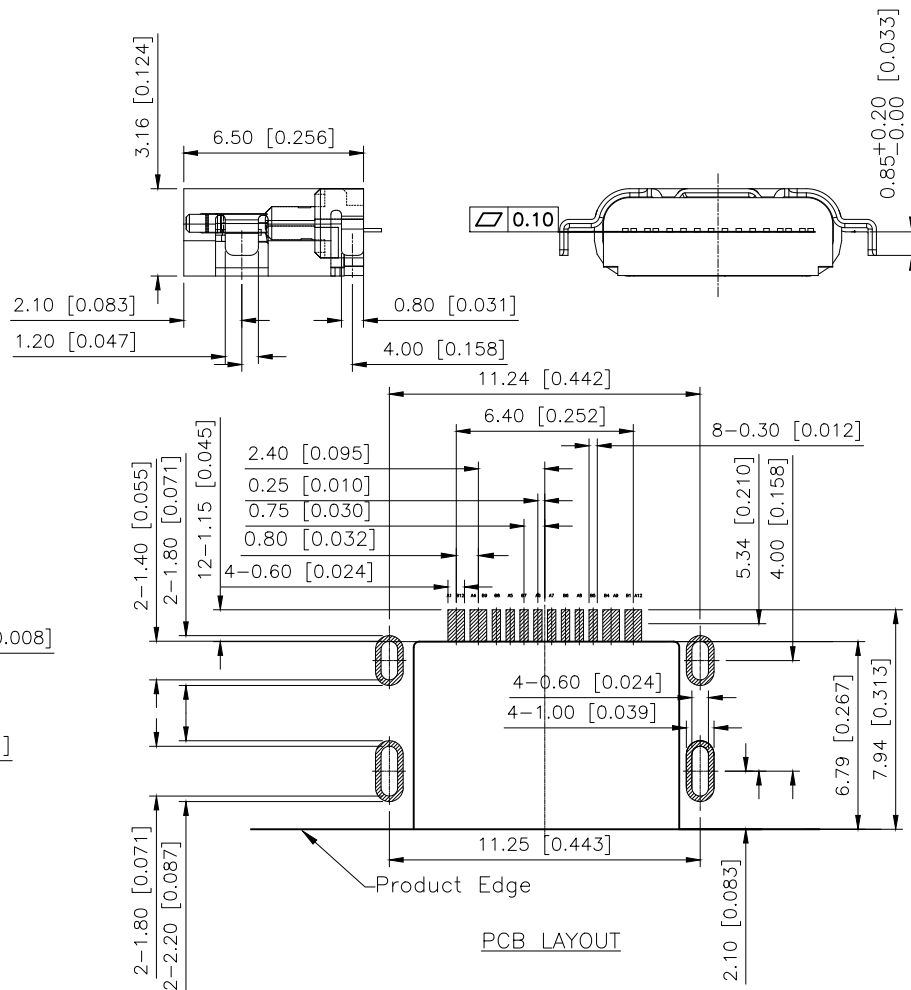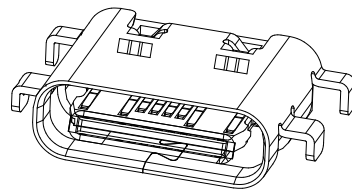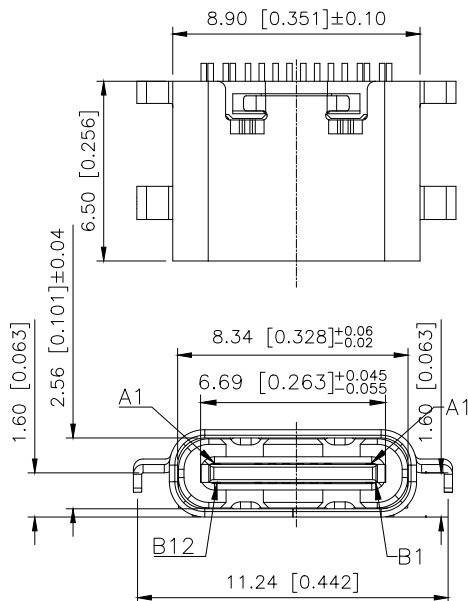

U262-16XN-4BC21665

1:AU 1U'' 1:PBT 1:WITH
2:AU 3U'' 2:PA6T 2:WITOUT
5:AU 15U'' 3:PA9T B:Black
6:AU 30U'' 4:LCP W:White

规格说明: Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
3.0A/contact terminal
- 额定电压: Voltage Rating
30V_DC
- 接触阻抗: Contact Resistance
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
- 端子保持力: Terminal Retention
1.0kgf (MIN)

原材料: Material:

- 塑胶: Housing:
Hing Temperature Thermoplastics,
- 端子: Contact: Copper Alloy C2680
- 外壳: She11: stainless steel 201

电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
端子整体镀30-50U'' (MIN)镍底, 镀金区域镀金1U''
- 外壳: She11:
铁壳整体镀镍底,
Nickel Plating

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBUS
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B12	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 3.1 TYPE C
CHECKED		UNIT: mm/in	PART NO.: U262-16XN-4BC21665
APPROVED		SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO., LIMITED			SCALE N/A
			PAGE 1/1
			REVISION A1