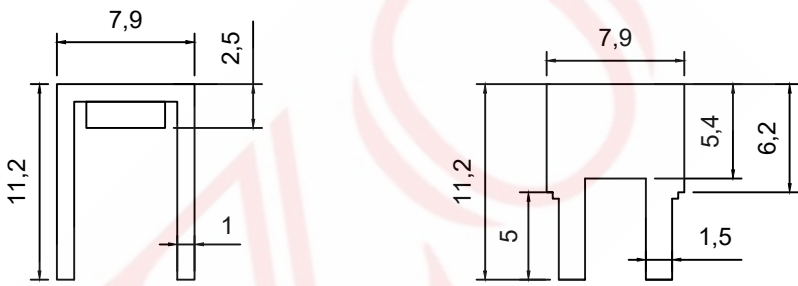

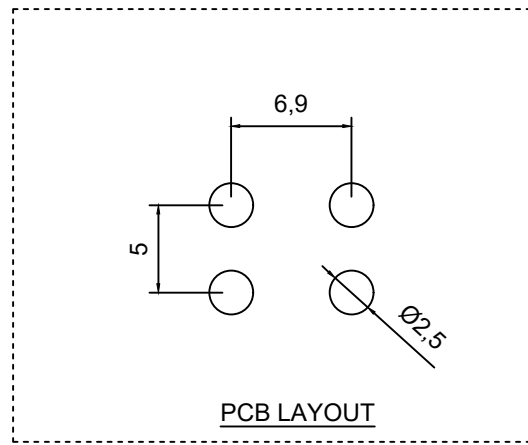



1		2		3		4		5		6		7		8	
SAMZO		REAC/ROHS								REV	ECN NO	DESRIPTION	DESIGN	APPROVAL	DATE
										A1	NEW	Replace frame			2013.02.12
E	技术要求: Technical requirements: 1.打铜底0.5-1UM,镍底2-2.5UM,哑锡3-5UM。 Copper base 0.5 - 1 UM, nickel base 2 - 2.5 UM, matte tin 3 - 5 UM. 2.不得有脚变形,毛刺等缺陷。 There shall be no defects such as pin deformation and burrs. 3.插脚尖部符合可焊性要求。 The tip of the insertion pin shall meet the solderability requirements. 4.螺纹需符合通止规要求。 The thread shall meet the requirements of the go and no-go gauge. 5.材质:黄铜H65。 Material: Brass H65. 6.过载电流: 55A Overload current: 55A 7.牙孔规格 M4 The specification of the threaded hole M4 8.未标注尺寸公差值按GB/T1184-1996H级 Unmarked dimensional tolerance values are in accordance with Grade H of GB/T1184-1996 9.螺丝扭力: 0.8Nm Screw torque: 0.8Nm 10.盐雾试验: 48小时 Salt spray test: 48H														
D															
C															
B															
79		62		50		C		L4		Pressing hole specification: M4 Mold number: CS013 Pin height: 5.0mm Height above the board: 6.2mm Specification size: 7.9*7.9mm					
ITEM		DESCRIPTION		MATERIAL		QTY		FINSH/COLOR		FIRST VIEW		The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM		TITLE:: 7.9*7.9*11.2 mm	
A		Subject		H62(Y2)		1		tin plating							
										GENERAL TOLERANCE				DWG NO: 79C-P013	
										SCALE		1:1		UNIT mm	
										DESIGN		WANGGUIFA		2018.06.12	
										CHECKED		ZHENGUILAN		2018.06.12	
										APPROVED		LILIANJIANG		2018.06.14	
										F					
1		2		3		4		5		6		7		8	