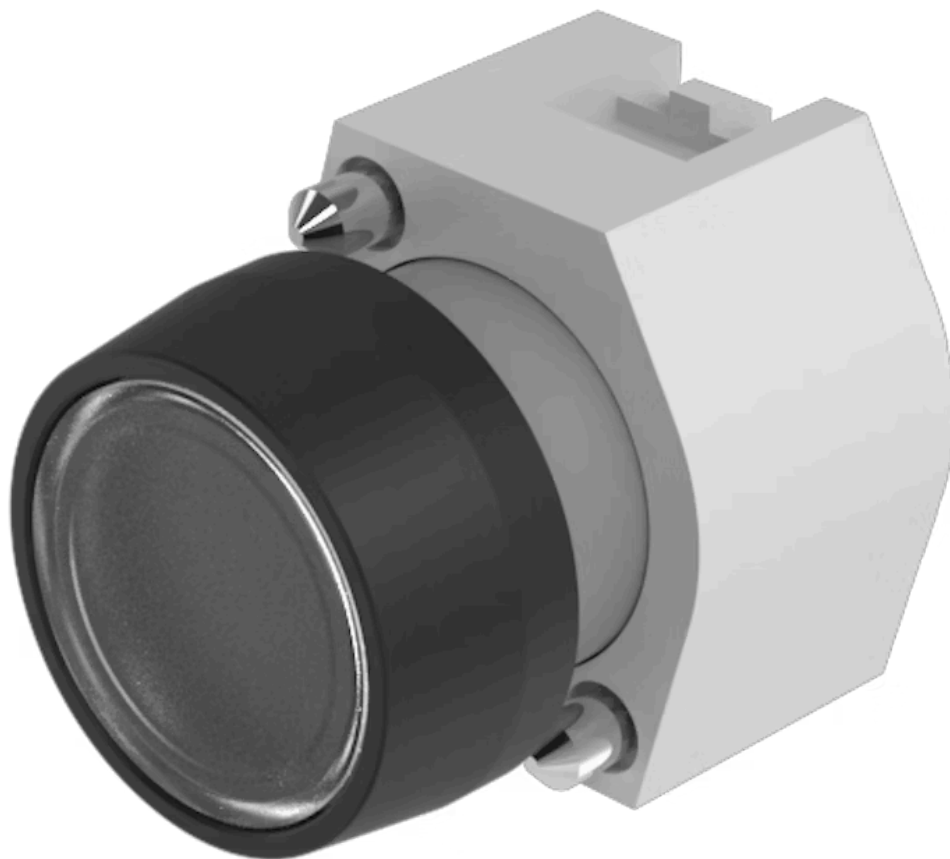


# Actuator

704.039.7

Distribution by  
DigiKey**DigiKey**<https://digikey.eao.com/p/704.039.7>

Your product:

---



## 704.039.7 Actuator

### FRONT

Front dimension:	Ø 29 mm
Front bezel colour:	Black
Front bezel material:	Plastic
Front form:	round

### MOUNTING

Design:	raised
---------	--------

### OPERATING-/INDICATION PART

Lens optics:	transparent
Lens shape:	flush
Lens illumination:	non illuminative
Lens colour:	Colourless
Lens material:	Plastic

### ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
------------	---

### MECHANICAL CHARACTERISTIC

Operating force:	8 N
Mechanical lifetime:	≤3 Mio. cycles of operation
Operating Travel:	ca. 5.8 mm ± 0.2 mm

**Switching action:** Maintained

**Weight:** 0.04 kg

## AMBIENT CONDITION

**IP Protection:** IP65 front side

**Storage temperature:** – 40 °C ... + 85 °C

**Operating temperature:** – 40 °C ... + 55 °C

## OTHER

**Housing colour:** Grey


**max. number of switching elements:** 3

**Hints:** Frontring with protective cover to be mounted with a torque of 0.4 Nm onto actuator, Max. 3 switching elements can be clipped on

**Housing material:** Plastic


**Short Description:** Actuator, Ø 29 mm, flush, non illuminative, Colourless, Plastic, transparent, round, Black, Plastic, Maintained

**Dimension drawings:**

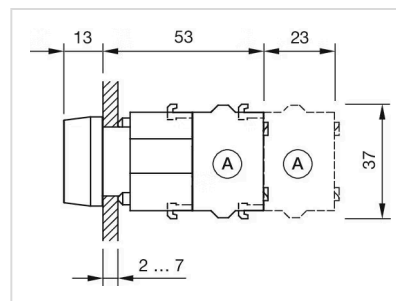


A = Screw terminal

**Wiring diagrams:**

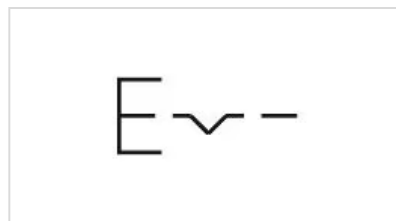

**Mounting cut-outs:**

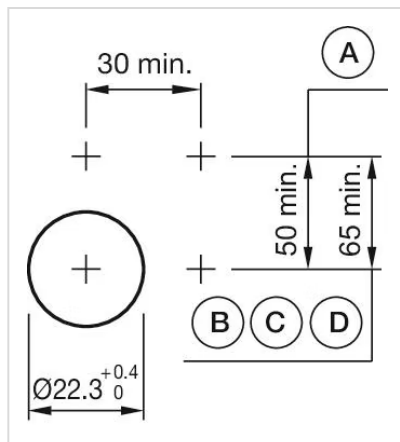

- A = Screw terminal
- B = Push-in terminal (PIT)
- C = Plug-in terminal 6.3 mm x 0.8 mm
- D = Double plug-in terminal 6.3 mm x 0.8 mm