


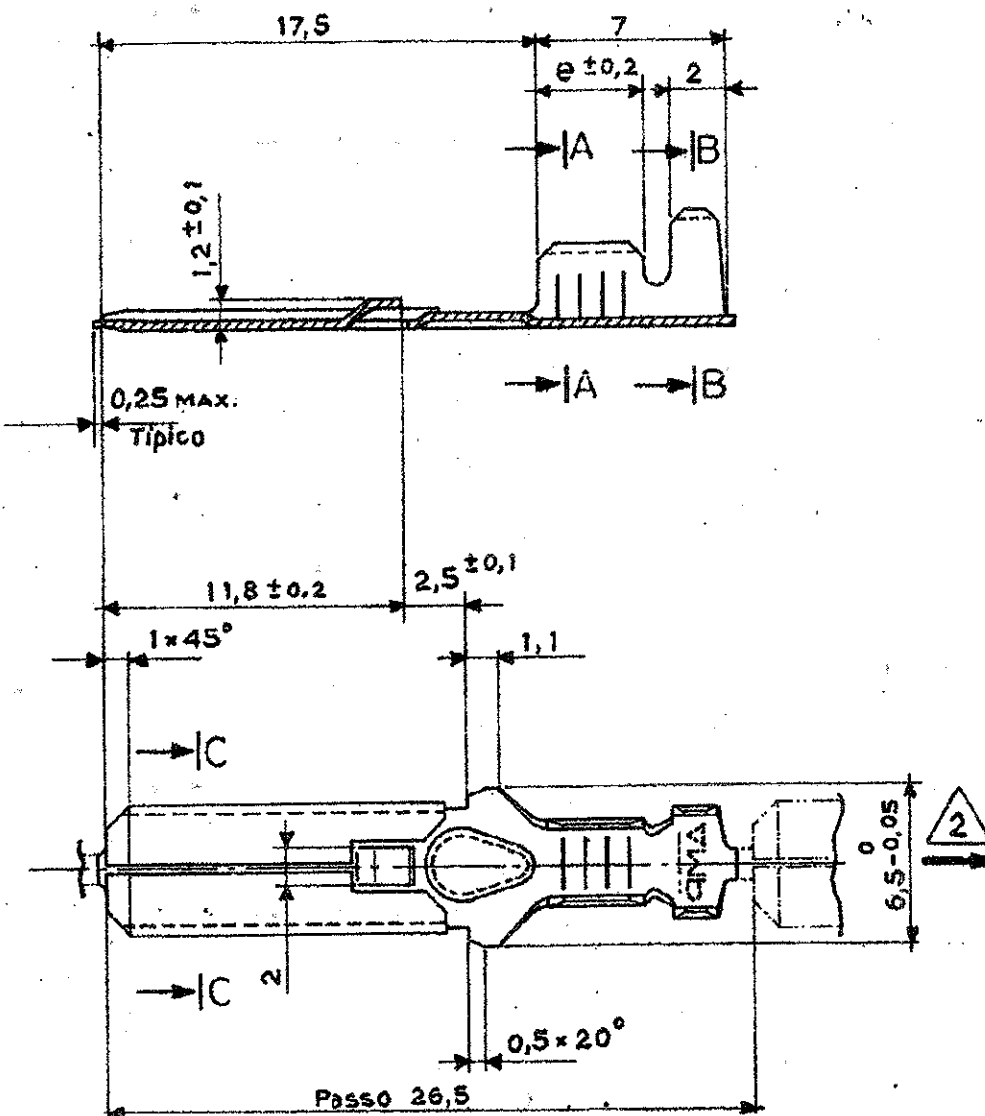

Note:

1) Stato di fornitura: Terminali in nastro avvolto su bobina di cartone. (Bobina Ø Est. 290 × 160 Largh.).

2) Senso di uscita del terminale dalla bobina.



3

| (WIRE)<br>SEZ. FILO<br>mm² | (INS. DIA. REDUCED)<br>Ø IS. RID. FASE 3 |
|----------------------------|------------------------------------------|
| 0.50                       | 1.5-1.7                                  |
| 0.75                       | 1.7-1.9                                  |
| 1.0                        | 1.9-2.1                                  |
| 1.5                        | 2.2-2.4                                  |


4

| (WIRE)<br>SEZ. FILO<br>mm² | (INS. DIA. STD)<br>Ø ISOL. STD | (INS. DIA. REDUCED)<br>Ø IS. RID. FASE 3 |
|----------------------------|--------------------------------|------------------------------------------|
| 0.50                       | 2.0-2.2                        | ---                                      |
| 0.75                       | ---                            | ---                                      |
| 1.0                        | 2.4-2.6                        | 1.9-2.1                                  |
| 1.5                        | 3.15-3.35                      | ---                                      |


Sezione C-C

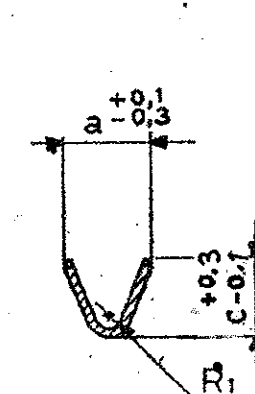

Sezione A-A

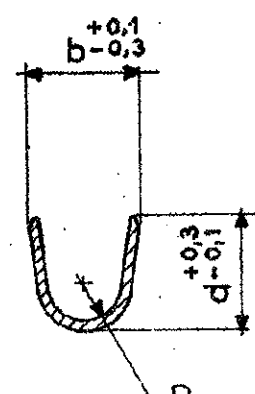

Sezione B-B  
(P/N 281869-1)



Sezione B-B  
(P/N 281870-1)

BSOLET

|     |     |     |     |     |     |     |                                        |                         |                     |                         |   |
|-----|-----|-----|-----|-----|-----|-----|----------------------------------------|-------------------------|---------------------|-------------------------|---|
| 3,2 | 4,0 | 3,2 | 3,5 | 4   | 0,6 | 1,5 |                                        |                         | 0,5-15<br>mm²       | 282164-1                | 3 |
| 5,2 | 7,0 | 4   | 5,5 | 3,5 | 1,1 | 1,6 |                                        |                         | 1+1<br>mm²          |                         | 4 |
| 3,2 | 4,2 | 3,2 | 4,4 | 4   | 0,6 | 1,5 |                                        |                         | 0,5<br>÷ 1,5<br>mm² | 281869-1                | 4 |
| a   | b   | c   | d   | e   | R1  | R2  | FINITURA / COLORE<br>(FINISH / COLOUR) | MATERIALE<br>(MATERIAL) | SEZ.<br>FILO        | NUMERO<br>(PART NUMBER) |   |

CUSTOMER DWG.  
FOR REFERENCE ONLY

DISEGNO PER CLIENTE  
SOLO PER RIFERIMENTO

THIS DRAWING IS UNPUBLISHED. RELEASE FOR PUBLICATION 1987  
COPYRIGHT 1987 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING.  
TOLLERANZE: SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES UNLESS OTHERWISE SPECIFIED) ± 0,3  
ANGOLI (ANGLES) ± 2°  
DIA. ISOLANTE (INS. DIA. RANGE) Ø 3,35 MAX.  
RANGO FILO (WIRE RANGE) Ved. Tabella.  
DESCRIZIONE (DESCRIPTION) Contatto Maschio per Connettore Passo 5 mm.

**TE** TE Connectivity

LOC. SIZE NUMERO (MASTER DWG) REV. FOLIO (SHEET)  
1A3 C-281869- G2 1

PRODUCT RESTRICTED TO FIAT S.P.A. AND FIAT SUBSIDIARIES HARNESS MAKERS

DISTRIBUZIONE  
(PRINT DIST)