

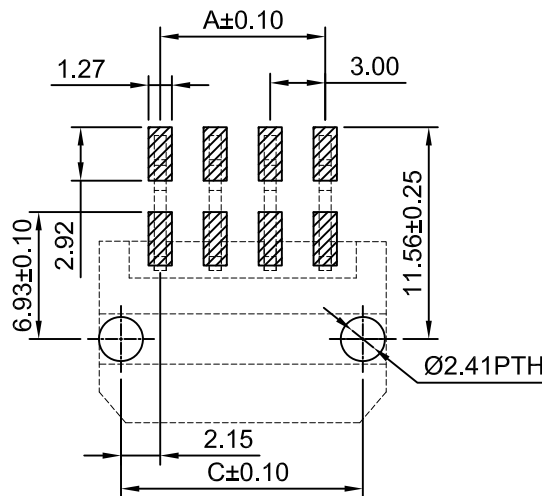


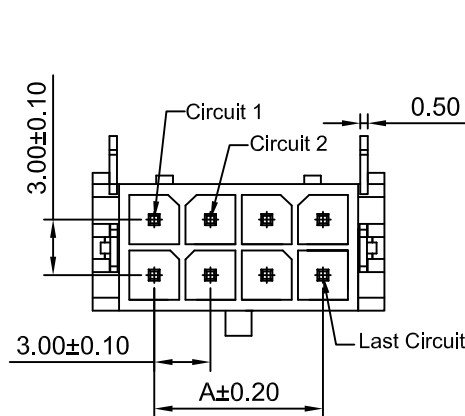

P.C.B LAYOUT
TOLERANCE:±0.05

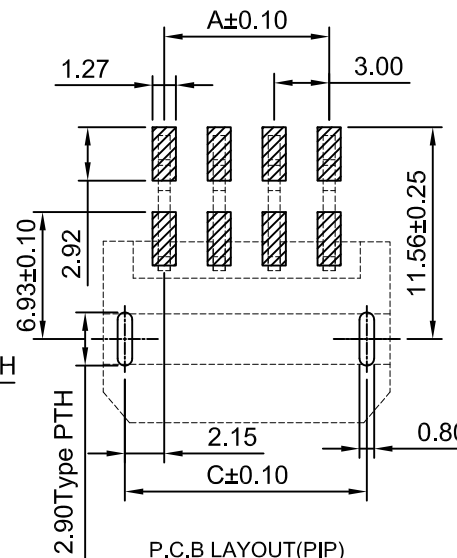

P.C.B LAYOUT (PIP)
TOLERANCE:±0.05

Ordering Information:

C3030WR-S-F-2xXP - *** - *** - ***
1 2 3 4

1.Part NO.

2.Size(H):

(Blank):2.00mm

H30:3.00mm

3.Material:

(Blank):LCP,UL94V-0

GWT:LCP,UL94V-0,GWT 750°C

4.Finish:

(Blank):Tin over Nickel

G:Gold over Nickel(1"U)

G3:Gold over Nickel(3"U)

G15:Gold over Nickel(15"U)

G30:Gold over Nickel(30"U)

SPECIFICATIONS:

Current Rating: 8.5A AC,DC (AWG #18)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min



Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x1P	--	6.65	4.30	2x7P	18.00	24.65	22.30
2x2P	3.00	9.65	7.30	2x8P	21.00	27.65	25.30
2x3P	6.00	12.65	10.30	2x9P	24.00	30.65	28.30
2x4P	9.00	15.65	13.30	2x10P	27.00	33.65	31.30
2x5P	12.00	18.65	16.30	2x11P	30.00	36.65	34.30
2x6P	15.00	21.65	19.30	2x12P	33.00	39.65	37.30

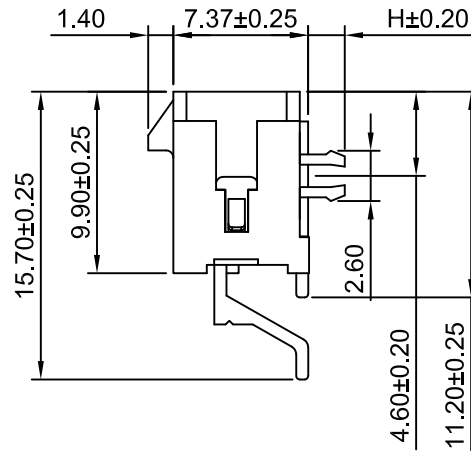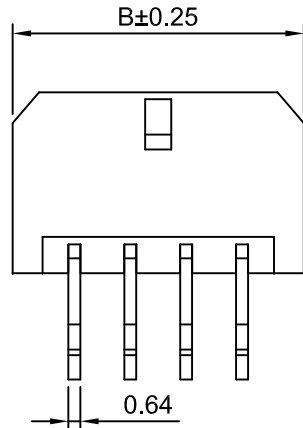

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm
Scale: 2.5:1
Sheet: 1 of 1

DRAWN: Haisen Li
CHKD: Djankui Wan
APPR: Jack Yin

General Tolerances:
x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°



TITLE
3.00mm PITCH
RIGHT-ANGLEDUAL ROW WAFER-
SMT TYPE

DRAWING NO. C3030WR-S-F-2xXP
REV A4

A4	CHANGE THE DRAWING	2022.08.17
A3	CHANGE THE DRAWING	2022.08.17
A2	CHANGE THE DRAWING	2022.01.15
A1	CHANGE THE Current Rating	2018.12.19
A0	NEW RELEASE	2009.05.10
REV	DESCRIPTION	DATE