
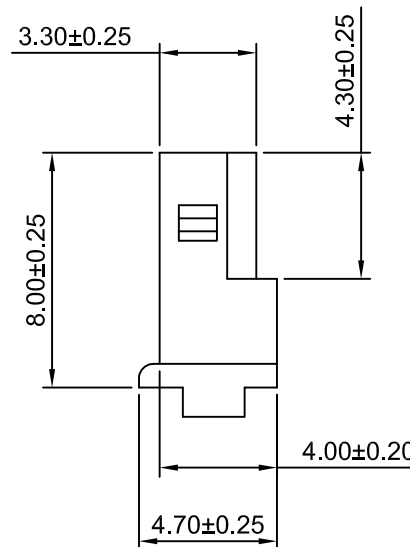
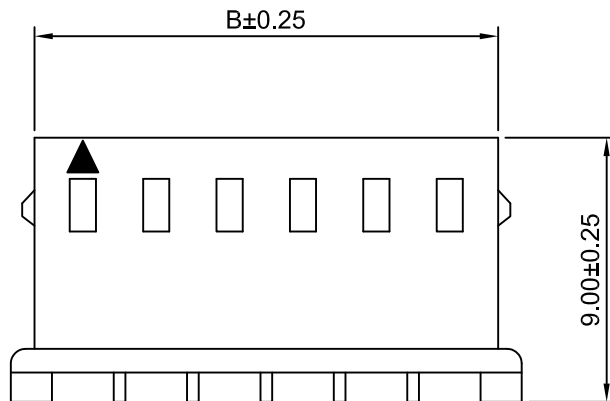
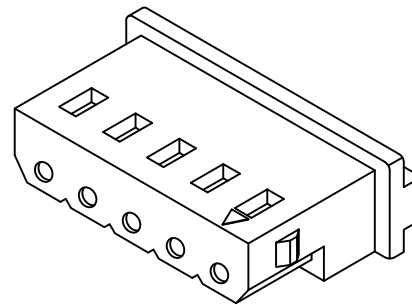


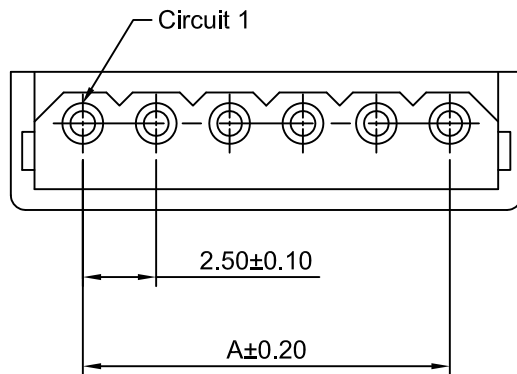

Ordering Information:

A2505H-XP - ***
1 2

1.Part NO.

2.Color:

(blank): Beige

BK: Black

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2505H-2P	2.50	5.80
A2505H-3P	5.00	8.30
A2505H-4P	7.50	10.80
A2505H-5P	10.00	13.30
A2505H-6P	12.50	15.80
A2505H-7P	15.00	18.30
A2505H-8P	17.50	20.80
A2505H-9P	20.00	23.30
A2505H-10P	22.50	25.80
A2505H-11P	25.00	28.30
A2505H-12P	27.50	30.80
A2505H-13P	30.00	33.30
A2505H-14P	32.50	35.80
A2505H-15P	35.00	38.30
A2505H-16P	37.50	40.80
A2505H-17P	40.00	43.30
A2505H-18P	42.50	45.80
A2505H-19P	45.00	48.30
A2505H-20P	47.50	50.80

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	4:1	1 of 1	2.50mm PITCH HOUSING		
DRWN	CHK'D	APPR			
Dengchun Yi	Dlankut Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO. A2505H-XP	
x.xx±0.25					
x.xxx±0.20					
x.xxxx±0.15				REV A2	
ANGLES ±1°					

A2	ADD THE INFORMATION	2020.08.17
A1	CHANGE THE DRAWING	2015.01.12
A0	NEW RELEASE	2013.09.11
REV	DESCRIPTION	DATE