

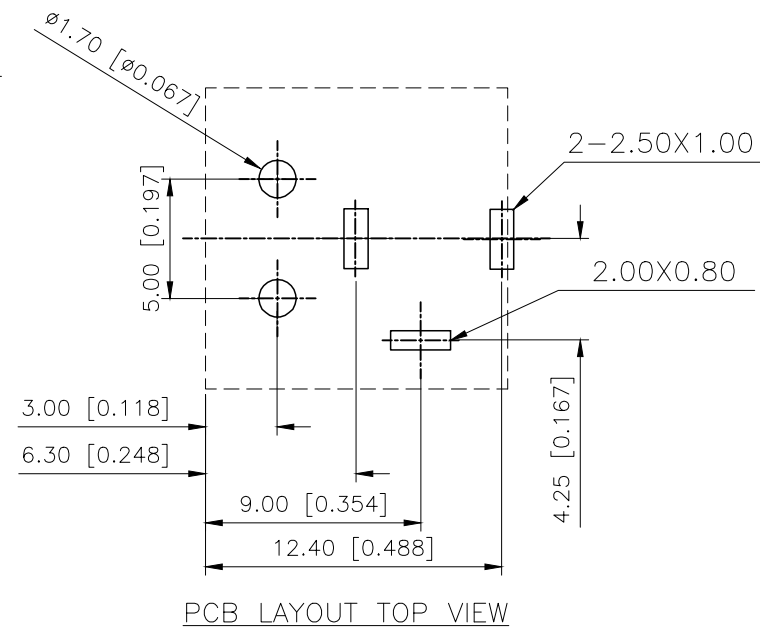
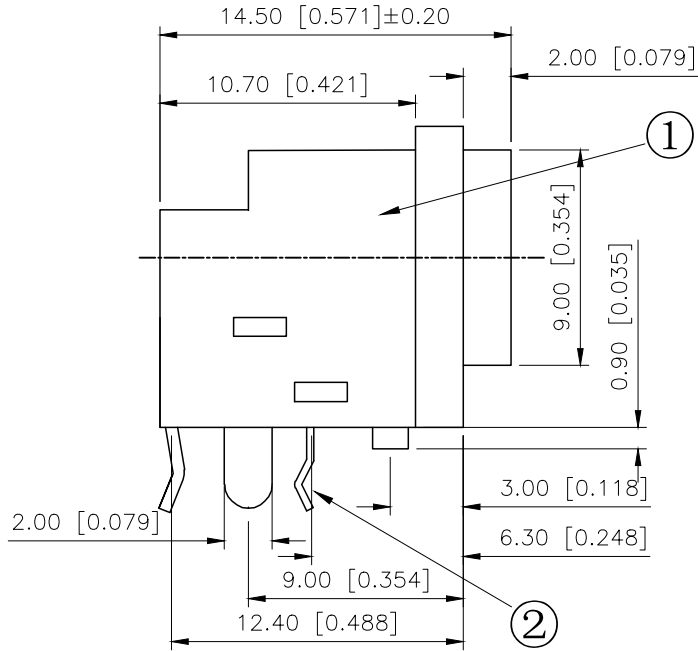



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		参照实物修正图纸, 图面升级整理图面	2024.9.12	阿树

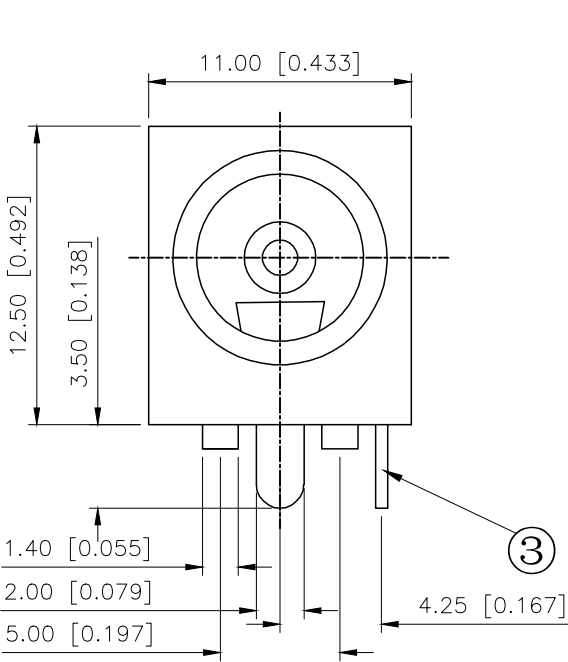

CIRCUIT DIAGRAM

SPECIFICATIONS:

Rating: 30V DC 0.5A
Contact resistance: $\leq 30\text{m}\Omega$
Insulation resistance: $\geq 100\text{M}\Omega$ DC250V
Withstanding voltage: AC 500V
R.M.A.FOR 1MINUTE
Plugging force: 3~20N
Life test: 5000 CYCLES

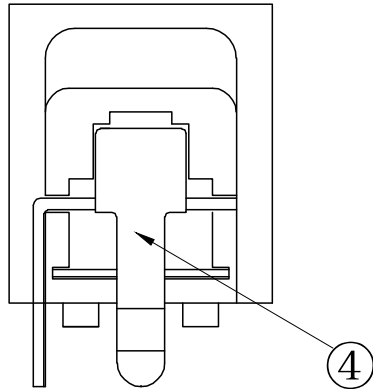

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN
CHECKED
APPROVED

阿树

VIEW:

UNIT: mm/in

SIZE: A4

MODEL TYPE:
DC POWER JACK

PART NO.:
DC-038

DWG NO.:

SCALE	PAGE	REVISION
N/A	1/1	A1