




Connectors > D-Shaped Connectors > D-Sub Connectors > PCB D-Sub Connectors > D-Sub Receptacle Assembly: Vertical, Shell Size 3, 2.77mm

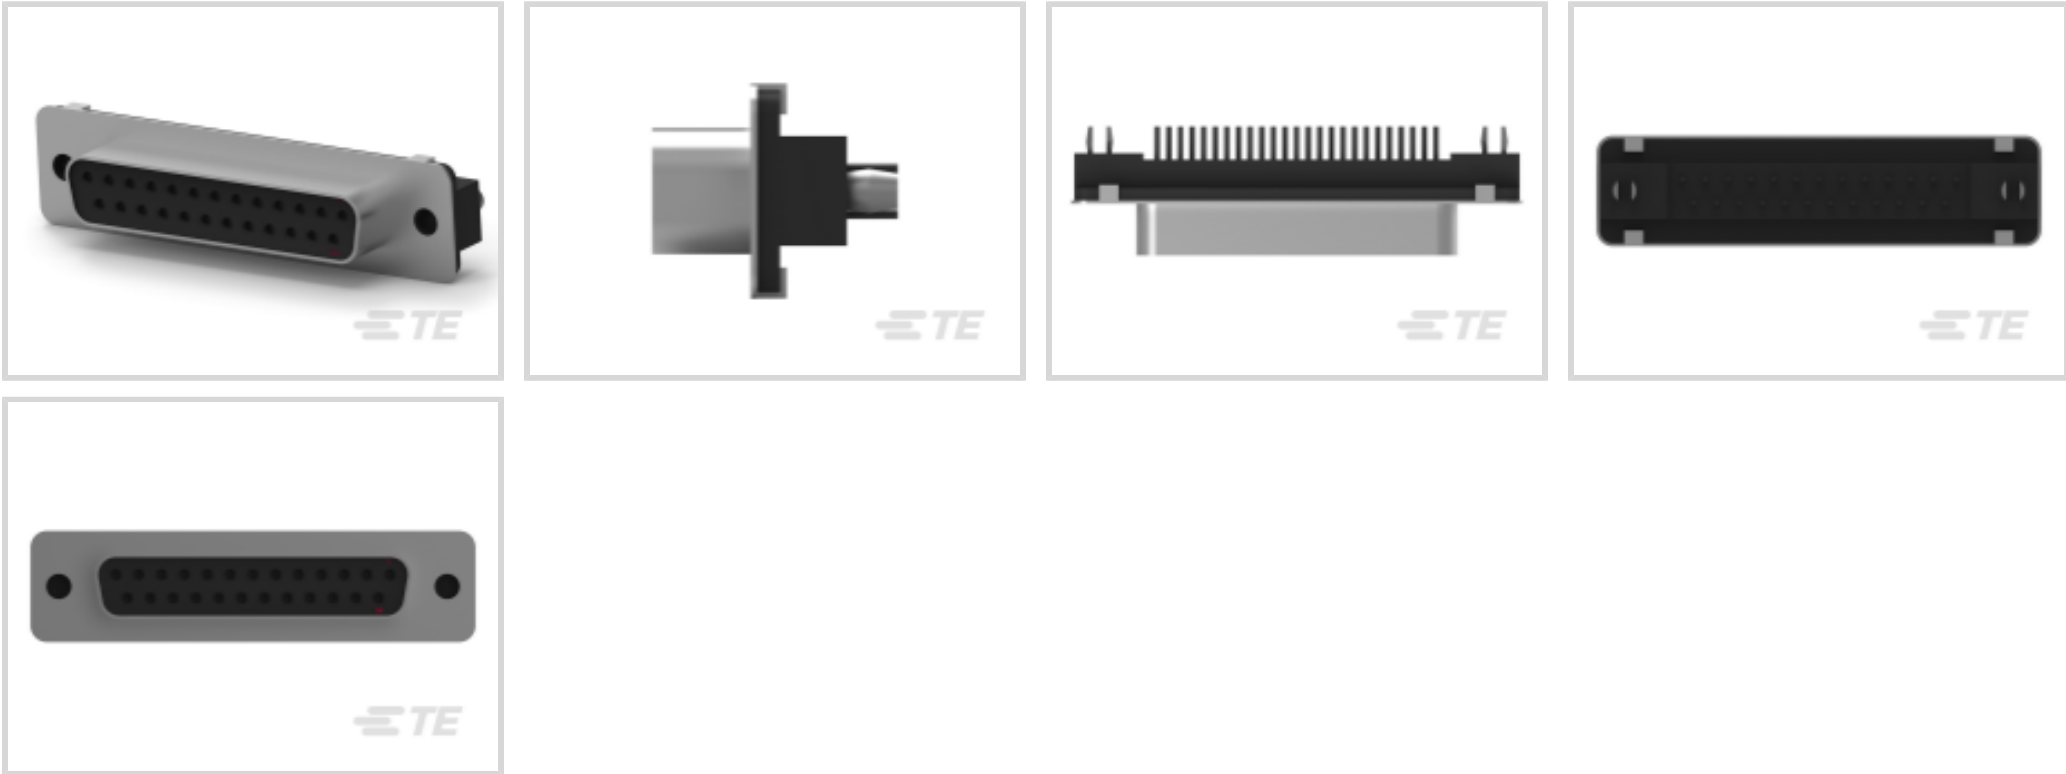

Connector & Housing Type: **Receptacle**

Connector System: **Board-to-Board**

Number of Positions: **25**

Centerline (Pitch): **2.77 mm [.109 in]**

Number of Rows: **2**

[All D-Sub Receptacle Assembly: Vertical, Shell Size 3, 2.77mm \(64\)](#)

Features

Product Type Features

Shell Material Configuration	Front Metal Shell
Connector & Housing Type	Receptacle
Connector System	Board-to-Board
Connector Shell Size	3
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	25
Number of Rows	2
PCB Mount Orientation	Vertical

Body Features

Assembly Process Feature Material	Brass
Insert Material	Brass



Shield Plating Material	Tin
Shield Material	Steel
Shell Plating Material	Tin
Primary Product Color	Black
Connector Profile	Standard

Contact Features

Contact Options	Installed
PCB Termination Area Plating Finish	Bright
	30 µin
Contact Mating Area Plating Material	Gold
Contact Underplating Material	Copper
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Shape & Form	Round
Contact Current Rating (Max)	6 A

Termination Features

Termination Post & Tail Diameter	.66 mm[.026 in]
Termination Post & Tail Length	3.18 mm[.125 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Assembly Process Feature Plating Material	Tin over Copper
Mounting Hole Diameter	3.07 mm[.121 in]
PCB Mount Retention	With
PCB Mount Retention Type	4-40 Retention Insert
Mating Retention	Without
Connector Mounting Type	Board Mount

Housing Features

Shell Material	Carbon Steel
Housing Material	Thermoplastic
Centerline (Pitch)	2.77 mm[.109 in]

Dimensions

PCB Thickness (Recommended)	1.57 mm[.062 in]
-----------------------------	------------------



Row-to-Row Spacing2.84 mm[.112 in]

Usage Conditions

Operating Temperature Range-55 – 105 °C[-67 – 221 °F]

Operation/Application

ShieldedYes
Circuit ApplicationSignal

Industry Standards

Compatible With Approved Standards ProductsUL E28476
UL Flammability RatingUL 94V-0

Packaging Features

Packaging Quantity10
Packaging MethodTube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (3.7% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # CAT-AM7-H3
IDC D-Sub: Plug Assembly, Low Profile, Signal, 2.77 mm

TE Part # CAT-AM7-248H3
IDC D-Sub: Plug Assembly, Wire to Wire, Signal, 2.77 mm

TE Part # CAT-AM7-248H4
IDC D-Sub: Connector Kit, Plug, Wire to Wire, Signal, 2.77 mm

Also in the Series | AMPLIMITE HD-20

PCB D-Sub Connectors(353)

Customers Also Bought

TE Part #6609109-4
PE0S0DLXC M0=C7031

TE Part #5-534206-8
16 MODII VRT DR CE 100/115

TE Part #5-104071-5
25 SYSTEM 50 HDR SRST SHRD SN


TE Part #3-1617108-2
PRMAC-26X=PRMA COTS TO-5 RELAY

TE Part #2307815-6
6P,2MM,BB,REC,SRVT,SMD,AU.76,TR,W/CP

TE Part #1-1586040-4
14P VAL-U-LOK VRT HDR W/P V0

TE Part #9-1617515-1
3SBH1195A2=M39016/53-006L

TE Part #20003318-00
PRESS XDCR M32JM-00000E-010BG

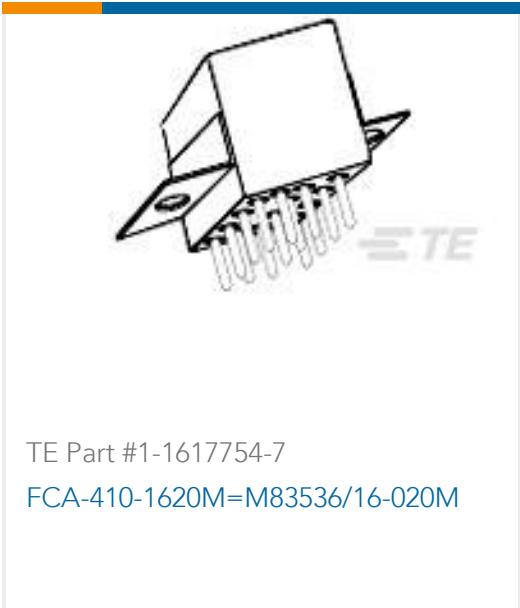

Documents

Product Drawings

25 RCPT SP/FMS BRDLK

English

CAD Files

Customer View Model

ENG_CVM_CVM_2-5747708-0_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-5747708-0_A.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_2-5747708-0_A.2d_dxf.zip

English

3D PDF

3D

3D PDF

English

Customer View Model

ENG_CVM_2-5747708-0_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_2-5747708-0_A.3d_igs.zip

English

Customer View Model

ENG_CVM_2-5747708-0_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

AMPLIMITE Subminiature D Connectors - Straight Posted Connectors

English

Product Specifications

Application Specification

English



[Agency Approvals](#)

[UL Report](#)

English