
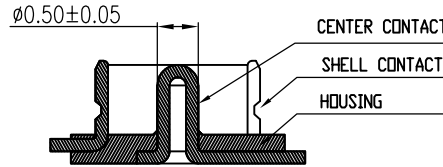


由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作

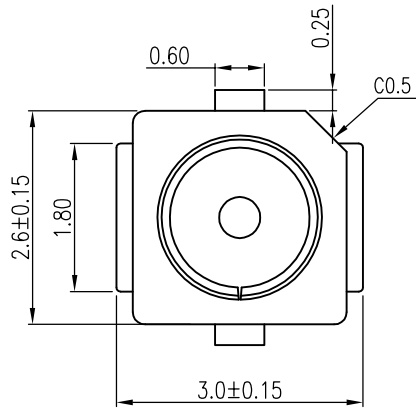





NOTES :

1.0. RATING :


- 1.1. VOLTAGE :60 VAC (R.M.S.)
- 1.2. NOMINAL CHARACTERISTIC IMPEDANCE: 50 Ohm
- 1.3. APPLICABLE FREQUENCY: DC ~ 6GHz
- 1.4. VSWR: 1.3 MAX. (DC~3GHz), 1.5 MAX. (3~6GHz)
- 1.5. TEMPERATURE : -40°C TO +85°C
- 1.6. APPLIED TO IR SOLDERING PROCESS

2.0. MATERIAL SEE BILL OF MATERIAL :

- 2.1.HOUSING: THERMOPLASTIC,UL94V-0,
- 2.2.CENTER CONTACT : COPPER ALLOY.
- 2.3.SHELL CONTACT: COPPER ALLOY.

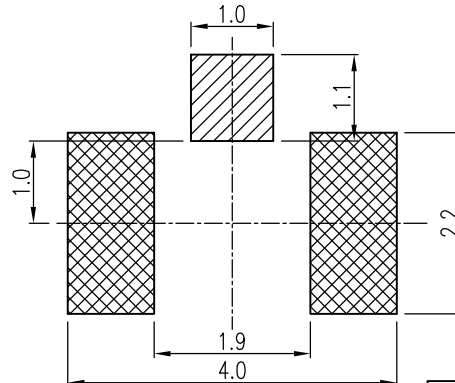

RECOMMENDED PCB LAYOUT
(TOLERANCE:±0.05)



 深圳市万骏达电子有限公司 http://www.wanjunda.com	图号 (DWG NO)		单位 (UNIT): MM
	版本 (REV)		比例 (SCALE) 1:1
品名 (ITEM NO)	IPEX天线座 第一代	日期 (DATE)	
料号 (PART NO)	RF-IPEX-SMT-01	设计 (DESIGN)	
模号 (MODEL NO)		审核 (CHECKED)	
		核准 (APPROVED)	
			未注公差 TOLERANCE UNSPECIFIED X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X" ±5" X.X" ±2"