

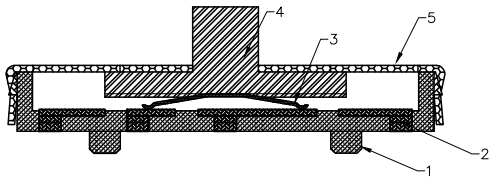
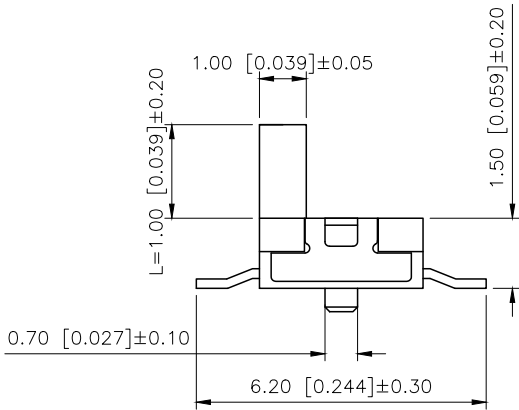
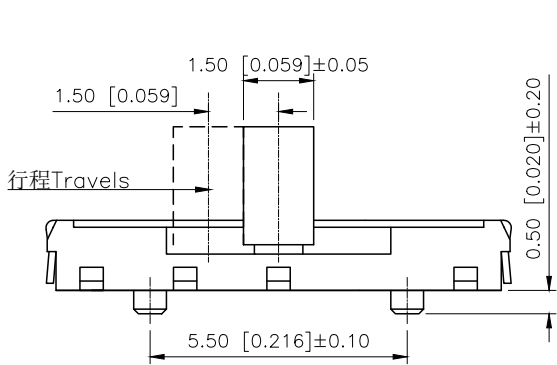


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.04.02	阿树

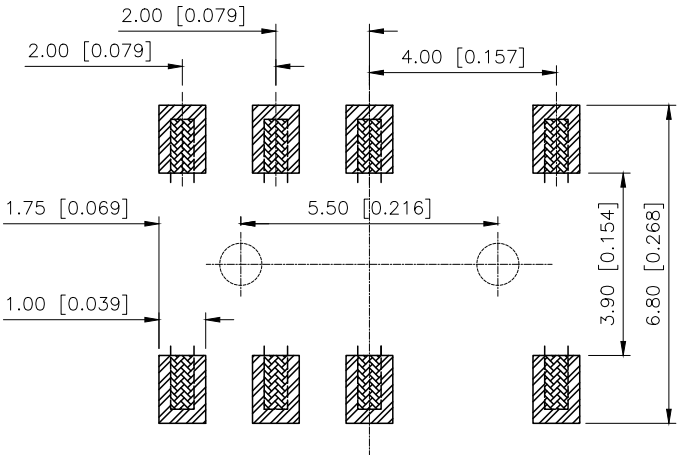


PAPT NO	L
SS-1400S-L0	1.0

Specifications(规格):
Contact resistance(接触电阻):≤100mΩ Max
Insulation resistance(绝缘电阻):≥100MΩ Min
Voltage Proof(耐压值):≥AC 250V(50-60Hz)/minute
Operating Force(动作力): 200gf±70gf
Mating cycles(使用寿命): 1000 cycles Min
Temperature range(使用温度):-25℃~+85℃

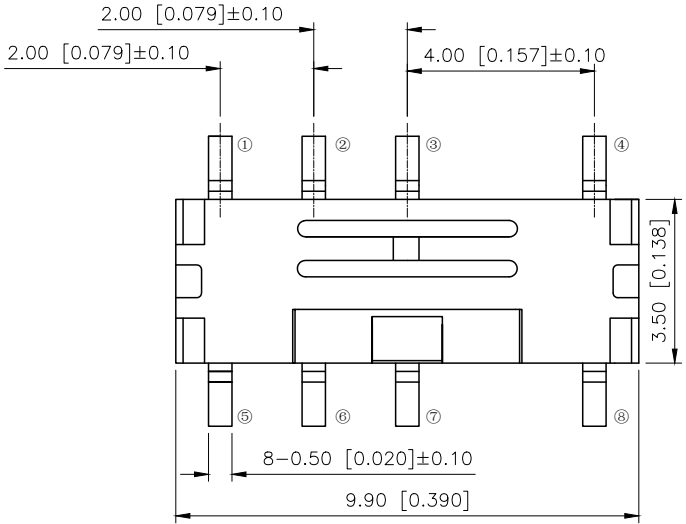

安装图 (PCB LAYOUT PLAN)



5	Cover	SUS	Natural	1
4	Push handle	PA46	Black	1
3	Reeds	Phosphor bronze silver-plated	silvery white	2
2	Terminal	Phosphor copper is silver-plated	silvery white	8
1	Housing	LCP	Black	1
ITEM	PAPT NAME	MATERIAL	COLOR	QTY

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: SLIDE SWITCH
CHECKED		UNIT: mm/in	PART NO.: SS-1400S-L0
APPROVED		SIZE: A4	DWG NO.: