




REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED	01FEB2017	K.S	D.Z


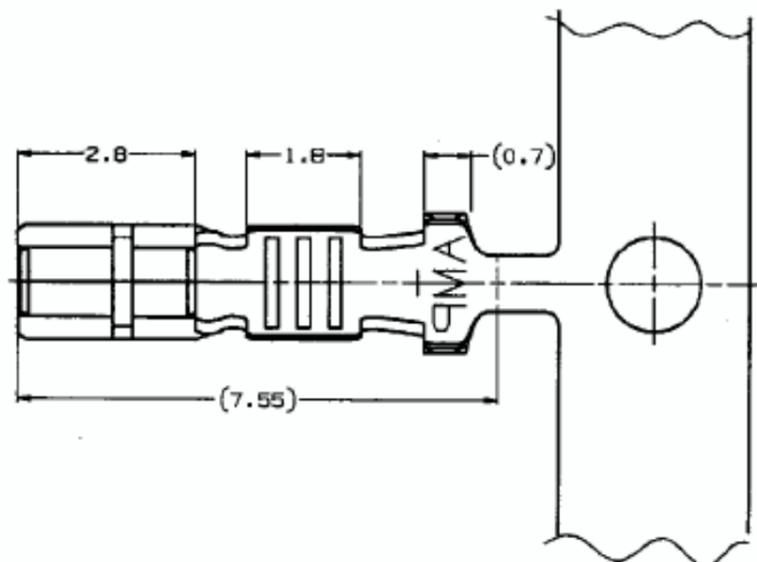


SECT. A-A



SECT. B-B

MATE 0.64SQ. POST
0.64角 ポストと嵌合

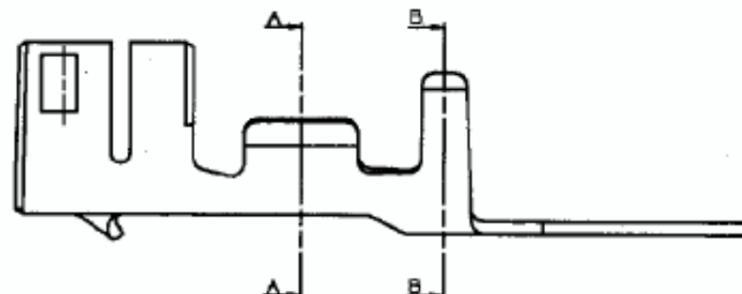


1. APPLICABLE HOUSING P/N: 2232568, 2232571, 2232569, 2232570, 2315883

∅0.93-∅1.5mm	0.12-0.35mm ² (AWG#26-#22)	PRE TINNED PHOSPHOR BRONZE(0.2+)	2232576-1
INSULATION DIA	WIRE RANGE	MATERIAL & FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: ㎜



MATERIAL
材料 SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:
一般公差 ±0.2

- 0-PLC ±
- 1-PLC ±
- 2-PLC ±
- 3-PLC ±
- 4-PLC ±
- ANGLES ±3°

FINISH
仕上 SEE TABLE

DWN	01FEB2017
K.SAKAI	
CHK	01FEB2017
DANIEL ZHANG	
APVD	01FEB2017
DANIEL ZHANG	
PRODUCT SPEC	108-5459
APPLICATION SPEC	114-5203
WEIGHT	0.09g

TE Connectivity		NAME 名称 2.5mm SIGNAL DOUBLE-LOCK RECEPTACLE CONTACT (M)	
		SIZE	A3
CAGE CODE	-	DRAWING NO	①-2232576
CUSTOMER DRAWING		RESTRICTED TO	-