


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.15	阿树

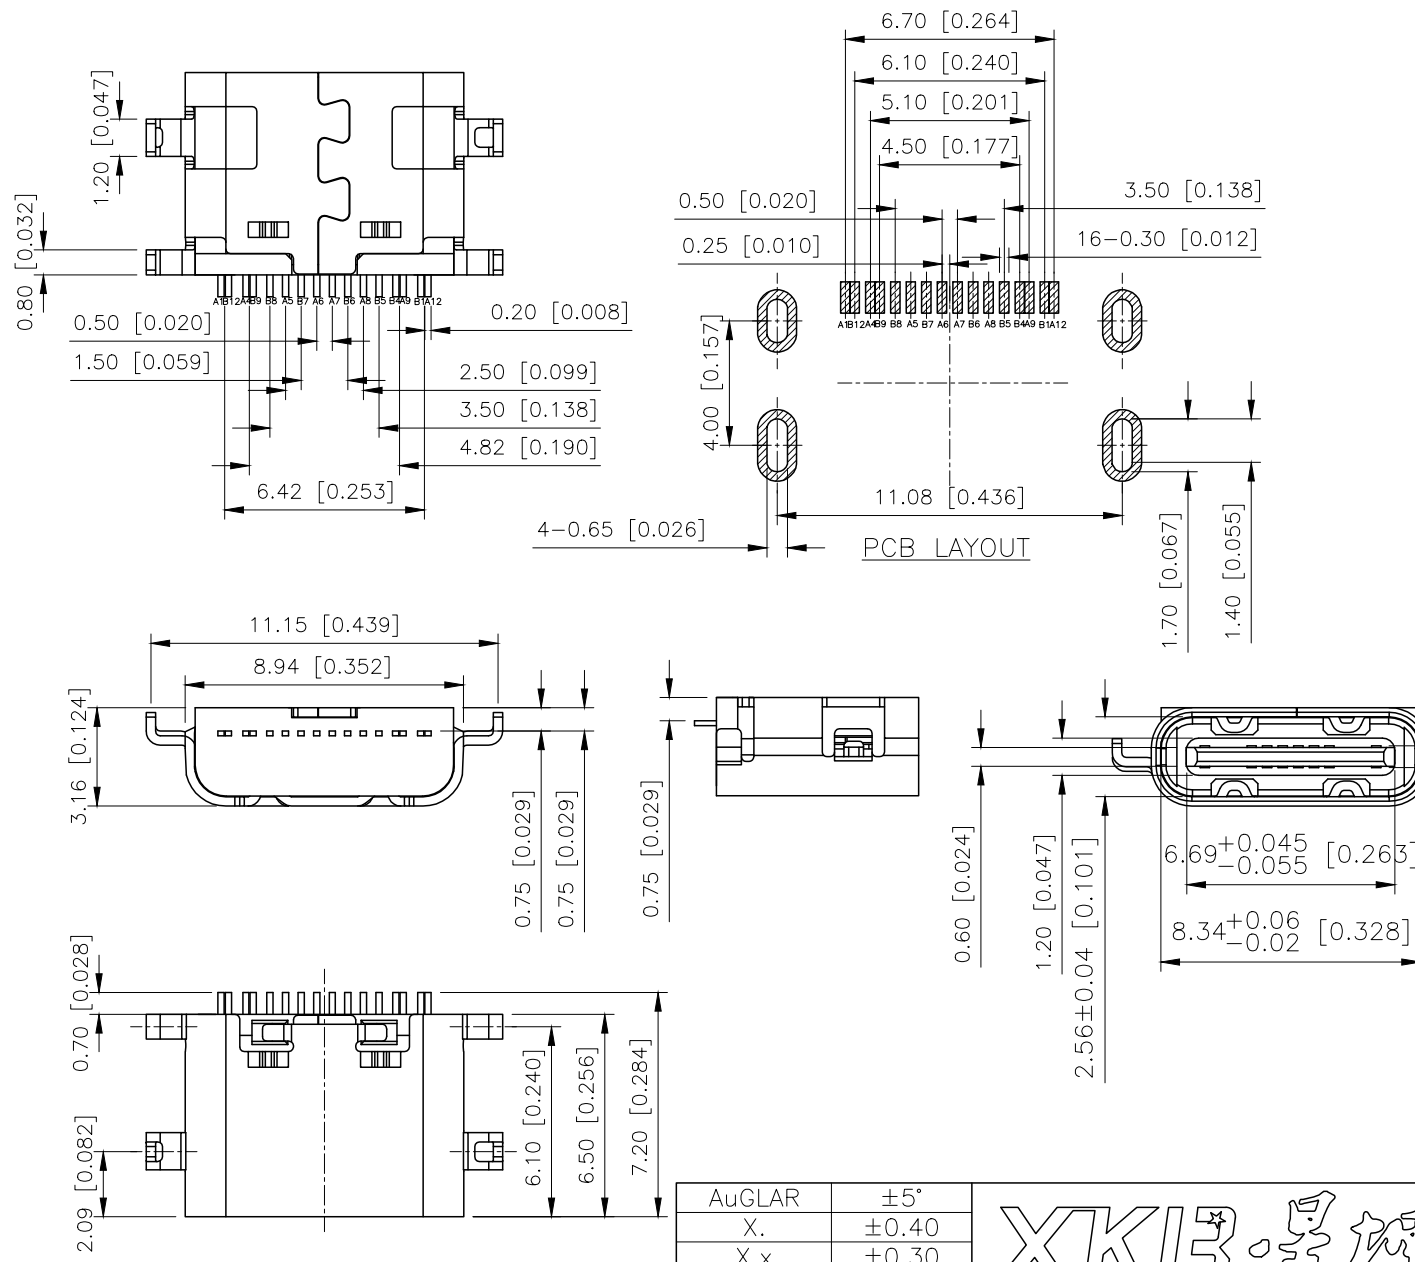

- SPECIFICATION:
- Material
Housing Material:High temperature thermoplastic
Contact Terminal:High Grade Copper Alloy
Merallic Shell:Stainless Steel
Inner Ground Cover Shell:Stainless Steel
Mid Plate:Stainless Steel
 - Mechanical:
2.1.Mating force:5-20Nf;
2.2.Unmating force:Initial:8-20Nf;Final:6-20Nf;
2.3.Durability:5000 Cycles;
 - Electrical:
3.1.Current Rating:3A
3.2.Voltage Rating:20V Max.;
3.3.Dielectric Withstanding volage:100Vac,60S,10mA;
3.4.Contact resistance:40m Ohms Max.;
3.5.Insulation Resistance:100M Ohms Min.;
 - Environmental:
4.1.Operating temperature:-40°C~+85°C;
4.2.Salt Spray Test:24H Min.(No oxidation or rust);

U262-16XN-4BC20865

1: Au1u"
2: Au3u"
4: Au15u"
5: Au30u"

1: WITH
2: WITHOUT

1: PBT
2: PA6T
3: PA9T
4: LCP

W: WHITE
B: BLACK

AuGLAR	±5°		DESIGN	阿树	VIEW: 	MODEL TYPE: USB TYPE C SMT-16PIN PLUG		
X.	±0.40		CHECKED		UNIT: mm/in	PART NO.: U262-16XN-4BC20865		
X.x	±0.30		APPROVED		SIZE: A4	DWG NO.:		
X.xx	±0.20							
X.xxx	±0.15							
UNSPECIFIED TOLERANCES						SCALE		
www.xk-dg.cn		XKB INDUSTRIAL PRECISION CO.,LIMITED				N/A		
						PAGE		
						1/1		
						REVISION		
						A1		