



Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
PCK

A
B
C
D
E
F

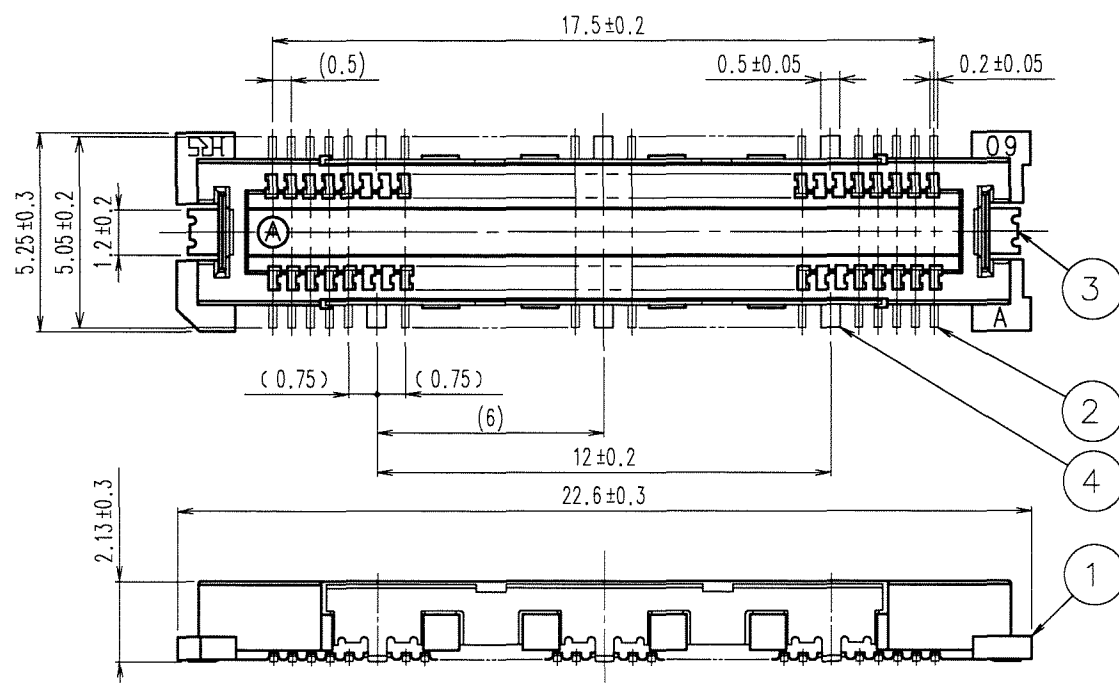


RECOMMENDED LAND PATTERN DIMENSION OF PCB

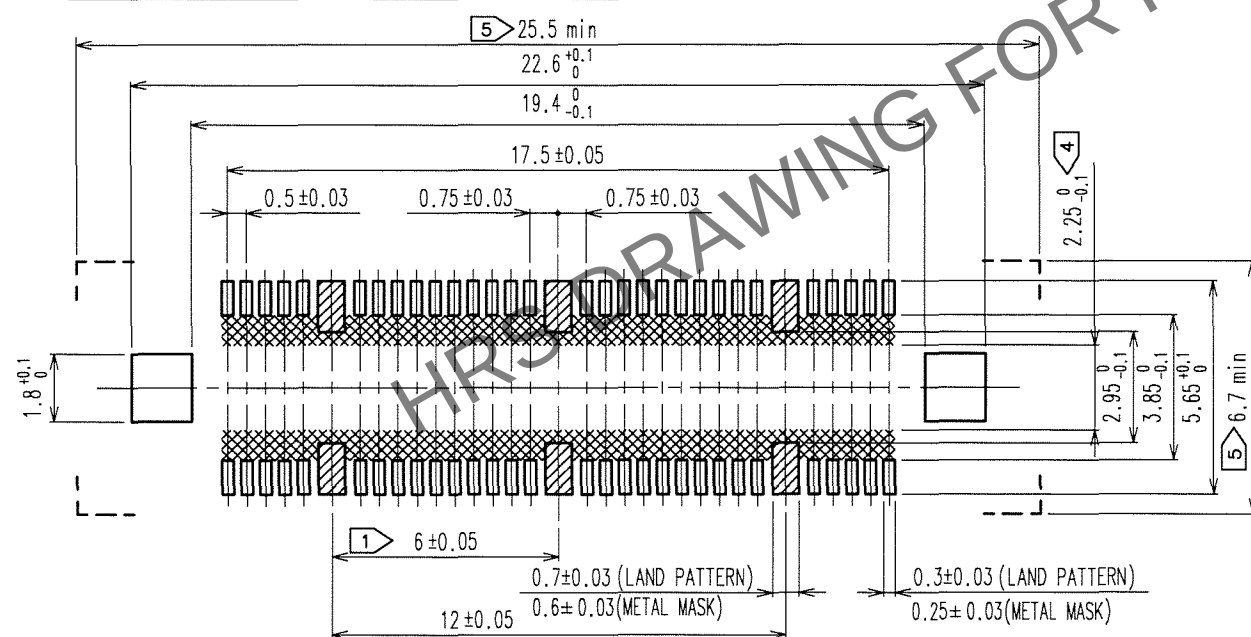


- NOTES
- 1 6 HATCHED  PARTS: GROUND CIRCUIT.
 - 2 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 4 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
 - 5 DO NOT MOUNT OTHER DEVICES ONTO  AREA, OR MATING PAIR CANNOT BE MATED.
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				.	△				.
△				.	△				.
△				.	△				.

SIGNAL PORTION CROSS SECTION (10:1)

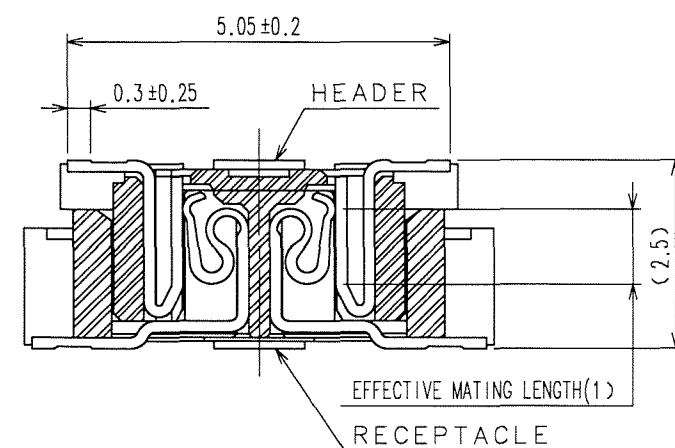

GROUND PORTION CROSS SECTION (10:1)

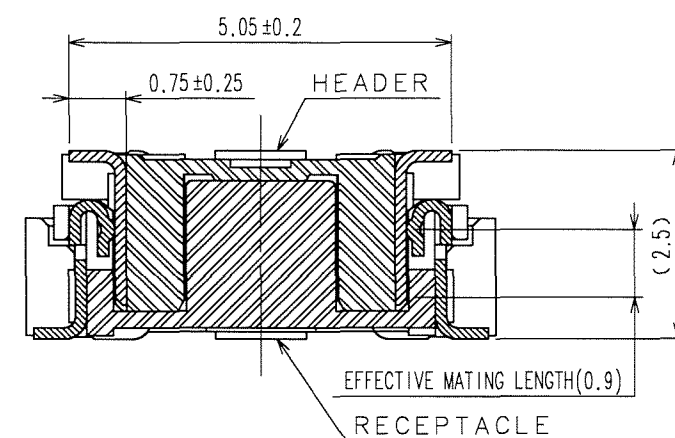

3, 4	PHOSPHOR BRONZE	TIN-PLATING	2	COPPER ALLOY	CONTACT AREA: GOLD 0.1 μm min.
1	LCP	BEIGE UL94V-0			LEAD AREA: GOLD FLASH
					UNDER PLATING: NICKEL 1 μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED
			S.KAMIGA		
			06.05.13	06.05.13	06.05.13
DRAWING NO. EDC3-152601-25			PART NO. FX11B-60P/6-SV(71)		
SCALE 5 : 1			CODE NO. CL573-0512-3-71		
UNITS mm			1/1		