
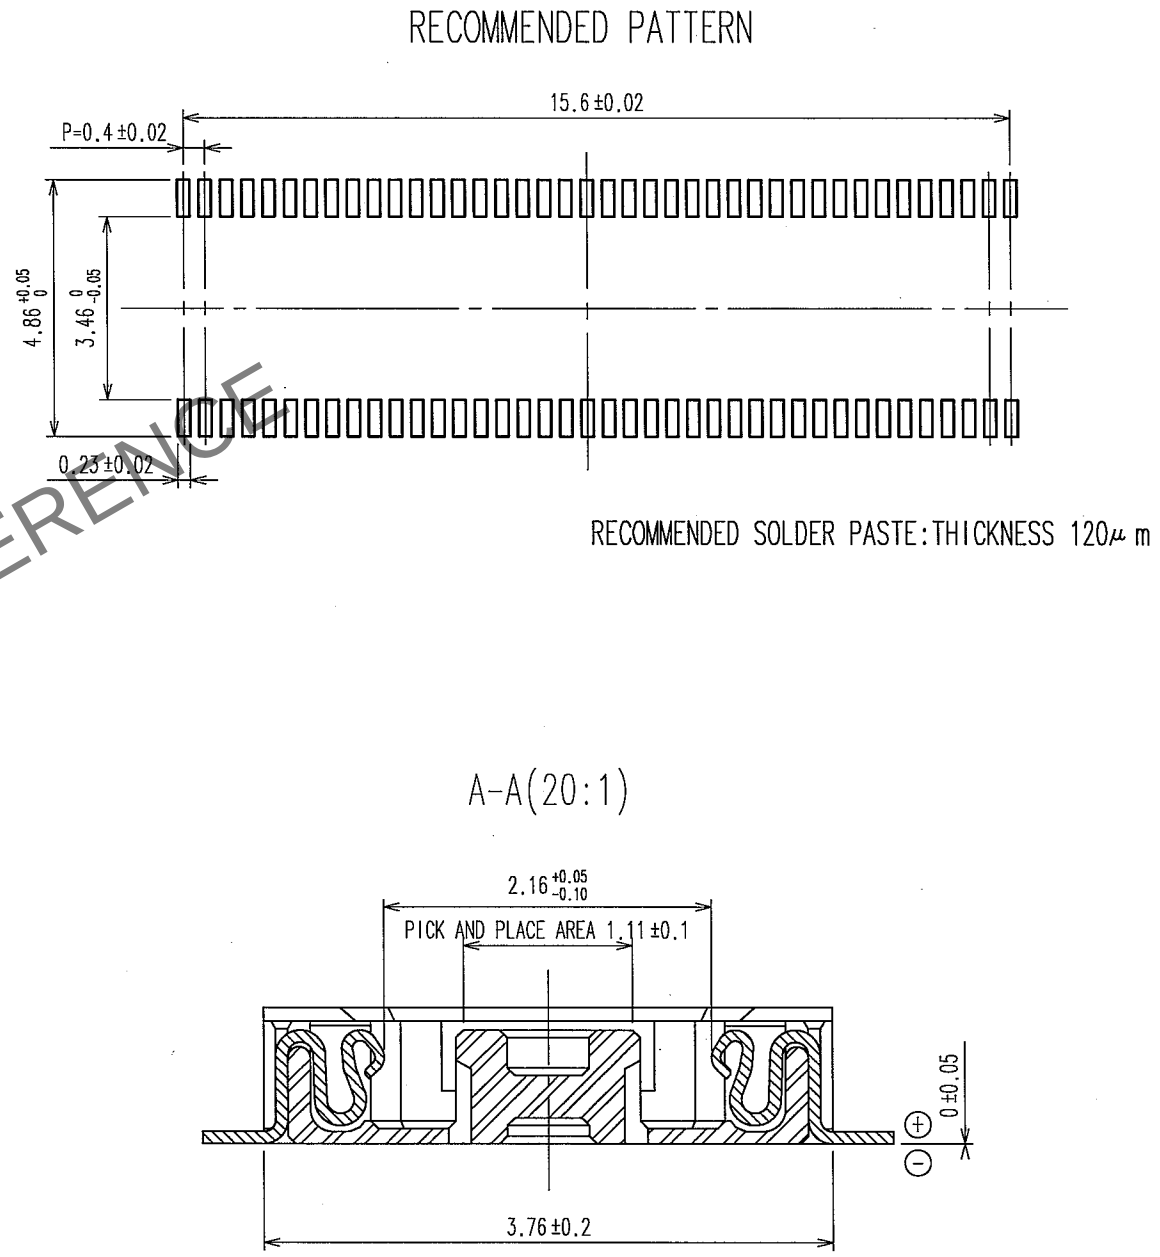
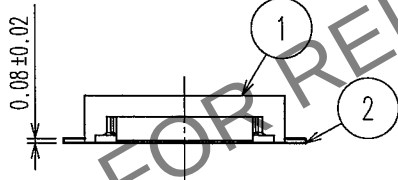
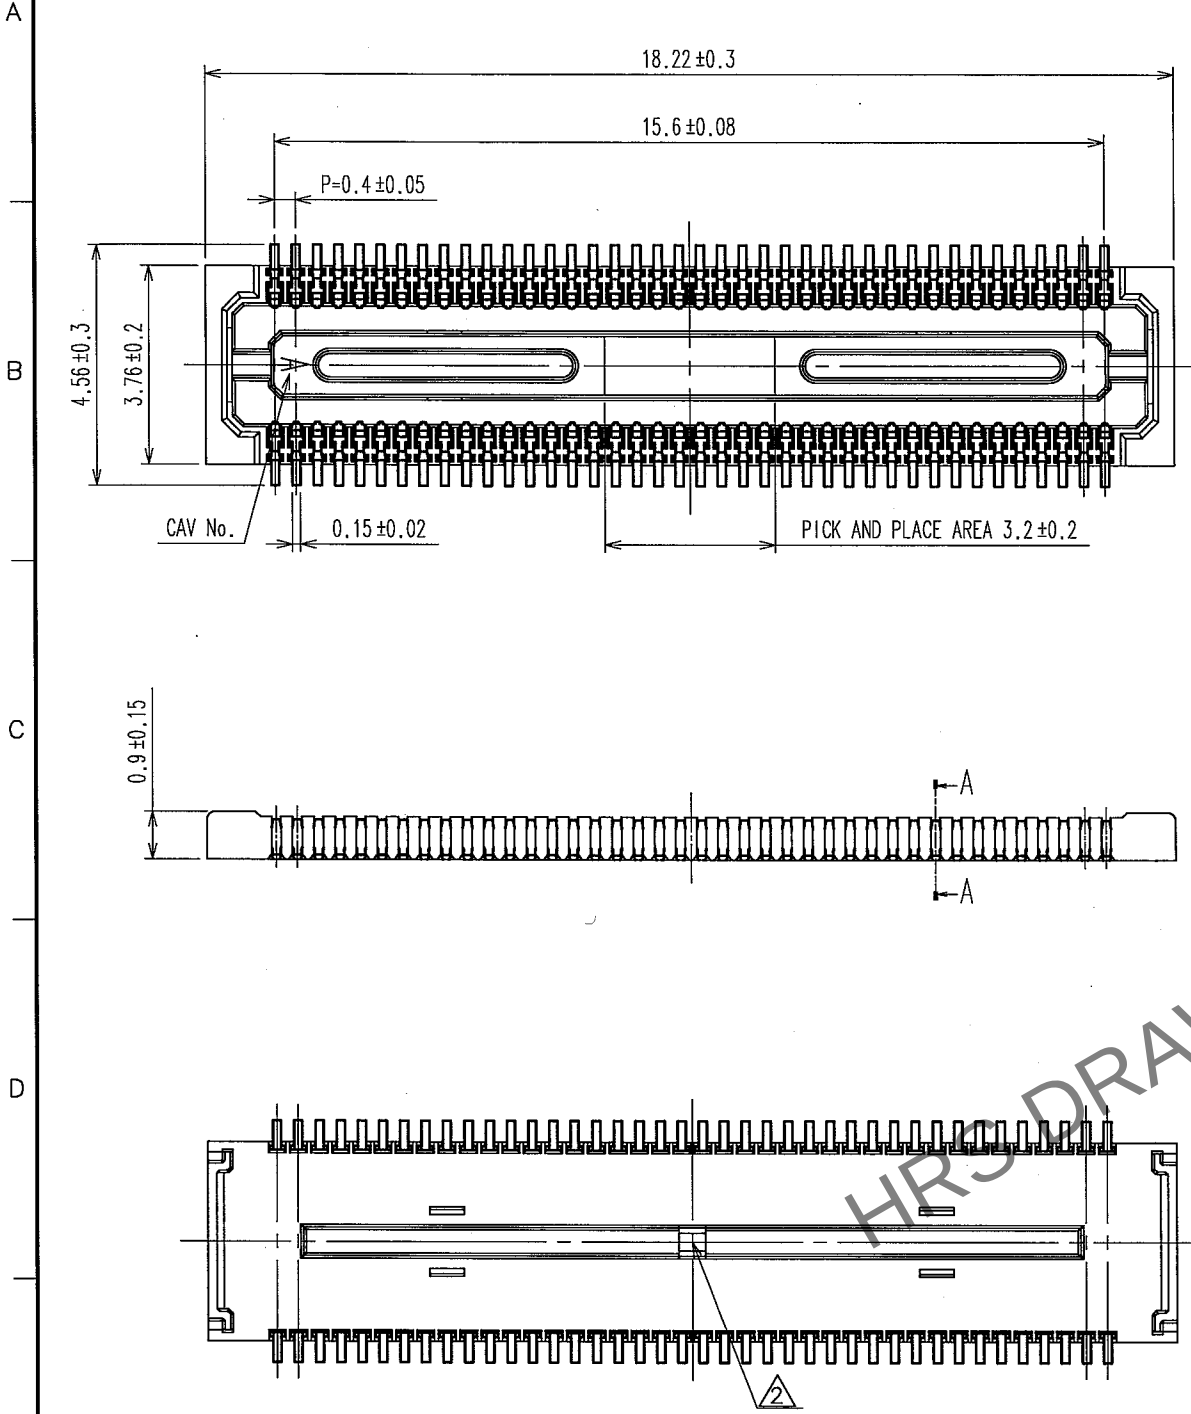


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
3	RE-H-06741	A.T	A.T	05.01.28					
1	DIS-H-001096	A.A	T.M	06.06.29					



NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2. PER REEL : 5000 CONNECTORS.
3. AT THE BEGINNING OF THE REEL, 100 MM AT MIN SHALL BE EMPTY POCKETS.
AT THE END OF THE REEL, 160 MM AT MIN SHALL BE EMPTY POCKETS.
4. CONTACT PLATING SPECIFICATIONS.
CONTACT AREA : GOLD 0.05 μm MIN.
SMT LEAD : GOLD 0.02 μm MIN.
UNDERPLATING : NICKEL 1 μm MIN.
(SURFACE : SEALING)

			△1.5		PS		PLASTIC REEL (BLACK)						
2	PHOSPHOR BRONZE	4	4		POLYESTER		CLEAR(COVER TAPE)						
1	LCP	UL94V-0, BLACK		3		PS		CLEAR(EMBOSSSED CARRIER TAPE)					
NO.		MATERIAL		FINISH, REMARKS		NO.		MATERIAL	FINISH, REMARKS				
CODE NO. (OLD)				DRAWN		DESIGNED		CHECKED		APPROVED		RELEASED	
				T.NISHI		K.MIDORIKAWA		K.IKEDA		T.OMA			
				'04.07.30		'04.07.30		'04.07.30		'04.07.30		. .	
		DRAWING NO.				PART NO.							
SCALE		EDC3-303468-04				DF30FC-80DS-0.4V(81)							
FREE		 HIROSE ELECTRIC CO., LTD				CODE NO.							
UNITS						CL684-1116-3-81							
mm						1/2							

TO




STYLE AND DIMENSION OF REEL (FREE SIZE) $\triangle_1$



SUPPLIER	
QUANTITY	
PART NO.	
CODE NO.	
DATE OF MANUFACTURED	
生産月日	年 月 日
図番	CL684-1116-3-81
品名	DF30FC-80DS-0.4V(81)
納入数量	5000個
納入者	ヒロセ電機(株)

CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		T. NISHI	K. MIDORIKAWA	K. IKEDA	T. OMA	
		'04.07.30	'04.07.30	'04.07.30	'04.07.30	

 SCALE 5 : 1	DRAWING NO.	PART NO.
	EDC3-303468-04	DF30FC-80DS-0.4V(81)
UNITS mm	 HIROSE ELECTRIC CO., LTD	CODE NO. CL684-1116-3-81

2