

目錄 MAPX	设变内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance:30 MΩ Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-55° C to +85° C

Insulator color: Black/White

Plastic material:PBT/LCP

Shell finish:Nickel plated/Tin-Lead plated

Contact finish:









01:Selective Gold Flash

02:Selective Gold 3U"

03:Selective Gold 5U"

04:Selective Gold 15U"

05:Selective Gold 30U"

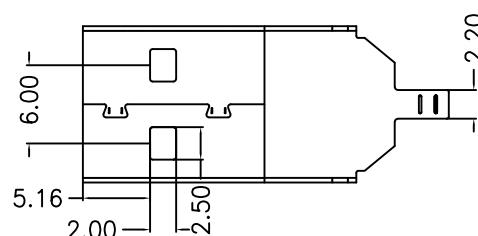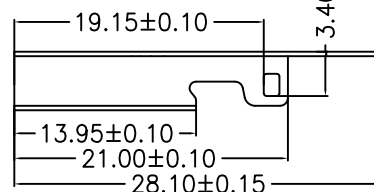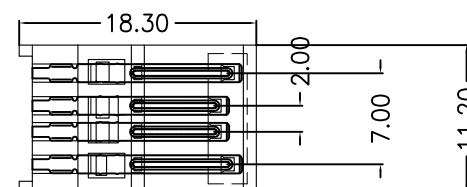

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X	±0.15	X'	±5°
.X	±0.10	.X'	±2°
.XX	±0.05	.XX'	±1°
.XXX	±0.03	.XXX'	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	917-701A1011D10200
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AM三件式铁壳28MM A款白胶1U OD4.0
日期 DATE	2009/10/20	核准 APPD	郭治富	角法 VIEW	
				版本 VER	A0