


Item (Detail view)

2-conductor through terminal block; 2.5 mm²; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®

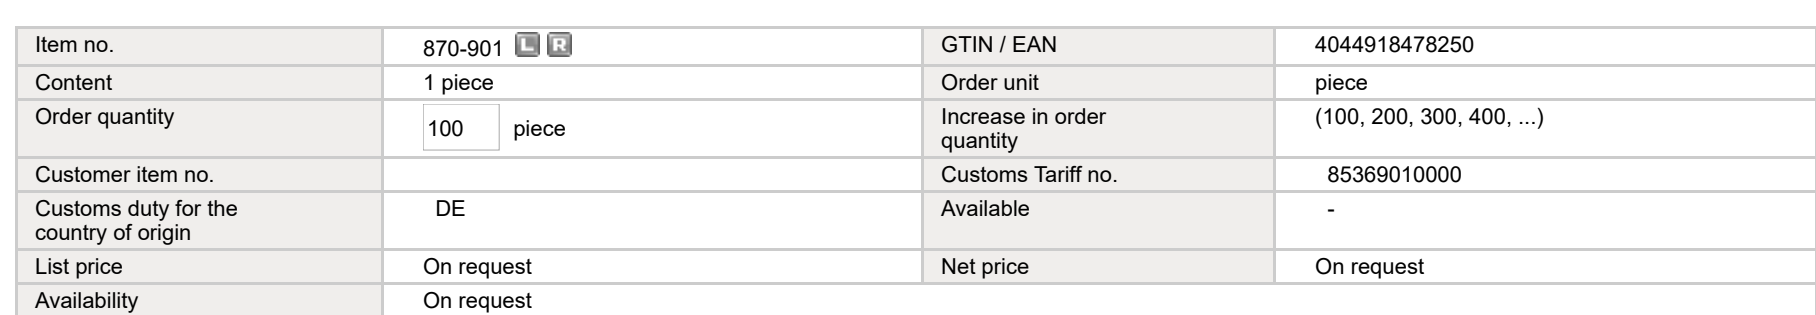

Note: Some items may not be available from your local WAGO company.
Please note that the quantities ordered in the shopping cart are rounded up to the PU (SPU).

RoHS ✓
Compliant



Description	2-conductor through terminal block; 2.5 mm ² ; side and center markings; for DIN-rail 35 x 15 and 35 x 7.5; CAGE CLAMP®
--------------------	--

Description	2-conductor through terminal block, 2.5 mm ² , size and color marking, for DIN rail 35 x 7.5 and 35 x 15, 240V AC/DC
Remarks	

Item properties

	Miscellaneous
--	---------------

Name	Value	Unit
Safety information 1	Max. insulation diameter - 4.4mm	
Connection technology	CAGE CLAMP®	
Actuation type	Operating tool	
Connectable conductor materials	Copper	
Solid conductor	0.06 ... 2.5 mm² / 28 ... 12 AWG	
Fine-stranded conductor	0.06 ... 4 mm² / 28 ... 12 AWG	
Strip length	6 ... 7 mm / 0.24 ... 0.28 inch	
Total number of connection points	2	
Total number of potentialities	1	
Number of levels	1	
Type of wiring	Front-entry wiring	
Wiring	5 mm / 0.197 in	
Height from upper-edge of DIN-35 rail	27.5 mm / 1.083 in	
Depth	44.5 mm / 1.752 in	
Design	horizontal	
Type of mounting	Carrier rail 35 x 15	
Marking level	Side marking	
Color	gray	
Insulating material	Polyamide 66 (PA 66)	
Fire load [MJ]	0.08	MJ
Weight [g]	4.303	g
Packaging type	BOX	
[mm]	5	mm
Main product function	Through term. block	
Product type	Through rail-mount term. blocks	

Upwards