

DTM04-6P-E005

✓ ACTIVE

DEUTSCH | DEUTSCH DT, DEUTSCH DTM

TE Internal #: DTM04-6P-E005

Housing for Male Terminals, Wire-to-Wire, 6 Position, 3.81 mm [.15 in] Centerline, Sealable, Black, Wire & Cable, Power, Hybrid

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DTM Housings



Connector System: **Wire-to-Wire**
Number of Positions: **6**
Connector & Housing Type: **Housing for Male Terminals**
Centerline (Pitch): **3.81 mm [.15 in]**
Sealable: **Yes**

[All DEUTSCH DTM Housings \(113\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Male Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Integrated in Housing

Configuration Features

Blank Cavity Position	0
Connector Modification	End Cap
Number of Positions	6
Number of Rows	2

Electrical Characteristics



Operating Voltage	250 VAC
-------------------	---------

Nominal Voltage Architecture	250 V
------------------------------	-------

Body Features

Cable Exit Angle	180°
------------------	------

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Size	Size 20
--------------	---------

Contact Type	Pin
--------------	-----

Mating Pin Diameter	1 mm[.04 in]
---------------------	--------------

Contact Current Rating (Max)	7.5 A
------------------------------	-------

Mechanical Attachment

Terminal Position Assurance	Yes
-----------------------------	-----

Strain Relief	Without
---------------	---------

Mating Alignment Type	Polarized
-----------------------	-----------

Mating Alignment	With
------------------	------

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Housing Material	Plastic
------------------	---------

Centerline (Pitch)	3.81 mm[.15 in]
--------------------	-----------------

Dimensions

Connector Height	43.7 mm[1.72 in]
------------------	------------------

Product Width	19.2 mm[.756 in]
---------------	------------------

Product Length	23.8 mm[.937 in]
----------------	------------------

Row-to-Row Spacing	7.11 mm[.28 in]
--------------------	-----------------

Compatible Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]
--------------------------------------	-------------------------------

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
-----------------------------	----------------

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Degree of Protection	IP68, IP6K9K
----------------------	--------------



Compatible With Agency/Standards Products	SAE J2030
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	1
Packaging Method	Package

Other

Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability	Not reviewed for solder process capability
---------------------------	--

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>




Compatible Parts

 TE Part # CAT-D48-SP729 DEUTSCH Sealing Plugs	 TE Part # CAT-D485-CH8172 DEUTSCH DTM Housings	 TE Part # CAT-D485-W416 DEUTSCH DTM Wedgelocks	 TE Part # CAT-D487-M8649 DEUTSCH DT Mounting Clips
 TE Part # CAT-D48-ST273 DEUTSCH Solid Contacts	 TE Part # 1924487-2 MOUNTING CLIP, AMPSEAL 16	 TE Part # DT-RT1 EXT TOOL, FRONT RELEASE	 TE Part # 1060-20-0144 PIN, SF, SIZE 20, 16-22, AU/SN
 TE Part # 1011-086-0605 SEAL RET, 6P, BLK, DTM	 TE Part # 1060-20-0622 PIN, SF, SIZE 20, 14-16, NI/NI	 TE Part # 1060-20-0222 PIN, SF, SIZE 20, 16-22, NI/NI	 TE Part # 1060-20-0122 PIN, SF, SIZE 20, 16-22, NI/NI
 TE Part # 1060-20-0244 PIN, SF, SIZE 20, 16-22, AU/SN	 TE Part # 1060-20-0177 PIN, SF, SIZE 20, 16-22, SN/SN	 TE Part # 1060-20-0277 PIN, SF, SIZE 20, 16-22, SN/SN	 TE Part # CAT-D48-SFT273 DEUTSCH Stamped and Formed Contacts

Also in the Series | **DEUTSCH DT**



Automotive Connector Caps & Covers (19)

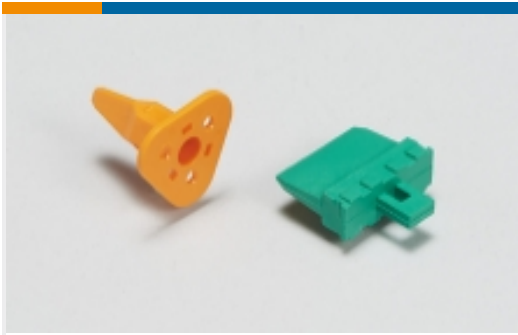

Automotive Connector Locks & Position Assurance (87)



Automotive Housings (705)



Connector Backshells (61)



Connector Seals & Cavity Plugs (6)



Connector Strain Relief (28)



Insertion & Extraction Tools (3)



Other Automotive Connector Accessories (28)




PCB Headers & Receptacles (106)

Also in the Series | **DEUTSCH DTM**



Automotive Connector Caps & Covers (7)

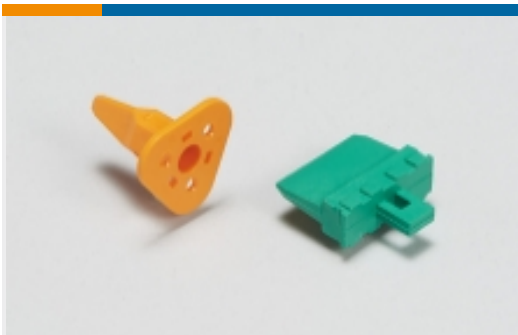

Automotive Connector Locks & Position Assurance (25)



Automotive Housings (104)




Connector Backshells (7)



Connector Strain Relief (28)



Insertion & Extraction Tools (2)

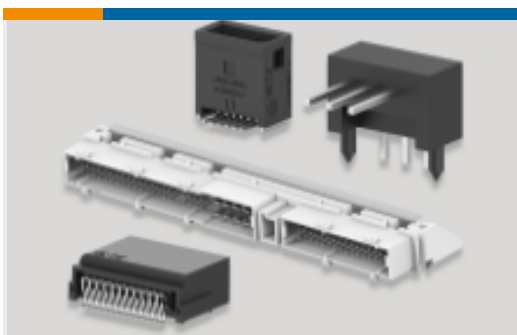

PCB Headers & Receptacles (38)



Customers Also Bought

TE Part #DRB16-48SAE-L018
PLG, 48P, BLK, E, CAP, A

TE Part #DTM06-6S-E005
PLG, 6P, BLK, N, CAP

TE Part #WM-6P
WEDGE LOCK, 6P, REC, ORG, DTM

TE Part #DTM1312PC12PBR008
HDR, 24P, BLK, RA EEC, NI/CU, CB

TE Part #DRCP28-86SC
PLG, 86P, BLK, 12/20, C

TE Part #DTCE02-1-4P-E003
DTCE RECP ASM

TE Part #1747731-3
0.64/1.0 SEALED 49POS PLUG ASSY, A KEY

TE Part #185448-3
2.5MM SEALED PIN HSG 4P

TE Part #3T3972-24-20P
REC, 20P, AL, N, 16, P

TE Part #AEC14-40PC
REC, 40P, BLK, N, C

Documents

Product Drawings
REC, 6P, BLK, N, CAP
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_DTM04-6P-E005_99_c-dtm04-6p-e005-99.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_DTM04-6P-E005_99_c-dtm04-6p-e005-99.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_DTM04-6P-E005_99_c-dtm04-6p-e005-99.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English