
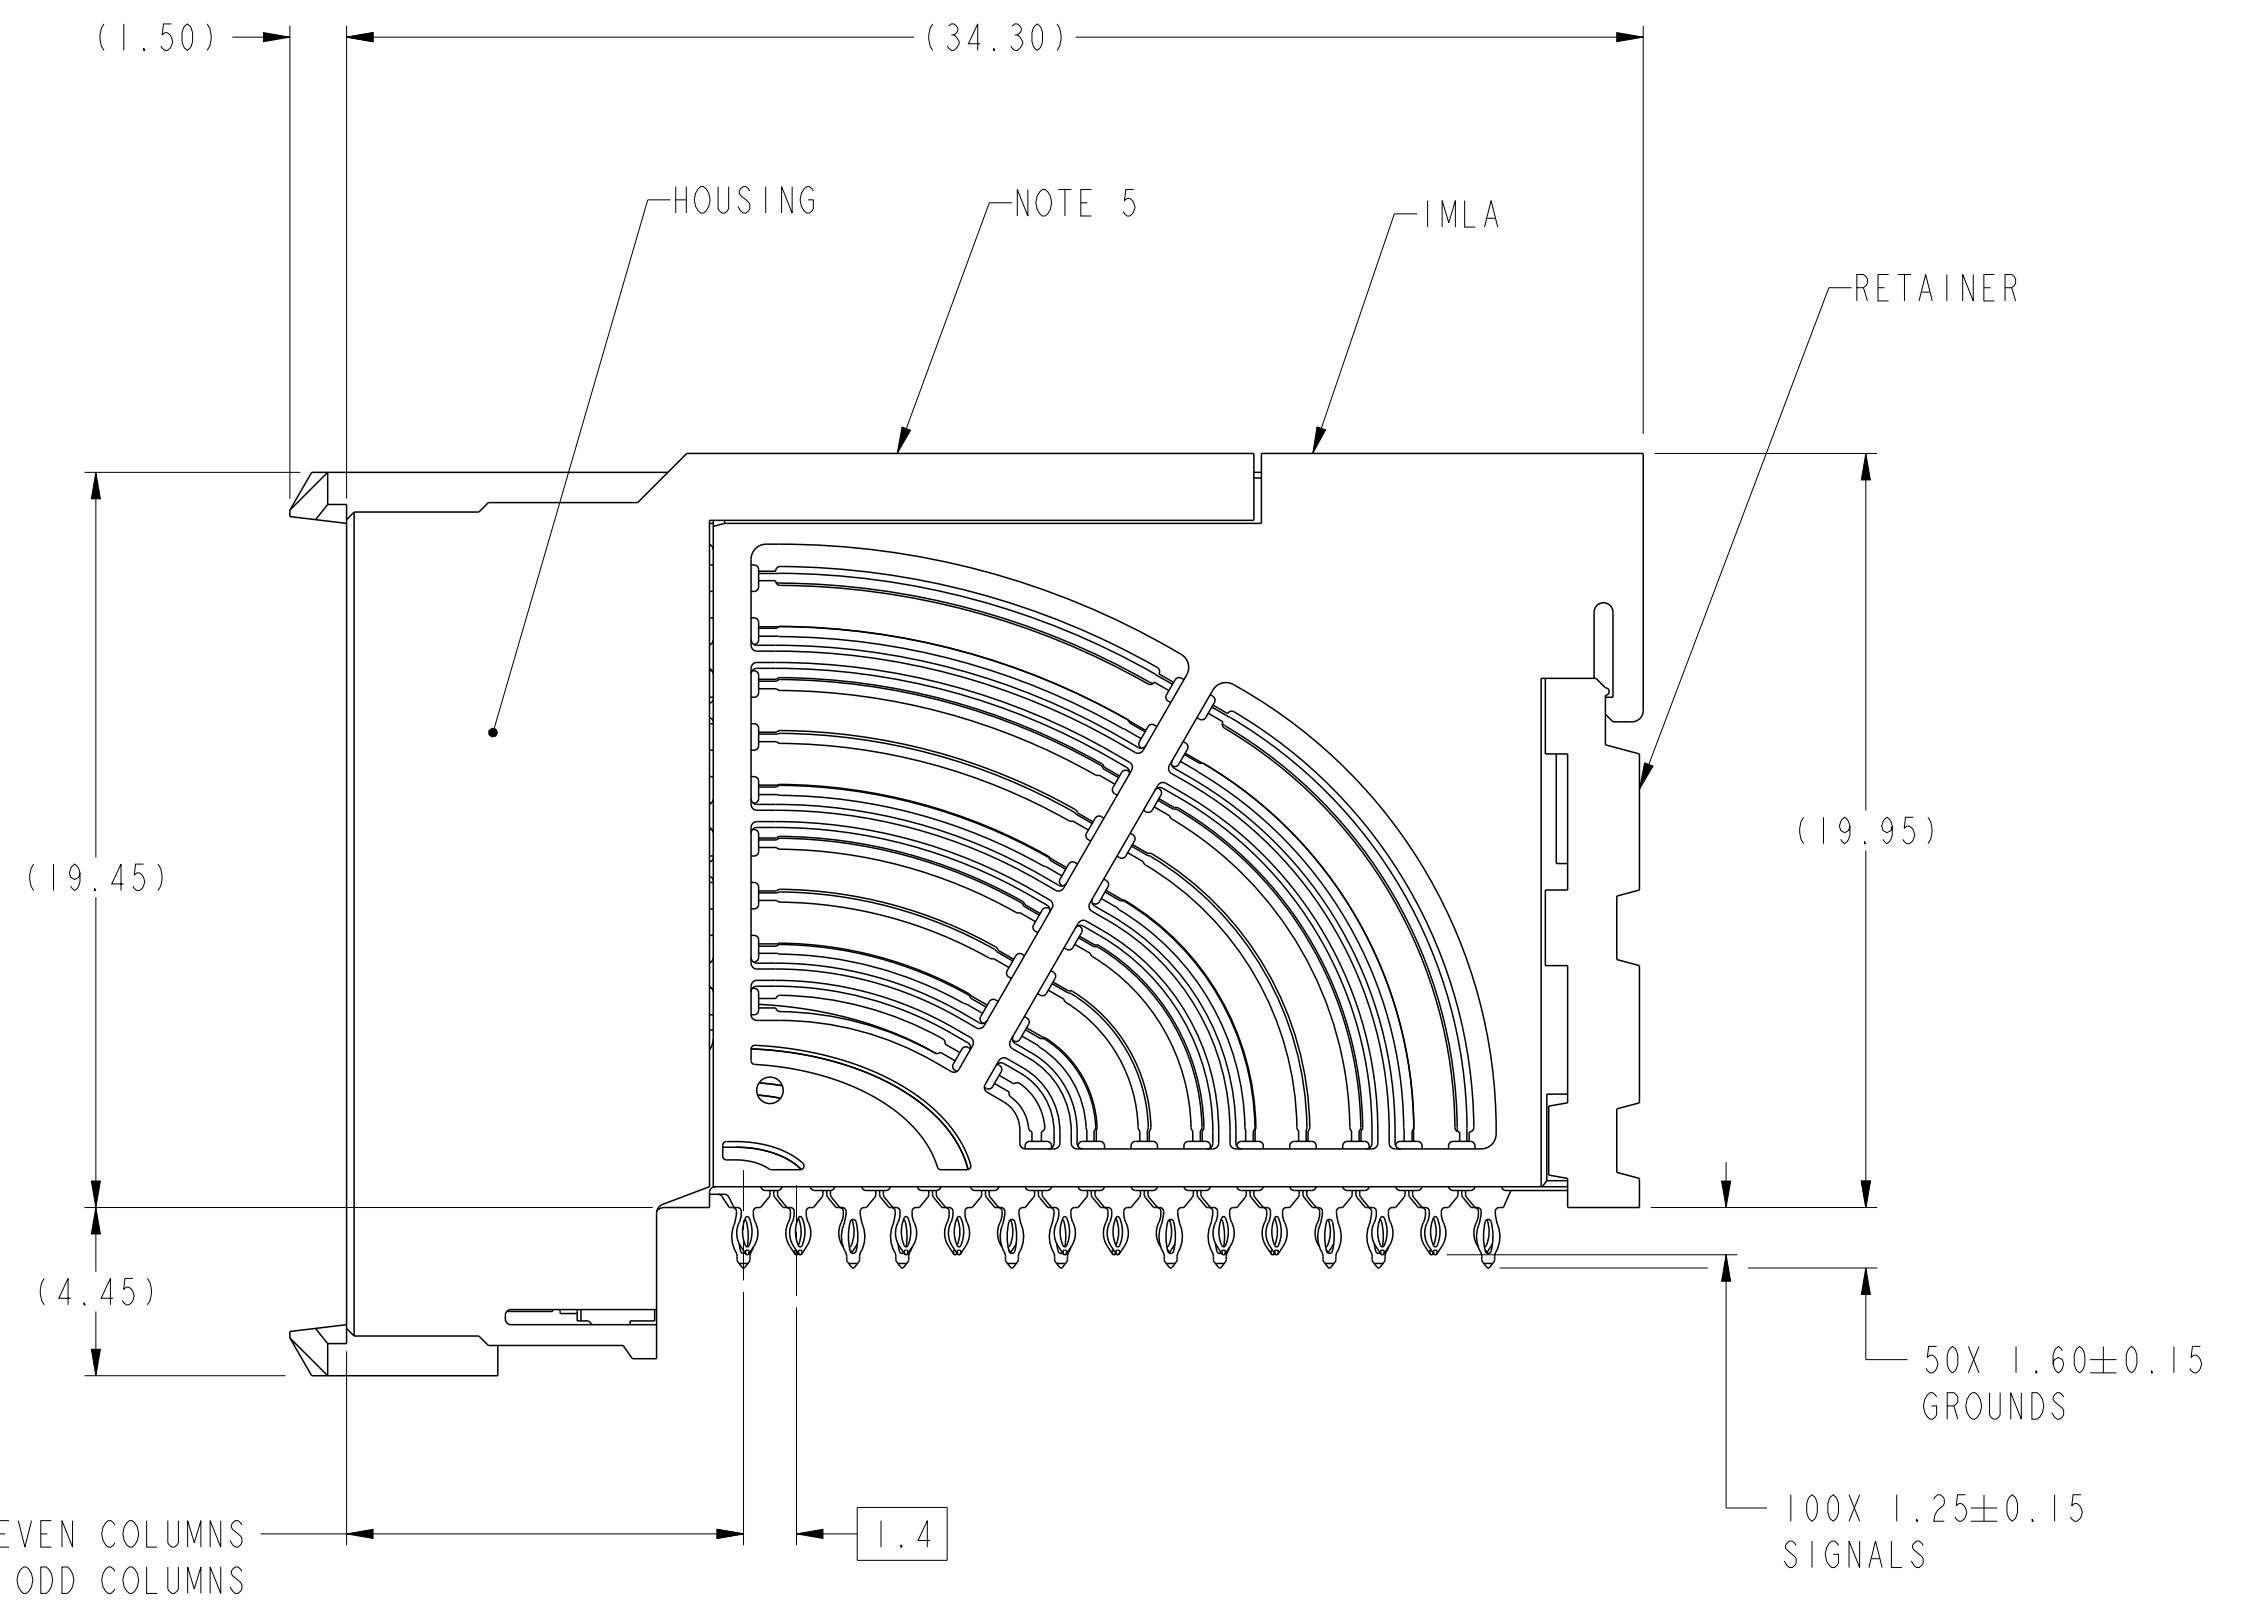


Amphenol
FCi

© 2016 AFCI

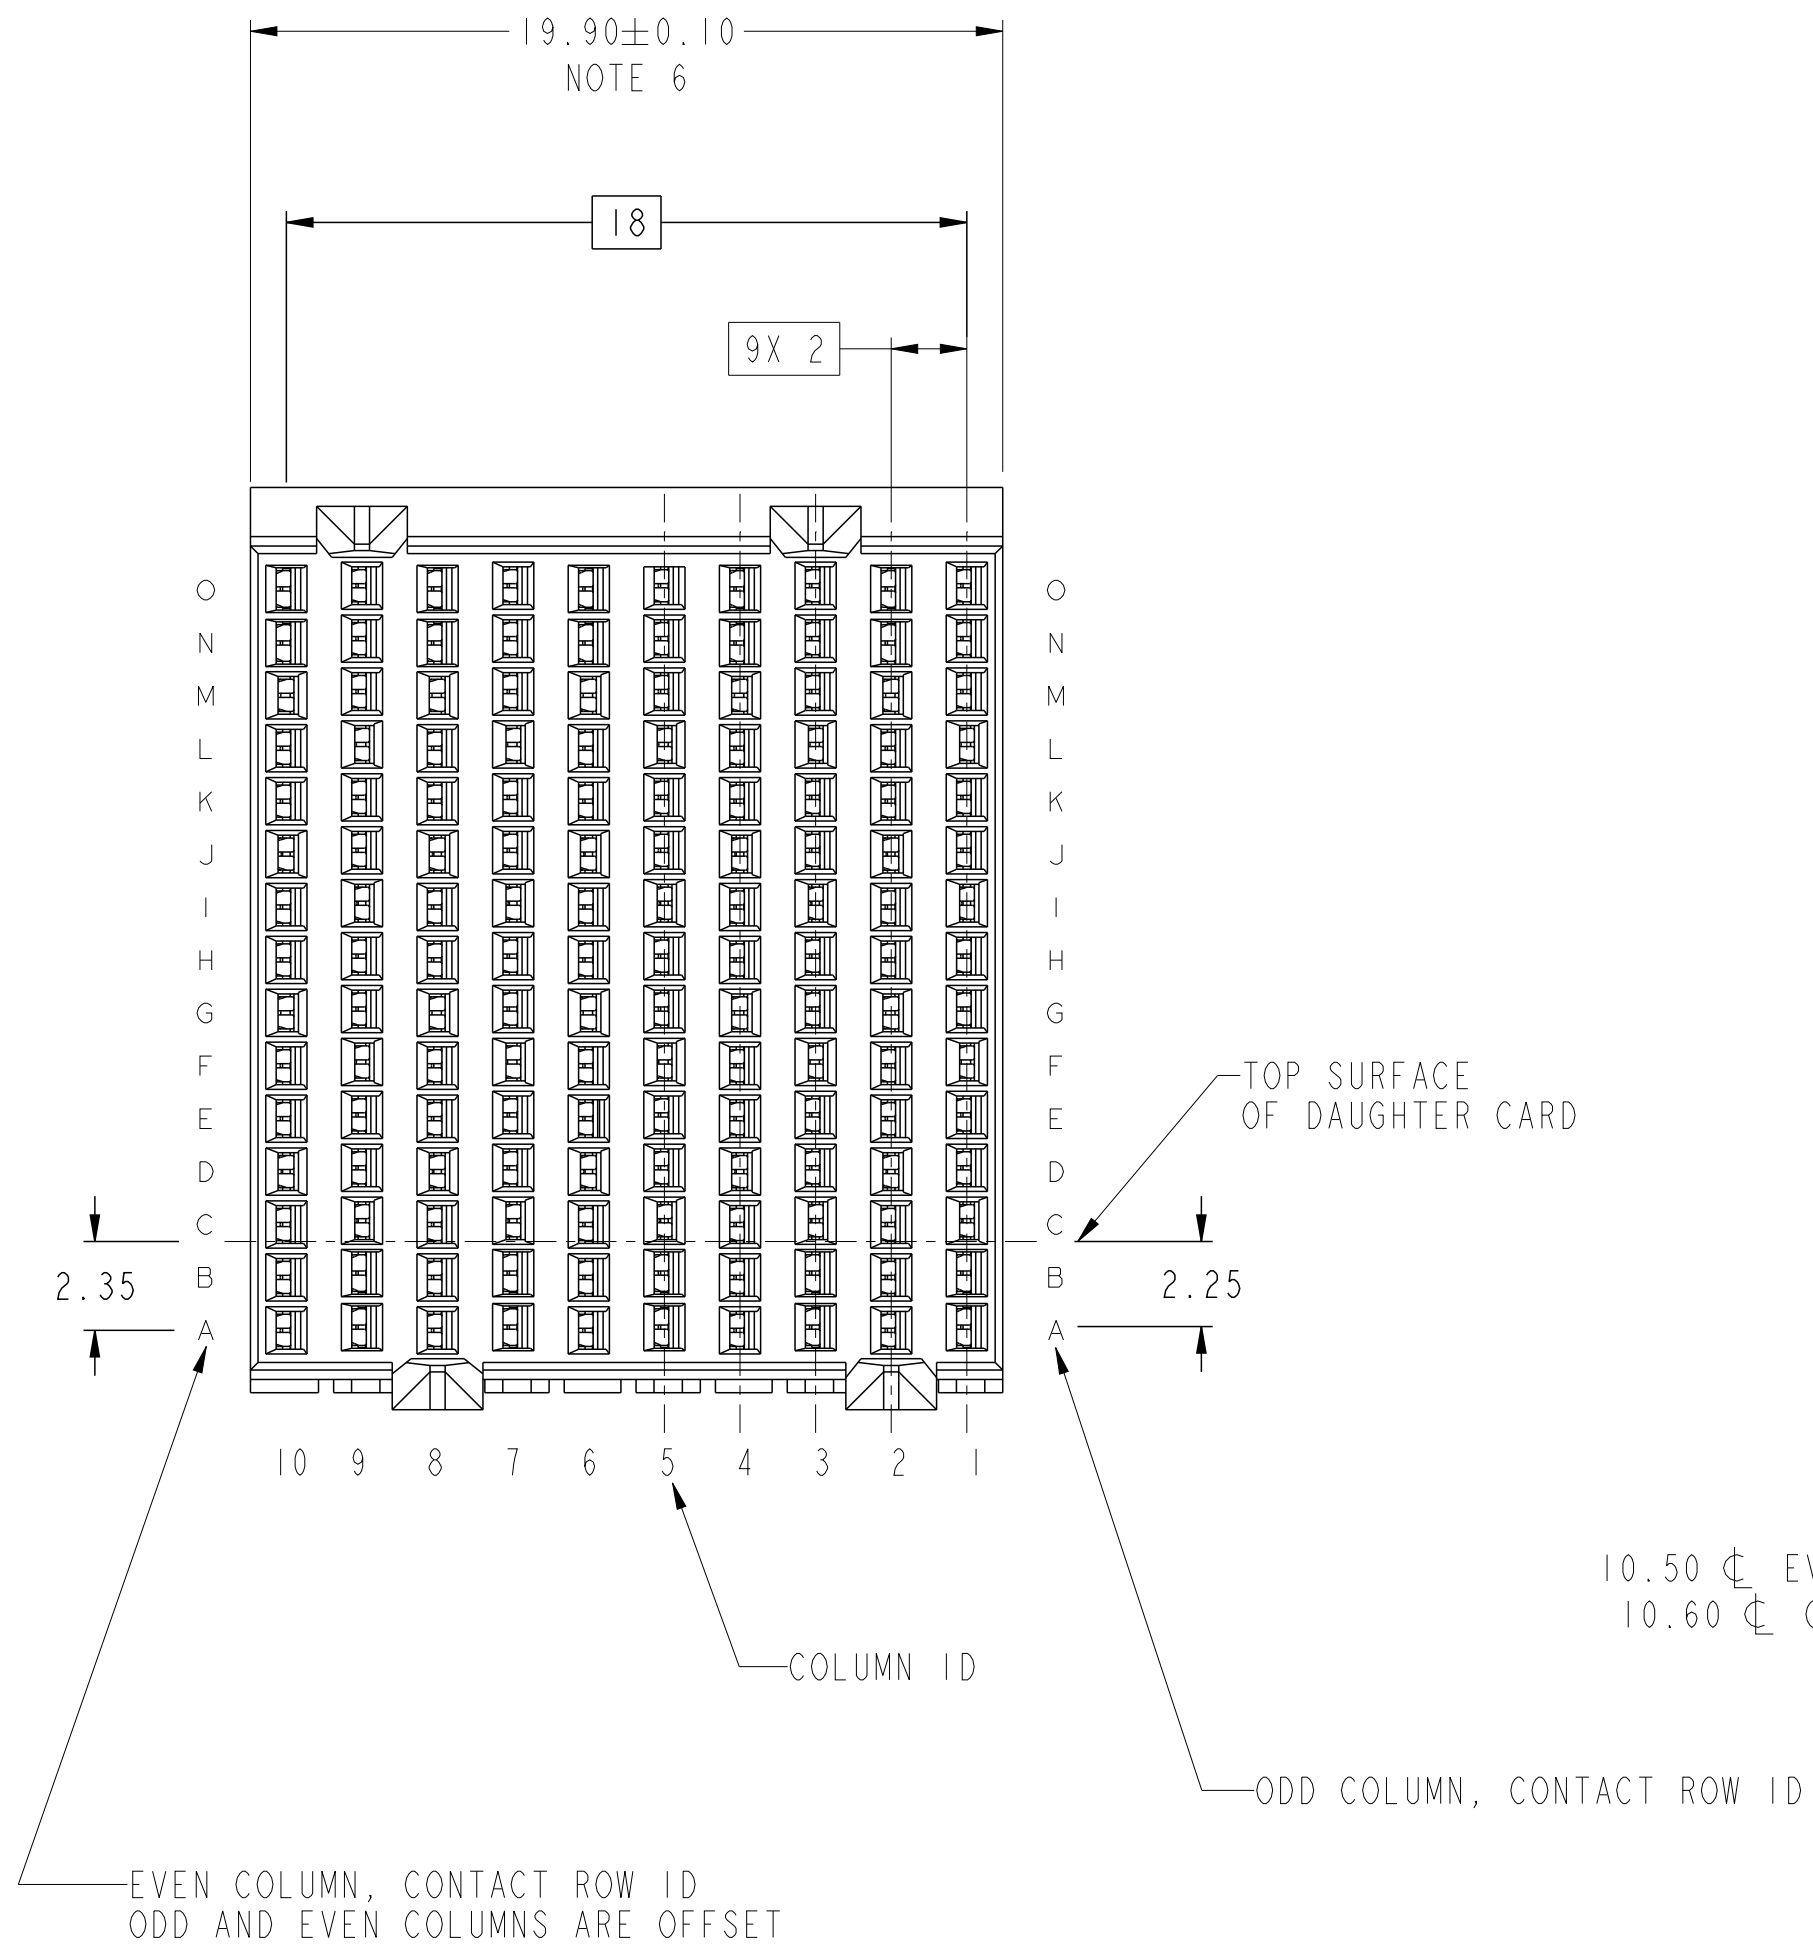


spec ref		---		dr		D.Johnescu		2012/04/18		projection		MM		size		A2		scale		1:1	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Tao Zhan		2016/03/01						ecn no		ELX-DG-22284-1					
ASME Y14.5M				chr		Heaven Cen		2016/03/02						rel level		Released					
				appr		Pei-Ming Zheng		2016/03/08		product family		AirMax VSE									
surface - 		linear		0.X		±.3		Amphenol FCI		title		AIRMAX VSE R.A. RECEPTACLE		dwg no		10115913		rev		C	
				0.XX		±.10															
				0.XXX		±.050															
		angular		±°						cat. no.		-		Product- Customer Drw		sheet 1 of 3					

PDS: Rev :C

STATUS: Released



Printed: Mar 08, 2016

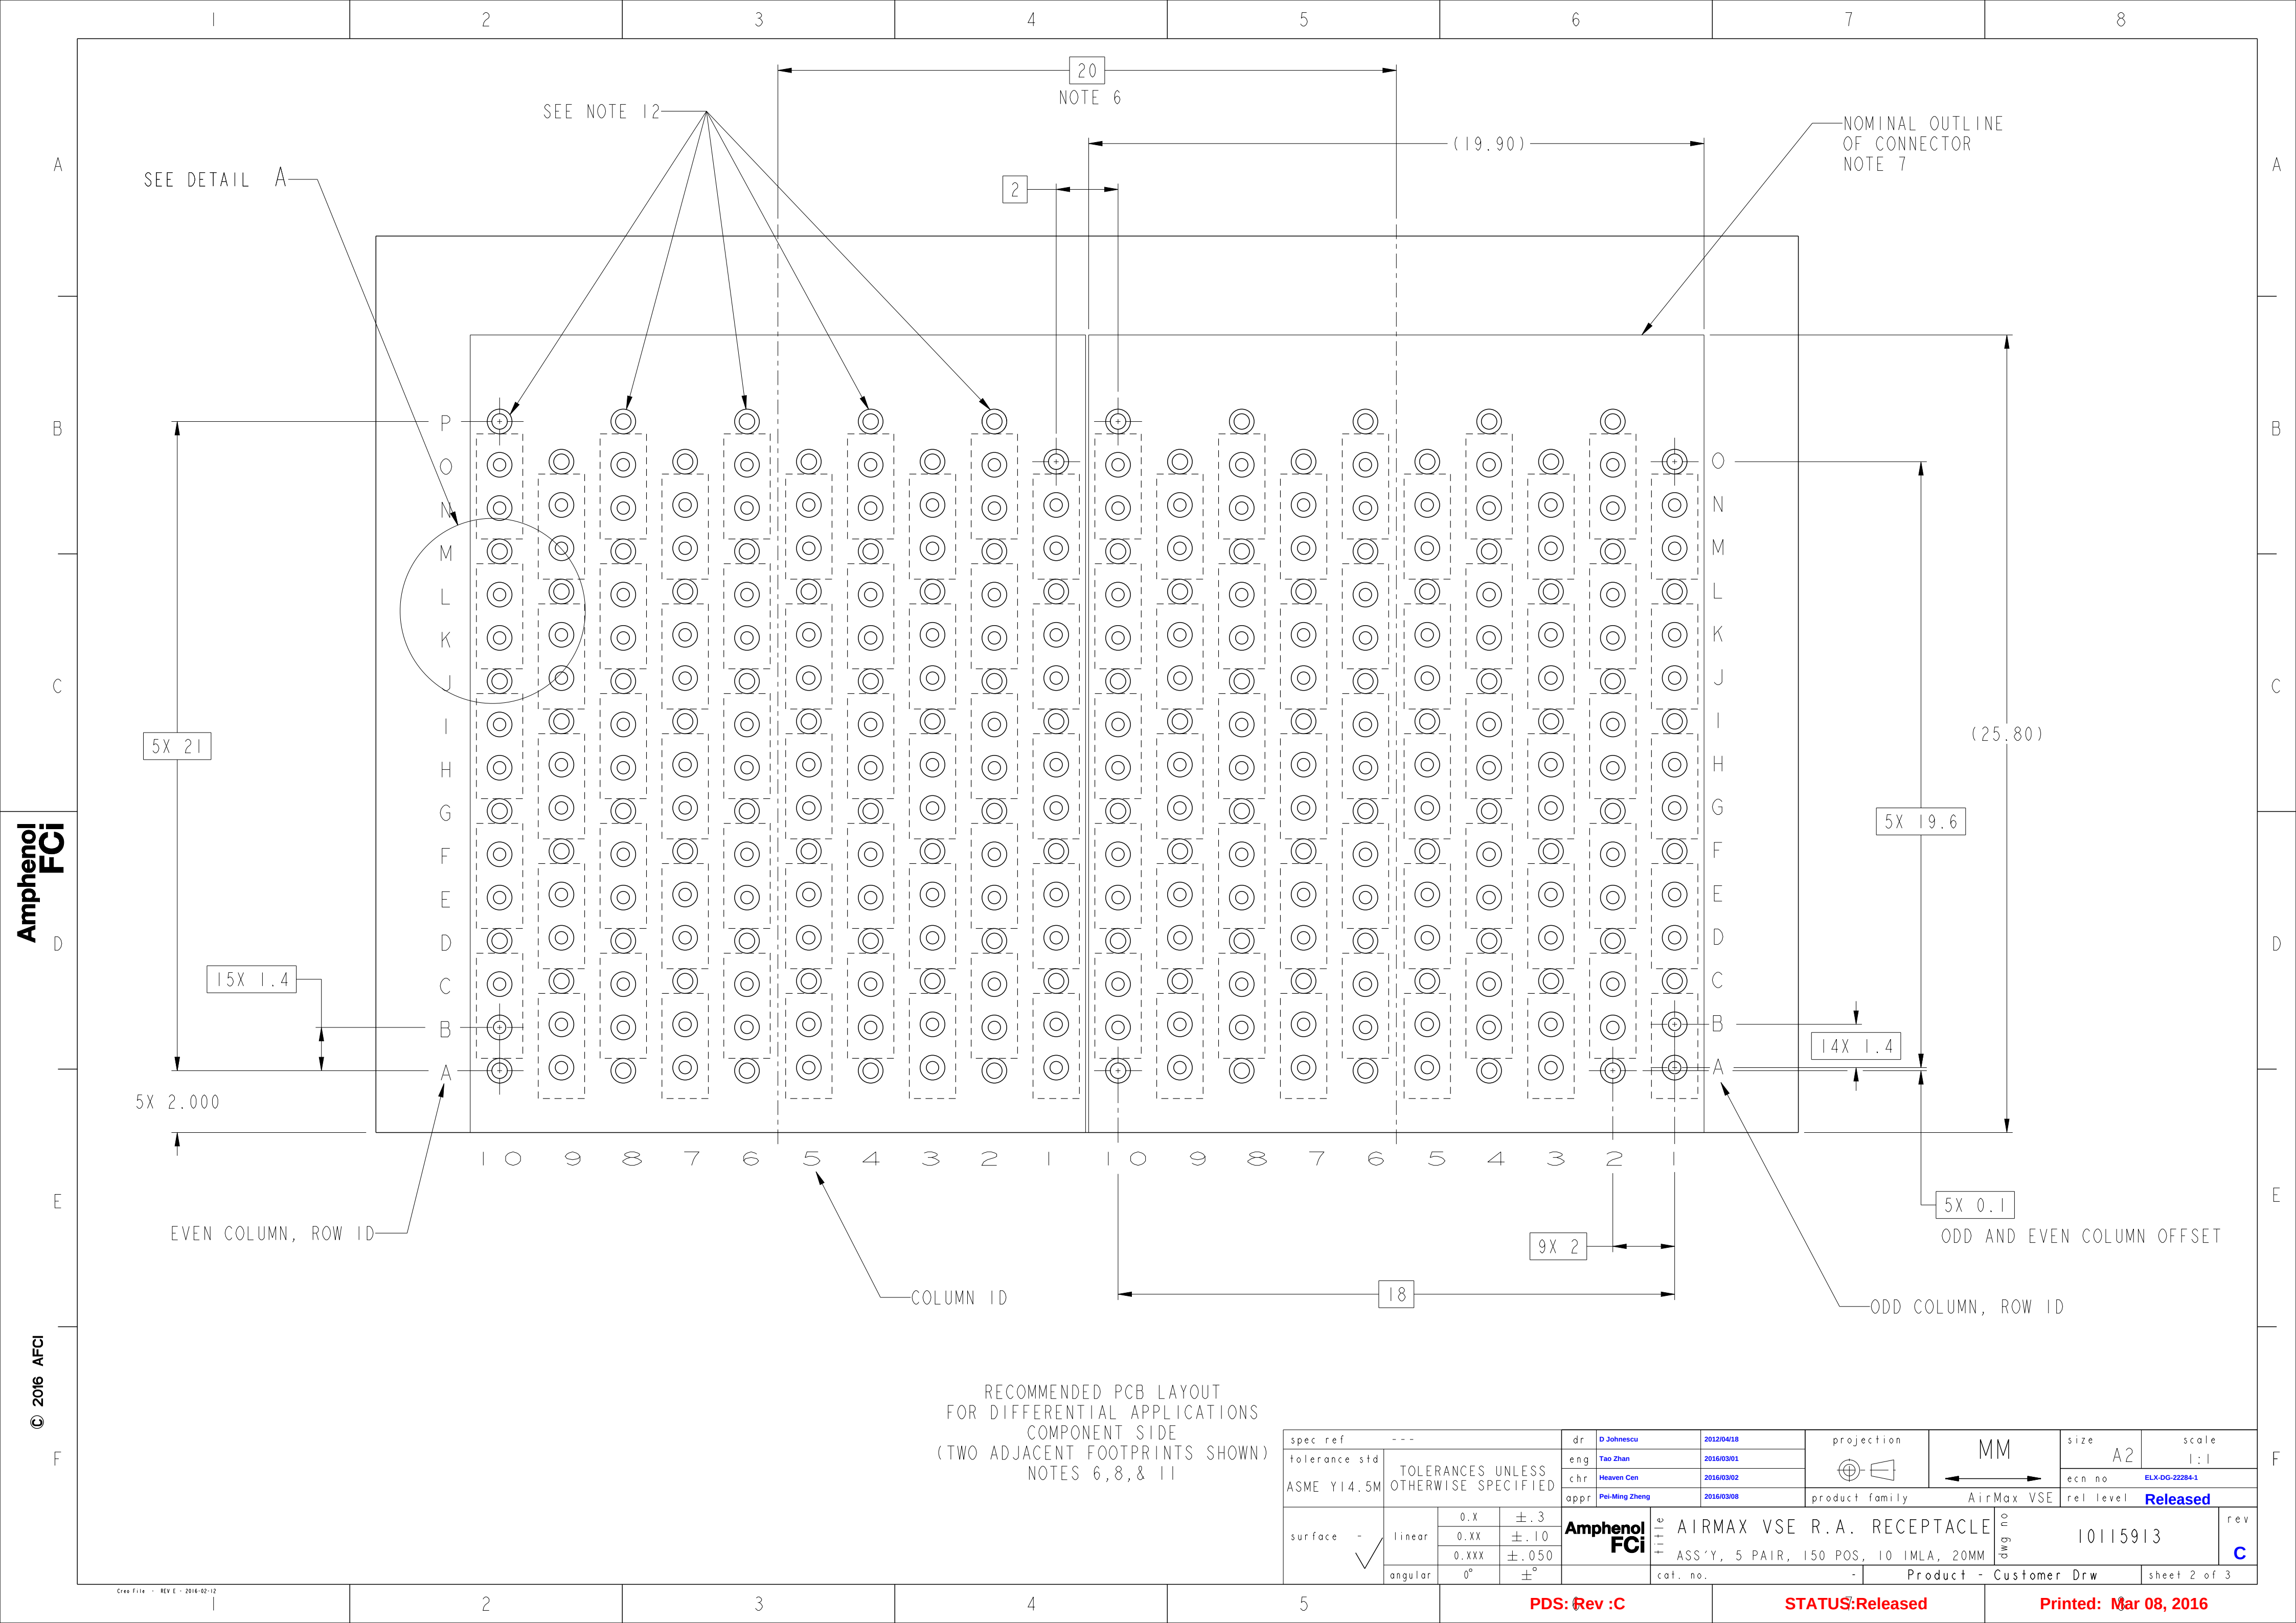

Amphenol
FCi

© 2016 APCI

RECOMMENDED PCB LAYOUT
FOR DIFFERENTIAL APPLICATIONS
COMPONENT SIDE
(TWO ADJACENT FOOTPRINTS SHOWN)
NOTES 6, 8, & 11

spec ref		---		dr		D Johnescu		2012/04/18		projection				size		A2		scale		1:1					
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Tao Zhan		2016/03/01						ecn no		ELX-DG-22284-1									
ASME Y14.5M				chr		Heaven Cen		2016/03/02						rel level		Released									
surface - 		linear		0.X ±.3		0.XX ±.10		0.XXX ±.050		angular 0° ±°		Amphenol FCI		title		AIRMAX VSE R.A. RECEPTACLE		dwg no		10115913		rev		C	



PDS: Rev :C

STATUS:Released

Printed: Mar 08, 2016

PRODUCT NUMBER	PRESS-FIT TAIL PLATING TYPE
10115913-101LF	TIN OVER NICKEL (LEAD FREE)

- 1 - CONNECTOR MATERIALS:
HOUSING: HIGH TEMP THERMOPLASTIC, NATURAL, UL94-V0
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
CONTACT: COPPER ALLOY
ORGANIZER: HIGH TEMP THERMOPLASTIC, WHITE, UL94-V0
- 2 - CONTACT PLATING:
SEPARABLE INTERFACE:
PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE
REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-0956
INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995)
CENTRAL OFFICE TEST SEQUENCE
- PRESS-FIT TAILS: SEE TABLE
- 3 - PRODUCT SPECIFICATION: GS-12-0956
- 4 - APPLICATION SPECIFICATION: GS-20-0305.
- 5 - PRODUCT MARKING, (PROTOTYPE, PART NUMBER & LOT CODE), ON THIS SURFACE.
- 6 - THE MINIMUM CENTERLINE SPACING BETWEEN ADJACENT
MODULES IS 20.0 MM.
- 7 - CONNECTOR OUTLINE MAY BE SCREEN PRINTED ONTO CUSTOMER PCB TO
BE USED AS A GUIDE FOR MANUAL CONNECTOR PLACEMENT.
- 8 - REFER TO CUSTOMER DRAWING 10104444 FOR INFORMATION
ON PCB HOLE DIAMETERS AND PLATING OPTIONS
- 9 - LEAD FREE PRODUCT MEETS THE EUROPEAN UNION DIRECTIVES &
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 10 - PACKAGING MEETS GS-14-920 LEAD FREE LABELING
SPECIFICATION.
- 11 - GROUND CONTACTS (C,F,I,L AND O IN ODD COLUMNS AND A,D,G,J AND M,
EVEN COLUMNS) REQUIRE (Ø0.500) FINISHED HOLES. SIGNAL LOCATIONS
REQUIRE (Ø0.400) FINISHED HOLES.
- 12 - THESE OUTER VIAS (P) ARE OPTIONAL. WHILE NO CONNECTOR EONS ARE.
PRESSED INTO THESE HOLES, WE RECOMMEND (Ø 0.500) FINISHED HOLES
AT THESE LOCATIONS TO PROVIDE GROUND SYMMETRY THROUGH THE PCB

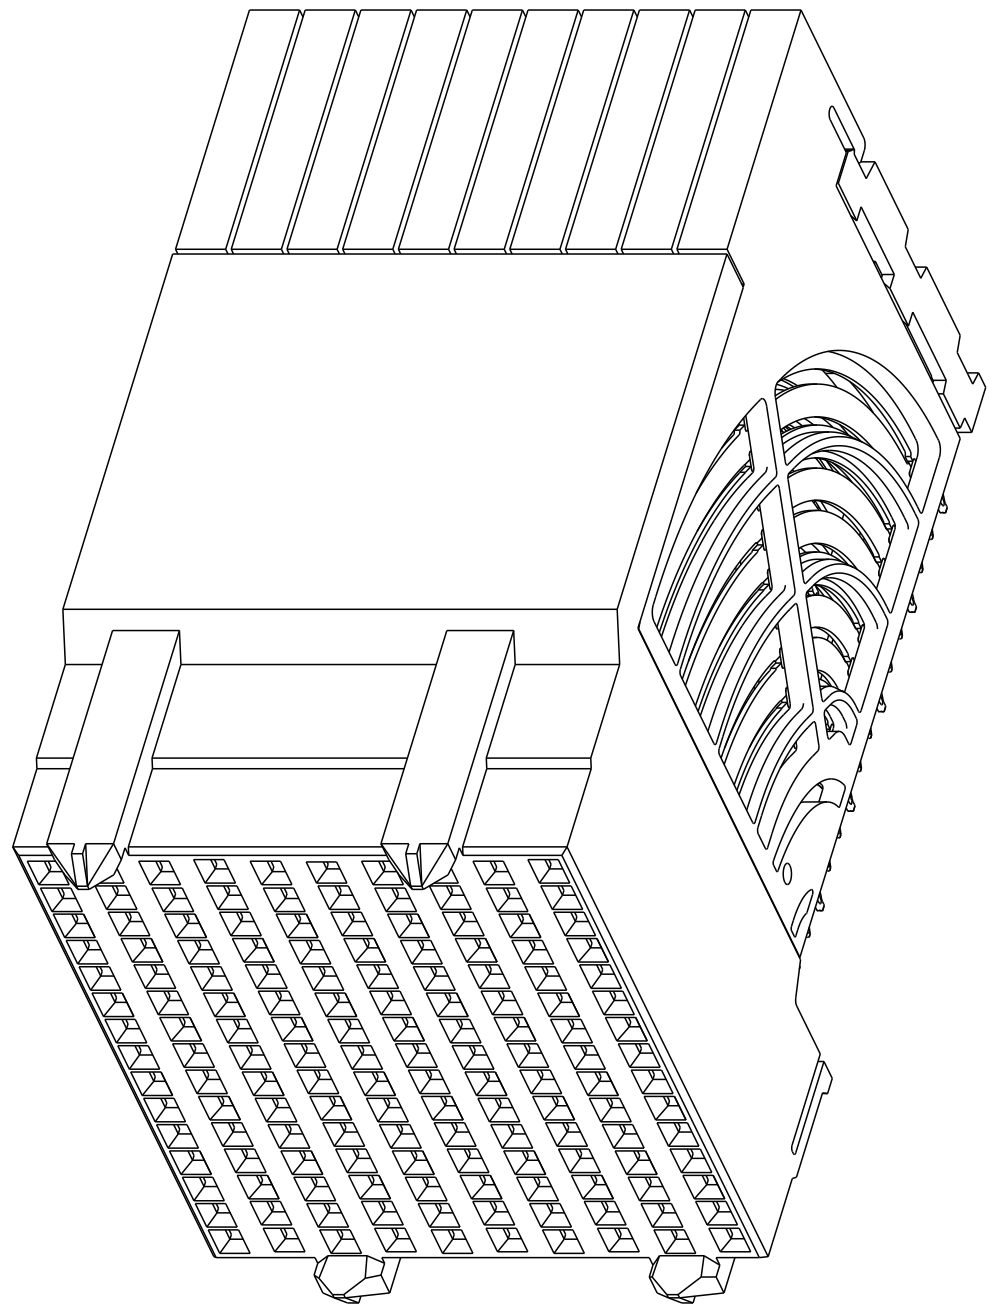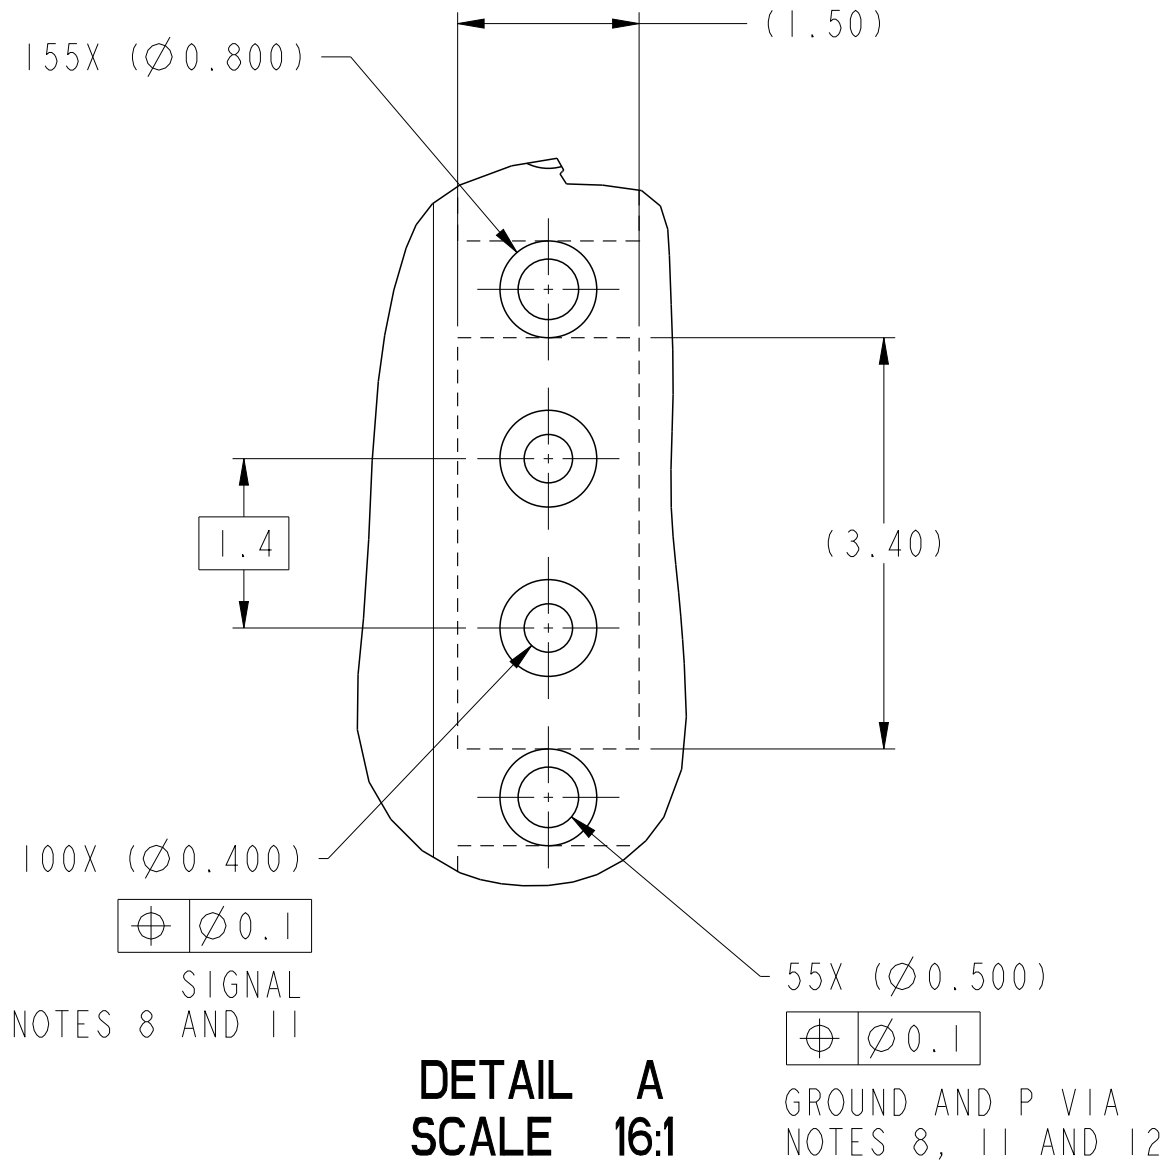

10115913-101LF
SCALE 4:1

spec ref	---	dr	D Johnescu	2012/04/18	projection	MM	size	A2	scale	4:1
tolerance std	ASME Y14.5M	eng	Tao Zhan	2016/03/01	chr	Heaven Cen	ecn no	ELX-DG-22284-1	rel level	Released
surface	linear	0.X	±.3	0.XX	±.10	0.XXX	±.050	angular	0°	±°
Amphenol FCi	title	AIRMAX VSE R.A. RECEPTACLE	ASS'Y, 5 PAIR, 150 POS, 10 IMLA, 20MM	cat. no.	Product - Customer Drw	sheet 3 of 3	rev	C		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[10115913-101LF](#)