


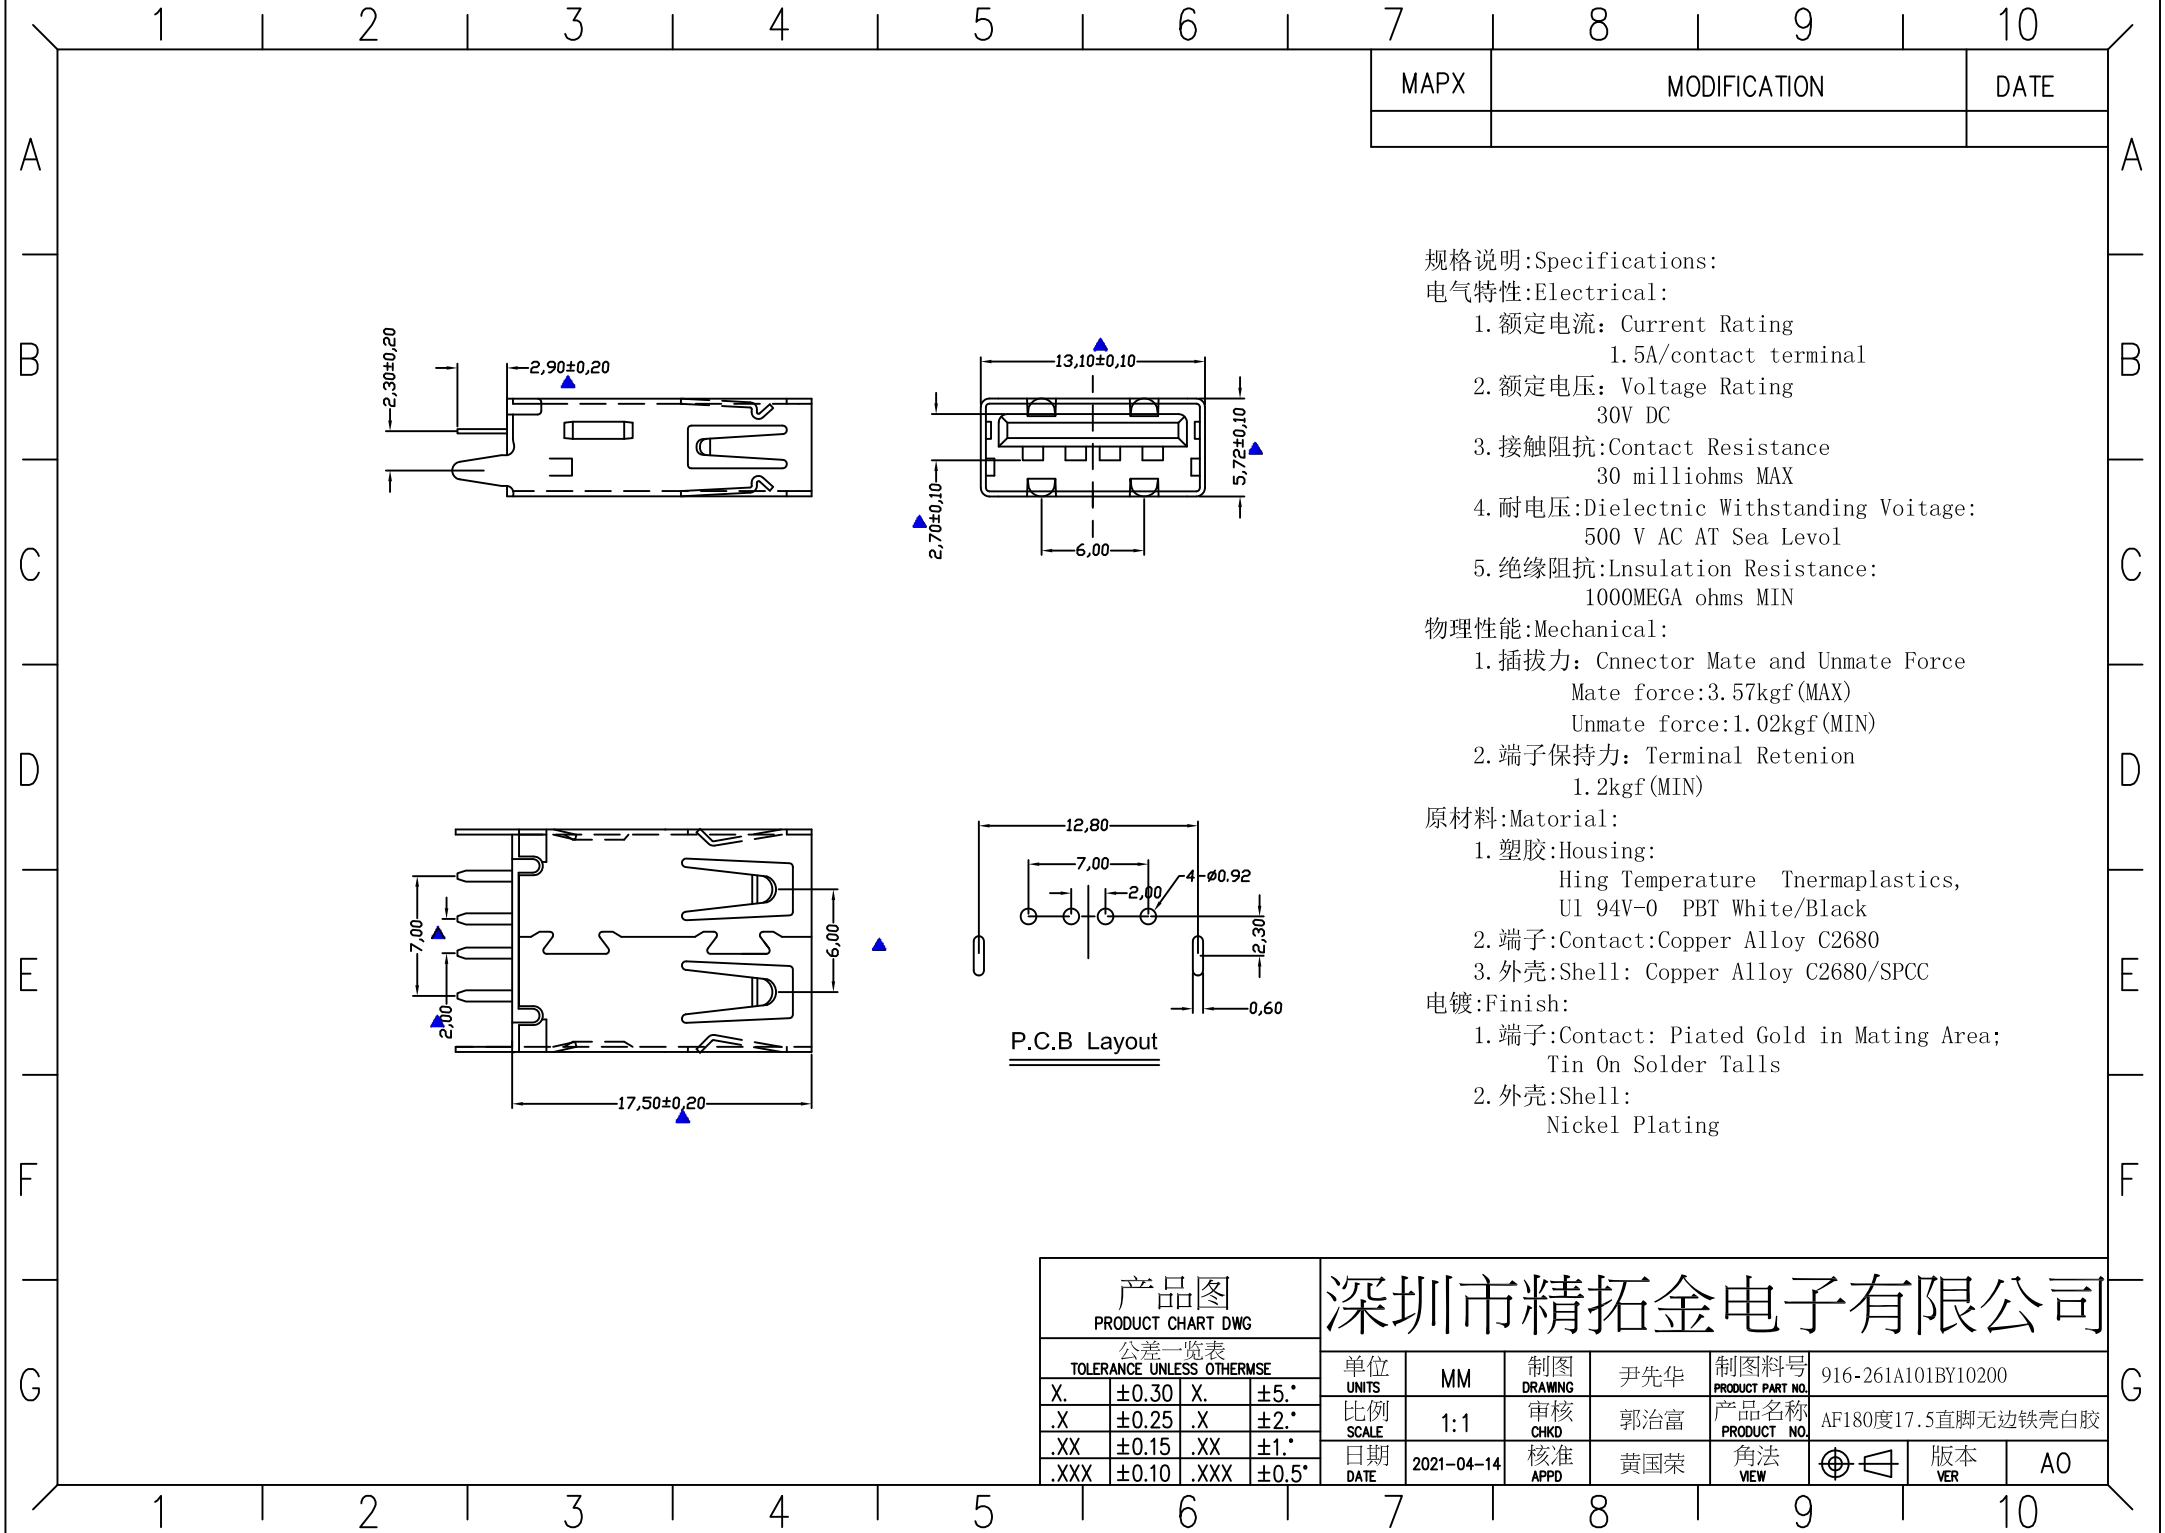

MAPX	MODIFICATION	DATE

- 规格说明:Specifications:
- 电气特性:Electrical:
- 1. 额定电流: Current Rating
1.5A/contact terminal
 - 2. 额定电压: Voltage Rating
30V DC
 - 3. 接触阻抗:Contact Resistance
30 milliohms MAX
 - 4. 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Levol
 - 5. 绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN
- 物理性能:Mechanical:
- 1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
 - 2. 端子保持力: Terminal Retenion
1.2kgf (MIN)
- 原材料:Matorial:
- 1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
U1 94V-0 PBT White/Black
 - 2. 端子:Contact:Copper Alloy C2680
 - 3. 外壳:Shell: Copper Alloy C2680/SPCC
- 电镀:Finish:
- 1. 端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls
 - 2. 外壳:Shell:
Nickel Plating

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	916-261A101BY10200
X.	±0.30	X.	±5.°	比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF180度17.5直脚无边铁壳白胶
.X	±0.25	.X	±2.°	日期 DATE	2021-04-14	核准 APPD	黄国荣	角法 VIEW	
.XX	±0.15	.XX	±1.°					版本 VER	A0
.XXX	±0.10	.XXX	±0.5°						