




Terminals & Splices > Ring Terminals

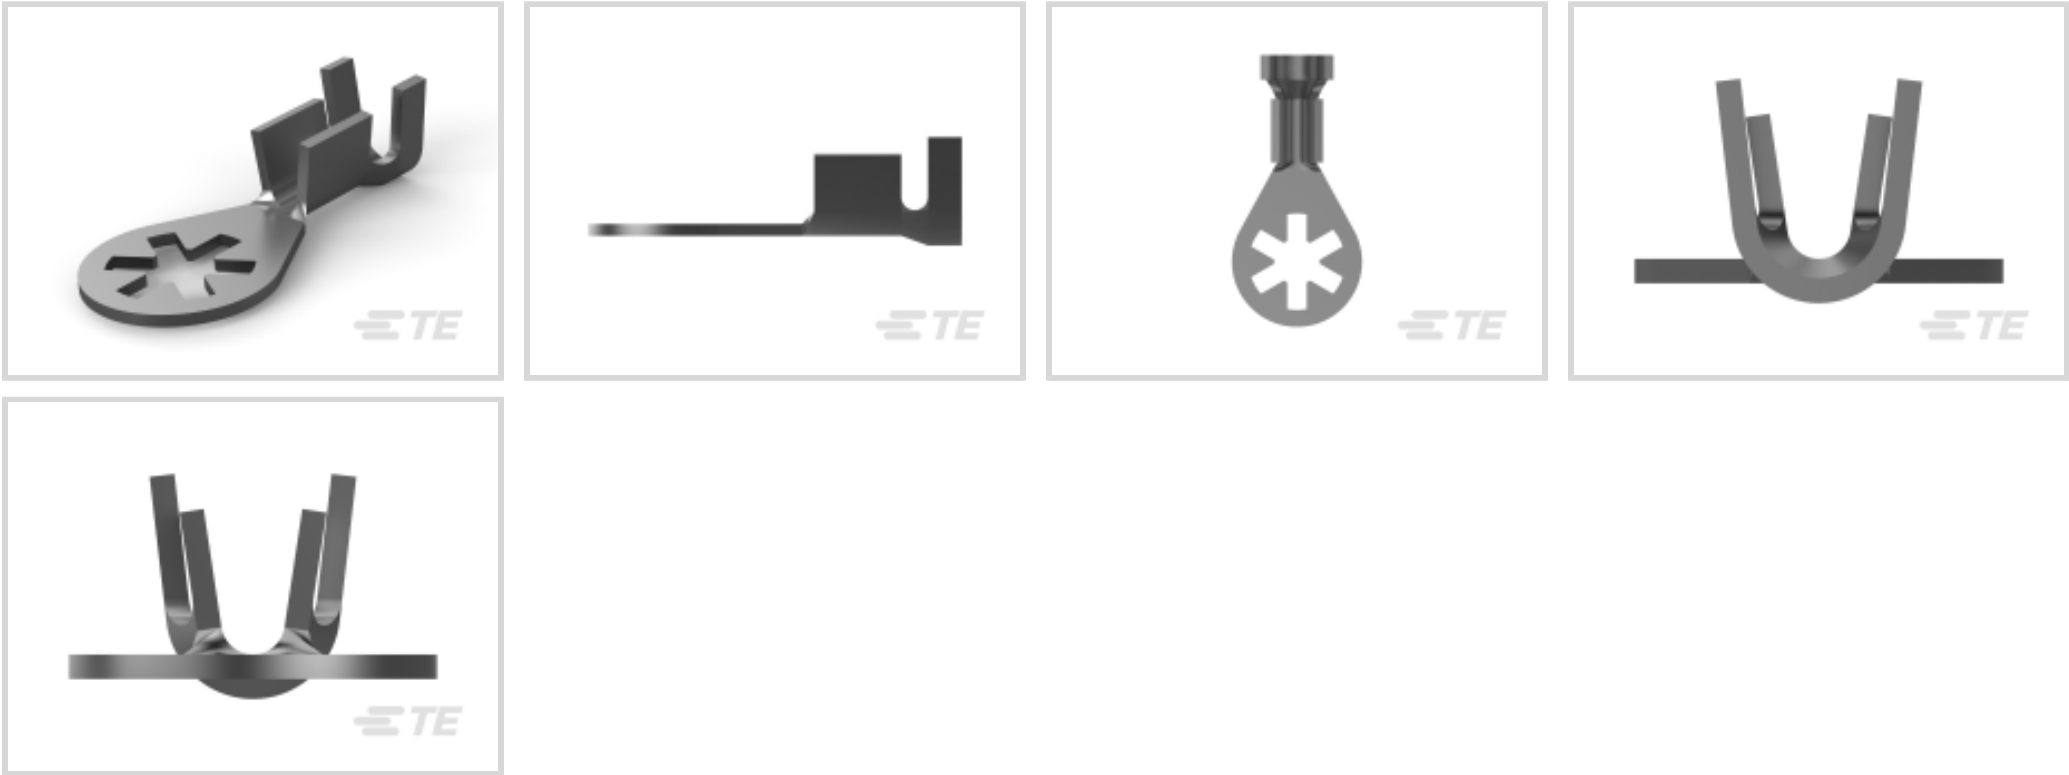

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 1624 – 4106 CMA

Stud Size: #5, M3

Features

Product Type Features

Shape Description	Anti-Rotational/Grounding
Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	#5, M3
Sealable	No
Compatible With Discrete Wire Type	Stranded
Wire Insulation Support Retention Type	Insulation Support

Contact Features

Contact Base Material	Steel
Barrel Type	Open
Terminal Orientation	Straight
Terminal Plating Material	Tin
Contact Underplating Material	Nickel

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

	.105 in
--	---------



Wire Size	1624 – 4106 CMA
Stud Diameter	3.3 mm[.13 in]
Tongue Thickness	.76 mm[.03 in]
Product Length	19.56 mm[.77 in]
Barrel Inside Diameter	1.62 mm, 3.17 mm[.064 in][.125 in]
Compatible Insulation Diameter (Max)	3.68 mm[.145 in]
Compatible Insulation Diameter Range	2.67 – 3.68 mm[.105 – .145 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Operation/Application

Compatible With Wire Base Material	Copper
------------------------------------	--------

Industry Standards

Government Qualified Terminal	No
-------------------------------	----

Packaging Features

Packaging Quantity	9000
Packaging Method	Strip/Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 2150008-1
OCEAN_2.0_Applicator-E-130F180F-REM

KIT
REPRESENTATION ONLY
TE Part # 7-2150008-7
OCEAN_2.0_SPARE_PART_KIT-130F180F

TE Part # 2150008-2
OCEAN_2.0_Applicator-E-130F180F-REA

Customers Also Bought

TE Part #DT04-3P-CE02
REC, 3P, BLK, E

TE Part #1060-16-0622
PIN, SF, SIZE 16, 16-20, NI/SN

TE Part #58433-3
PRO CR ASSY, RBY IS9252

TE Part #180941
FF 250 REC HSG 3P NYLON NAT

TE Part #1-180908-0
FF 250 TAB HSG 2P NYLON NAT

TE Part #2-520183-2
ULTRA-FAST 250 ASY REC 22-18 TPBR

TE Part #2-520128-2
ULTRA-FAST 250 ASY REC 22-18 AWG TPBR

TE Part #61794-1
RING 18-14 AWG TPST

TE Part #63486-1
MAG-MATE 110 FAST TAB 020 TPBR

TE Part #2301994-9
RJ45 JACK INT.MAG. 10/100 LED 1X1



Documents

Product Drawings

RING 18-14 AWG TPCRSTL

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_63640-1_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_63640-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_63640-1_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English