

# PSR-M-EM4-SINCOS1-SC - Extension module



1105011

<https://www.phoenixcontact.com/us/products/1105011>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safe extension module for monitoring zero-speed, speed, direction of rotation, monitoring of 2 axes, NPN/PNP proximity switch, 1 x sin/cos encoder, TBUS interface, up to SIL 3, Cat. 4/PL e, pluggable screw terminal block, TBUS connector included

## Product description

The configurable and individually scalable PSRmodular safety system is a flexible safety solution for monitoring your machine or system. The safe extension module is used to monitor downtimes, speed, and direction of rotation. The module is suitable for connection of NPN/PNP proximity switches and sine/cosine encoders.

## Your advantages

- Cost-effective safety solution with a high level of adaptability to individual requirements
- Fast startup, thanks to easy hardware and software configuration
- Machine downtimes minimized with comprehensive, easy-to-understand diagnostics
- Narrow housing width of just 22.6 mm
- Up to Cat. 4/PL e in accordance with EN ISO 13849-1, SIL 3 in accordance with EN IEC 62061, SIL 3 in accordance with IEC 61508
- Suitable for elevator applications in accordance with EN 81-20

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1105011       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | DN02          |
| Product key                          | DNA363        |
| GTIN                                 | 4055626973319 |
| Weight per piece (including packing) | 191.6 g       |
| Weight per piece (excluding packing) | 195.7 g       |
| Customs tariff number                | 85371098      |
| Country of origin                    | IT            |

# PSR-M-EM4-SINCOS1-SC - Extension module



1105011

<https://www.phoenixcontact.com/us/products/1105011>

## Technical data

### Notes

|                     |                         |
|---------------------|-------------------------|
| Note on application | Only for industrial use |
|---------------------|-------------------------|

### Product properties

|              |                                      |
|--------------|--------------------------------------|
| Product type | Safety device                        |
| Application  | Over-speed safety relay              |
|              | Zero-speed safety relay              |
|              | Monitoring the direction of rotation |

### Data management status

|                  |    |
|------------------|----|
| Article revision | 01 |
|------------------|----|

### Insulation characteristics

|                  |     |
|------------------|-----|
| Protection class | III |
|------------------|-----|

### Times

|               |                       |
|---------------|-----------------------|
| Response time | see user manual       |
| Restart time  | min. 5 s (Boot time)  |
|               | max. 10 s (Boot time) |

### Electrical properties

|                                                 |                                                                         |
|-------------------------------------------------|-------------------------------------------------------------------------|
| Maximum power dissipation for nominal condition | 2.86 W ( $U_B = 28,8 \text{ V}$ , $IN1 = IN2 = 50 \text{ mA}$ )         |
| Nominal operating mode                          | 100% operating factor                                                   |
| Interfaces                                      | DIN rail TBUS for connection to the master module, supplied as standard |
|                                                 | Encoder                                                                 |
|                                                 | Proximity switches                                                      |

### Air clearances and creepage distances between the power circuits

|                                |                                                                         |
|--------------------------------|-------------------------------------------------------------------------|
| Rated insulation voltage       | 250 V AC                                                                |
| Rated surge voltage/insulation | Basic insulation 4 kV between 24 V power supply and I/Os to the housing |

### Supply

|                                            |                                                                    |
|--------------------------------------------|--------------------------------------------------------------------|
| Designation                                | A1/A2                                                              |
| Rated control circuit supply voltage $U_S$ | 19.2 V DC ... 28.8 V DC                                            |
| Rated control circuit supply voltage $U_S$ | 24 V DC -20 % / +20 % (provide external protection, typically 1 A) |
| Rated control supply current $I_S$         | typ. 55 mA                                                         |
| Power consumption at $U_S$                 | typ. 1.32 W                                                        |
| Inrush current                             | 3.5 A ( $\Delta t = 1 \text{ ms}$ at $U_S$ )                       |
| Filter time                                | typ. 5 ms (at A1 in the event of voltage dips at $U_S$ )           |
| Protective circuit                         | Serial protection against polarity reversal                        |
|                                            | Suppressor diode                                                   |

# PSR-M-EM4-SINCOS1-SC - Extension module



1105011

<https://www.phoenixcontact.com/us/products/1105011>

## Input data

### Measurement

|                                               |                                                     |
|-----------------------------------------------|-----------------------------------------------------|
| Input name                                    | Proximity switch inputs                             |
|                                               | IN1, IN2                                            |
| Description of the input                      | NPN / PNP (3- or 4-wire)                            |
| Number of inputs                              | 2                                                   |
| Input voltage range "0" signal                | 0 V DC ... 5 V DC (NPN)                             |
|                                               | 16 V DC ... 28.8 V DC (PNP)                         |
| Input voltage range "1" signal                | 16 V DC ... 28.8 V DC (NPN)                         |
|                                               | 0 V DC ... 5 V DC (PNP)                             |
| Input current range "0" signal                | < 2 mA (NPN)                                        |
| Precision                                     | 5 % (in reference to the parameterized limit value) |
| Limit frequency                               | max. 5 kHz                                          |
| Max. permissible overall conductor resistance | 150 $\Omega$                                        |
| Protective circuit                            | Suppressor diode                                    |
| Current consumption                           | typ. 13 mA (NPN, at $U_S$ )                         |
|                                               | typ. -13 mA (PNP, at $U_S$ )                        |
|                                               | max. 17 mA (NPN, at 28.8 V DC)                      |
|                                               | max. -15 mA (PNP, at 28.8 V DC)                     |

### Measurement

|                                        |                                                                                                              |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Input name                             | Encoder input                                                                                                |
| Description of the input               | Sin/Cos                                                                                                      |
|                                        | Diagnostic function: $\sin^2(x) + \cos^2(x) = 1$                                                             |
| Number of inputs                       | 1                                                                                                            |
| Input impedance                        | 120 $\Omega$ (per trace)                                                                                     |
| Precision                              | 5 % (in reference to the parameterized limit value)                                                          |
| Limit frequency                        | max. 500 kHz                                                                                                 |
| Sine / cosine Signal form/signal level | 0.8 V <sub>PP</sub> ... 1.2 V <sub>PP</sub> (Offset: 2.5 V $\pm$ 20%, phase shift trace A, B: 90° $\pm$ 30°) |
| Current consumption                    | typ. 8 mA (Per track for $U_S$ )                                                                             |

## Output data

### Digital: Proximity switch supply (24V/0V)

|                              |                                          |
|------------------------------|------------------------------------------|
| Short-circuit protection     | no                                       |
| Nominal output voltage range | 16.7 V DC ... 26.3 V DC ( $U_S - 2.5$ V) |

## Connection data

### Connection technology

|           |     |
|-----------|-----|
| pluggable | yes |
|-----------|-----|

### Conductor connection

|                   |                  |
|-------------------|------------------|
| Connection method | Screw connection |
|-------------------|------------------|

# PSR-M-EM4-SINCOS1-SC - Extension module



1105011

<https://www.phoenixcontact.com/us/products/1105011>

|                                  |                     |
|----------------------------------|---------------------|
| Conductor cross section rigid    | 0.2 mm² ... 2.5 mm² |
| Conductor cross section flexible | 0.2 mm² ... 2.5 mm² |
| Conductor cross-section AWG      | 24 ... 12           |
| Stripping length                 | 7 mm                |
| Screw thread                     | M3                  |
| Tightening torque                | 0.5 Nm ... 0.6 Nm   |

## Signaling

|                           |                                                     |
|---------------------------|-----------------------------------------------------|
| Status display            | 5 x LED (yellow), 1 x LED (green), 2 x LED (orange) |
| Operating voltage display | 1 x green LED                                       |
| Error indication          | 2 x LED (red)                                       |

## Dimensions

|        |           |
|--------|-----------|
| Width  | 22.61 mm  |
| Height | 112.58 mm |
| Depth  | 113.6 mm  |

## Material specifications

|                  |                             |
|------------------|-----------------------------|
| Color (Housing)  | yellow (RAL 1018)           |
| Housing material | Polyamide PA non-reinforced |

## Characteristics

Safety data: EN ISO 13849

|                        |   |
|------------------------|---|
| Category               | 4 |
| Performance level (PL) | e |

Safety data: IEC 61508 - High demand

|                              |   |
|------------------------------|---|
| Safety Integrity Level (SIL) | 3 |
|------------------------------|---|

Safety data: EN IEC 62061

|                              |   |
|------------------------------|---|
| Safety Integrity Level (SIL) | 3 |
|------------------------------|---|

## Environmental and real-life conditions

### Ambient conditions

|                                                |                                                                                    |
|------------------------------------------------|------------------------------------------------------------------------------------|
| Degree of protection                           | IP20                                                                               |
| Min. degree of protection of inst. location    | IP54                                                                               |
| Ambient temperature (operation)                | -10 °C ... 55 °C (observe derating)                                                |
| Ambient temperature (storage/transport)        | -20 °C ... 85 °C                                                                   |
| Maximum altitude                               | ≤ 2000 m (Above sea level)                                                         |
| Max. permissible humidity (storage/transport)  | 95 % (non-condensing)                                                              |
| Max. permissible relative humidity (operation) | 95 % (non-condensing)                                                              |
| Shock                                          | 10g for $\Delta t = 16$ ms (continuous shock, 1000 shocks in each space direction) |
| Vibration (operation)                          | 10 Hz ... 150 Hz, 2g                                                               |

# PSR-M-EM4-SINCOS1-SC - Extension module



1105011

<https://www.phoenixcontact.com/us/products/1105011>

## Approvals

CE

|                |              |
|----------------|--------------|
| Identification | CE-compliant |
|----------------|--------------|

## Mounting


|                   |                        |
|-------------------|------------------------|
| Mounting type     | DIN rail mounting      |
| Assembly note     | Observe derating       |
| Mounting position | vertical or horizontal |



**PHOENIX  
CONTACT**

<https://www.phoenixcontact.com/us/products/1105011>

### Block diagram

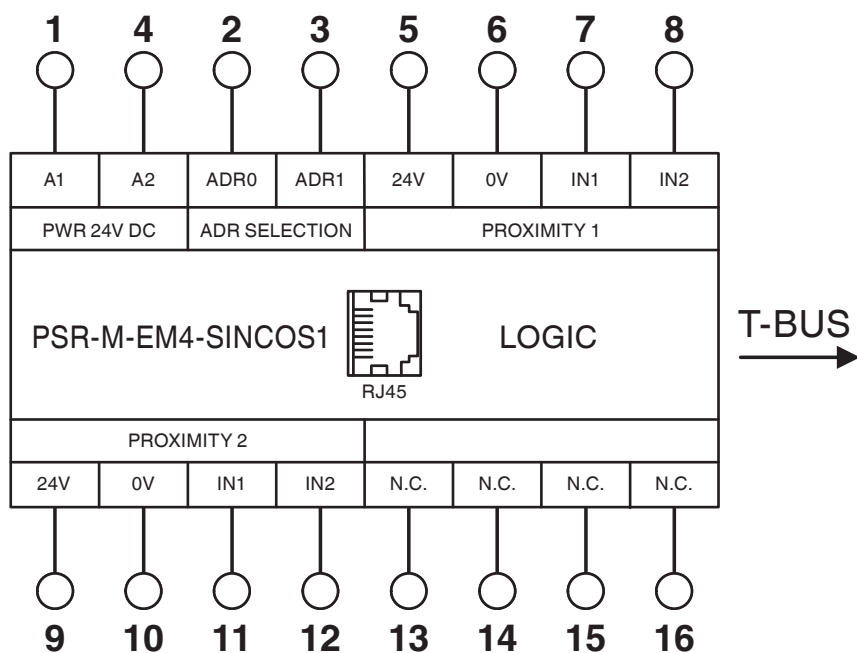

### Block diagram

### Example application

# PSR-M-EM4-SINCOS1-SC - Extension module



1105011

<https://www.phoenixcontact.com/us/products/1105011>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1105011>



### UL Listed

Approval ID: FILE E 238705



### cUL Listed

Approval ID: FILE E 238705



### EAC

Approval ID: RU\*-DE\*B.00606/20



### Functional Safety

Approval ID: Z10 029429 0013

cULus Listed

# PSR-M-EM4-SINCOS1-SC - Extension module



1105011

<https://www.phoenixcontact.com/us/products/1105011>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27371819 |
| ECLASS-13.0 | 27371819 |
| ECLASS-12.0 | 27371819 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001449 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39122200 |
|-------------|----------|



1105011

<https://www.phoenixcontact.com/us/products/1105011>

Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# PSR-M-EM4-SINCOS1-SC - Extension module



1105011

<https://www.phoenixcontact.com/us/products/1105011>

## Accessories

### CP-MSTB - Coding profile

1734634

<https://www.phoenixcontact.com/us/products/1734634>

Coding profile, is inserted into the slot on the plug or inverted header, red insulating material



---

### CR-MSTB - Coding section

1734401

<https://www.phoenixcontact.com/us/products/1734401>

Coding section, inserted into the recess in the header or the inverted plug, red insulating material



# PSR-M-EM4-SINCOS1-SC - Extension module



1105011

<https://www.phoenixcontact.com/us/products/1105011>

## CRIMPFOX 6 - Crimping pliers

1212034

<https://www.phoenixcontact.com/us/products/1212034>



Crimping pliers, for ferrules without insulating collar according to DIN 46228 Part 1 and ferrules with insulating collar according to DIN 46228 Part 4, 0.25 mm<sup>2</sup> ... 6.0 mm<sup>2</sup>, lateral entry, trapezoidal crimp

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)