

1418641

<https://www.phoenixcontact.com/us/products/1418641>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sample set, 17-position, Socket, straight, M12, coding: A, PCB mounting, SMD, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239205

Commercial data

Item number	1418641
Packing unit	5 pc
Minimum order quantity	5 pc
Product key	ABQXAA
GTIN	4055626162942
Weight per piece (including packing)	7.66 g
Weight per piece (excluding packing)	7.66 g
Country of origin	DE

## Technical data

### Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
--------------------	--

### Product properties

Product type	Contact insert
Number of positions	17
Shielded	yes
Coding	A
Thread type	M12

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage $U_N$	30 V
Nominal current $I_N$	1.5 A

### Connection data

Connection method	SMD
-------------------	-----

### Material specifications

Flammability rating according to UL 94	V0
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA

### Connector

#### Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Coding	A

### Mechanical properties

# SACC-CI-M12FS-17P SMD SH-SP - Sample set



1418641

<https://www.phoenixcontact.com/us/products/1418641>

## Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection (when plugged in)	IP67 (correctly plugged in and locked)
Degree of protection	IP67 (correctly plugged in and locked)
	IP67, when plugged in
Ambient temperature (operation)	-25 °C ... 105 °C
	-55 °C ... 105 °C (without mechanical actuation)

## Standards and regulations

### M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101
Note	In line with

## Mounting


Mounting type	PCB mounting
---------------	--------------

1418641

<https://www.phoenixcontact.com/us/products/1418641>

## Drawings

Schematic diagram

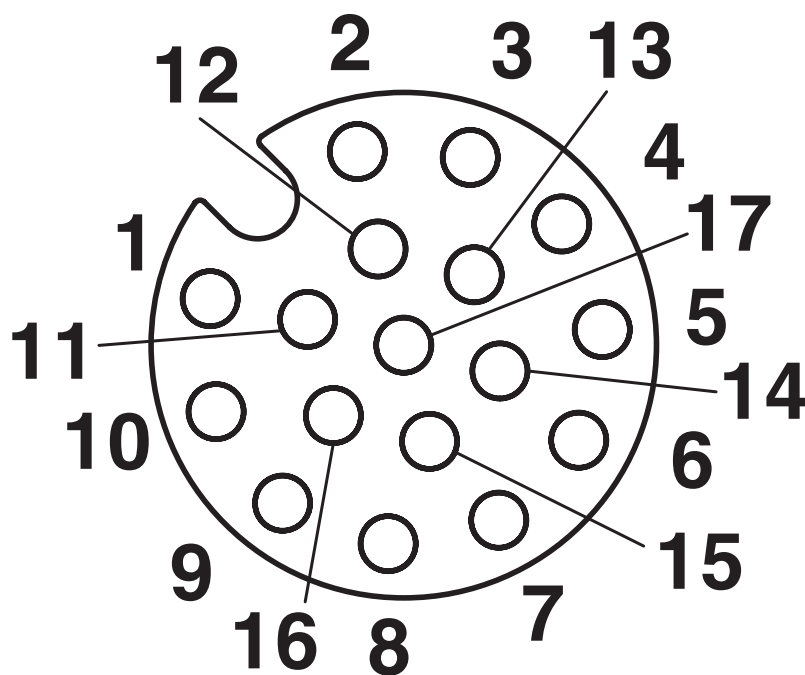

Pin assignment of M12 socket, 17-pos., A-coded, view of socket side

# SACC-CI-M12FS-17P SMD SH-SP - Sample set



1418641

<https://www.phoenixcontact.com/us/products/1418641>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1418641>

<div> <b>cULus Recognized</b> Approval ID: E221474-20160506</div>				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	30 V	1.5 A	-	-

# SACC-CI-M12FS-17P SMD SH-SP - Sample set



1418641

<https://www.phoenixcontact.com/us/products/1418641>

## Classifications

### ECLASS

ECLASS-11.0	27440223
ECLASS-12.0	27440223
ECLASS-13.0	27440223

### ETIM

ETIM 9.0	EC003557
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	25e037f7-ea77-4061-9138-2b9b3396600a

# SACC-CI-M12FS-17P SMD SH-SP - Sample set



1418641

<https://www.phoenixcontact.com/us/products/1418641>

## Accessories

### SACC-BP-F-M12/M15-6-SMD - Housing screw connection

1414021

<https://www.phoenixcontact.com/us/products/1414021>



Housing screw connection, Socket, M12, Rear mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239058

---

### SACC-BP-F-M12/M15-6-SMD SCO - Housing screw connection

1414023

<https://www.phoenixcontact.com/us/products/1414023>



Housing screw connection, Socket, M12-SPEEDCON, Rear mounting, M15 x 1, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239059



# SACC-CI-M12FS-17P SMD SH-SP - Sample set



1418641

<https://www.phoenixcontact.com/us/products/1418641>

## SACC-FP-F-M12/M14 SMD - Housing screw connection

1412079

<https://www.phoenixcontact.com/us/products/1412079>

M12 female connector, front mounting SMD with M14 screw fastening



---

## SACC-FP-F-M12/PRESS SMD - Housing screw connection

1412081

<https://www.phoenixcontact.com/us/products/1412081>

Housing screw connection, Socket, M12, Front mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1238973



# SACC-CI-M12FS-17P SMD SH-SP - Sample set



1418641

<https://www.phoenixcontact.com/us/products/1418641>

## SACC-BP-F-M12/SMD-0,9/1,6-9TIP - Housing screw connection

1419569

<https://www.phoenixcontact.com/us/products/1419569>



Housing screw connection, Socket, M12, Rear mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239268

---

## SACC-BP-F-M12/SMD-1,6/2,3-9TIP - Housing screw connection

1419570

<https://www.phoenixcontact.com/us/products/1419570>



Housing screw connection, Socket, M12, Rear mounting

## SACC-CI-M12FS-17P SMD SH-SP - Sample set

1418641

<https://www.phoenixcontact.com/us/products/1418641>



## SACC-BP-F-M12/SMD-2,3/3,0-9TIP - Housing screw connection

1419571

<https://www.phoenixcontact.com/us/products/1419571>



Housing screw connection, Socket, M12, Rear mounting, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239270

---

## SACC-BP-F-FIX/NUT-BK-SMD - Fixing sleeve

1419568

<https://www.phoenixcontact.com/us/products/1419568>



Fixing sleeve for M12 housing screw connection with tolerance-compensating function, for SMD-solderable M12 socket contact inserts.

# SACC-CI-M12FS-17P SMD SH-SP - Sample set



1418641

<https://www.phoenixcontact.com/us/products/1418641>

## SACC-BP-F-FIX/NUT-CY-SMD - Fixing sleeve

1419565

<https://www.phoenixcontact.com/us/products/1419565>



Fixing sleeve for M12 housing screw connection with tolerance-compensating function, for SMD-solderable M12 socket contact inserts.

---

## SACC-BP-F-FIX/NUT-GN-SMD - Fixing sleeve

1419566

<https://www.phoenixcontact.com/us/products/1419566>



Fixing sleeve for M12 housing screw connection with tolerance-compensating function, for SMD-solderable M12 socket contact inserts.

# SACC-CI-M12FS-17P SMD SH-SP - Sample set



1418641

<https://www.phoenixcontact.com/us/products/1418641>

## SACC-BP-F-FIX/NUT-VT-SMD - Fixing sleeve

1419567

<https://www.phoenixcontact.com/us/products/1419567>



Fixing sleeve for M12 housing screw connection with tolerance-compensating function, for SMD-solderable M12 socket contact inserts.

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)