

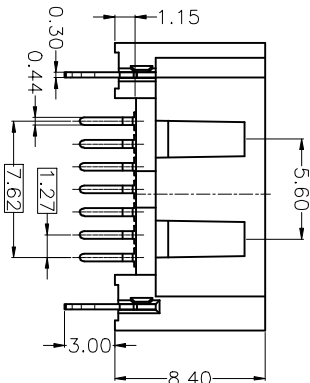

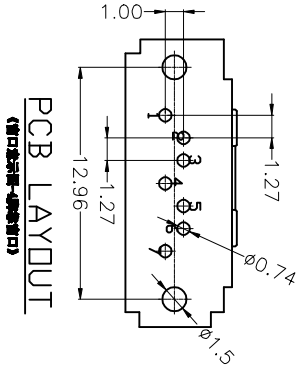


REV.	ECN NO.	DESCRIPTION	DRWN	APPD.	DATE
REV	ECN_NO.	DESCRIPTION	DR.	APPD.	DATE

SPEC:

Current Rating: 3amps
Insulator Resistance: 5000m Ω Min
Dielectric Withstanding: AC 500V
Operating Temperature: -40° to +105°
Contact Material: Copper alloy T-0.25
Insulator Material: Polyester, UL 94V-0 LCP
Finish :
Gold/tin plating on contact area
100u" min. Tin-lead Plating on solder tails
50u" min. nickel under plating over all tin,
Max. Processing Temp:
230C° for 30-60seconds (260C° for 10 secinds)

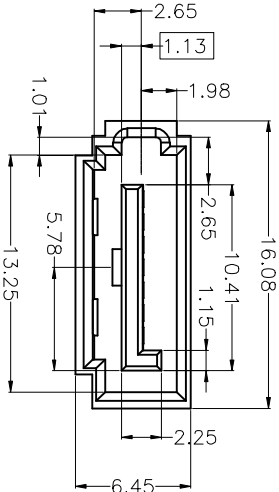

建议引脚定义:			
1#	GND	(接地)	
2#	A+	(传输正极)	
3#	A-	(传输负极)	
4#	GND	(接地)	
5#	B-	(接收负极)	
6#	B+	(接收正极)	
7#	GND	(接地)	

SECTION A-A

Table:

PRODUCT NO.	ITEM	PART NO.	PART NAME	QTY	Material
ST11370101U	1	PS00490610	CONTACT	7	C2680R-H1GOLD 1U"
	2	PP0093BK10	HOUSING	1	LCP+30%GF,BLACK
	3	PP0093BK10	鱼叉	2	C2680R-H1TIN 100U"

深圳市连欣科技有限公司

UNITS	SCALE	REV.	SHEET
mm	SCALE	REV.	PAGE
DATE			
TITLE			
SATA 7P 全包开窗 A型180度插板式 DTP			
DR.			
GENERAL TOLERANCE			
0.			
0.0			
0.00			
0.			
0.0°			

0.	CHK.	MAT'L	FINISH	FINISH
0.0		MATERIAL		
0.00	APPD.	DWG.NO.	PART NO.	SIZE
0.		DWG_NO.	C	A4
0.0*			XUTS-0718-0720	

