


6		5			
ITEM	PART#	DESCRIPTION	QTY	UOM	
A,B	512160600	2.0 WtB Rec Hsg 6Ckt	2	PC	
C	593708000	2.0 WtB Crimp Rec Chn	12	PC	
D	----	WHITE PART ID LABEL	1	PC	

PART NUMBER	TITLE	L1	L2(REF)
2244821060	MicroTPA 2.0 R-R 6ckt 50mm disc Sn	50±5	15
2244821061	MicroTPA 2.0 R-R 6ckt 100mm disc Sn	100±5	15
2244821062	MicroTPA 2.0 R-R 6ckt 150mm disc Sn	150±5	15
2244821063	MicroTPA 2.0 R-R 6ckt 300mm disc Sn	300±5	15
2244821064	MicroTPA 2.0 R-R 6ckt 600mm disc Sn	600±5	15

2		1	
FROM	TO	DESCRIPTION	COLOUR
A1	B1	1X22AWG DISC SR-PVC BK UL10002	BLACK
A2	B2	1X22AWG DISC SR-PVC BK UL10002	BLACK
A3	B3	1X22AWG DISC SR-PVC BK UL10002	BLACK
A4	B4	1X22AWG DISC SR-PVC BK UL10002	BLACK
A5	B5	1X22AWG DISC SR-PVC BK UL10002	BLACK
A6	B6	1X22AWG DISC SR-PVC BK UL10002	BLACK

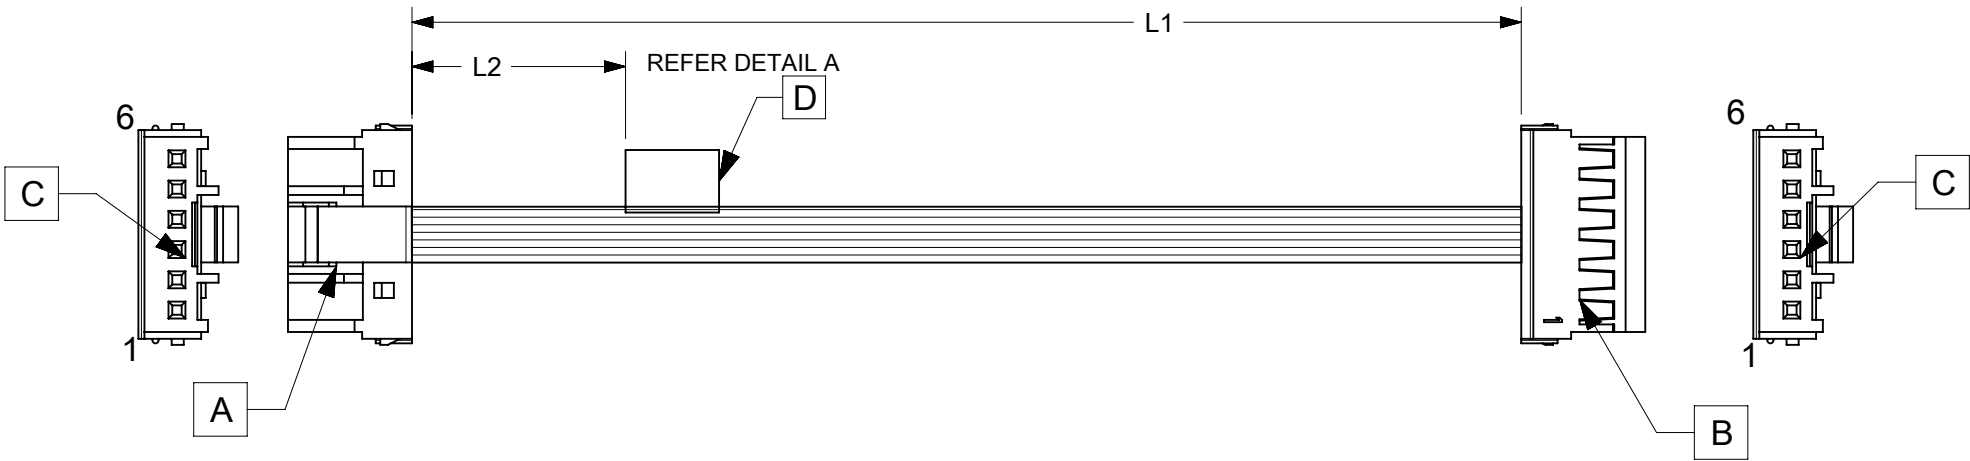

- NOTES:
1. CABLE ASSEMBLY MUST PASS 100% CONTINUITY AND POLARITY TEST.
 2. CONNECTOR VIEW SHOWN FROM MATING SIDE.
 - 3.LABEL TEXT MUST BE 2 MM MAX. IN HEIGHT WITH ARIAL FONT.
 - 4.LABEL MUST BE WRAPPED IN FLAG TYPE ON A SINGLE CABLE.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2023/01/04	A	INITIAL RELEASE	THANUB
DOCUMENT STATUS	P1	RELEASE DATE	2023/02/08 09:35:32

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	DIMENSION UNITS	SCALE
$\nabla_A = 0$	mm	NTS
$\nabla_C = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)	
$\nabla_P = 0$	ANGULAR TOL ± °	
DIVISIONAL SYMBOLS	4 PLACES	±
	3 PLACES	±
	2 PLACES	±
	1 PLACE	±
	0 PLACES	±
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	
	THIRD ANGLE PROJECTION	DRAWING
	SERIES	MATERIAL NUMBER
	CUSTOMER	SHEET NUMBER

CURRENT REV DESC:		EC NO: 736615		2023/01/04	
DRWN: THANUB		CHK'D: SKUMAR07		2023/02/08	
APPR: SKUMAR07		INITIAL REVISION:		2023/02/08	
DRWN: THANUB		APPR: SKUMAR07		2023/01/04	
APPR: SKUMAR07		DOCUMENT NUMBER		2244821060	
THIRD ANGLE PROJECTION		DOC TYPE		PSD	
DRAFTING		DOC PART		000	
A4-SIZE		REVISION		A	
224482		GENERAL MARKET		1 OF 1	