# CKUA267NN00450051000 V ACTIVE



TE Internal #: CKA267N00450051000

Cable-to-Cable, 6 Position, Power & Signal, Cable Mount (Free-Hanging), Electrodeposited Nickel, Zinc Alloy, PA66, Standard

Circular Connectors

View on TE.com >



Connectors > Circular Connectors > Standard Circular Connectors











Connector System: Cable-to-Cable

Connector Mounting Type: Cable Mount (Free-Hanging)

Number of Positions: 6

Sealable: No

Circuit Application: Power & Signal

## **Features**

## Product Type Features

| Configuration Footunes |                  |
|------------------------|------------------|
| Shell Type             | Metal            |
| Sealable               | No               |
| Connector System       | Cable-to-Cable   |
| Product Type           | Housing Assembly |

### Configuration Features

| Number of Positions        | 6  |
|----------------------------|----|
| Number of Power Positions  | 4  |
| Number of Signal Positions | 2  |
| Contacts Preloaded         | No |

## **Electrical Characteristics**

| Operating Voltage | 250 VAC, 630 VAC |
|-------------------|------------------|

## **Body Features**

| Environmental Protection Type | Sealed |
|-------------------------------|--------|
| Environmental Protection      | IP67   |
|                               |        |



| Shell Plating Material                      | Electrodeposited Nickel          |
|---|----------------------------------|
| Shell Base Material                         | Zinc Alloy                       |
| Circular Connector Insulation Material Type | PA66                             |
| Mechanical Attachment                       |                                  |
| Mating Retention Type                       | Speedtec (Triple Start Threaded) |
| Mating Alignment                            | With                             |
| Connector Mounting Type                     | Cable Mount (Free-Hanging)       |
| Mating Retention                            | With                             |
| Housing Features                            |                                  |
| Circular Connector Shell Size               | 40                               |
| Alignment Keyed                             | 0°                               |
| Dimensions                                  |                                  |
| Cable Diameter Range                        | 16.5 – 25 mm[.65 – .98 in]       |
| Usage Conditions                            |                                  |
| IP Water Sealing Level                      | IP67                             |
| Operating Temperature Range                 | -20 - 130 °C[-4 - 266 °F]        |
| Operation/Application                       |                                  |
| Durability Rating                           | 500 Cycles                       |
| Circuit Application                         | Power & Signal                   |
| Shielded                                    | Yes                              |
| Industry Standards                          |                                  |
| UL Flammability Rating                      | UL 94V-0                         |
| Compatible With Approved Standards Products | UL                               |

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant with Exemptions   |
|---|---|
| EU ELV Directive 2000/53/EC                   | Compliant with Exemptions   |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold  |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024<br>(241)<br>Candidate List Declared Against: JAN 2024<br>(240) |



SVHC > Threshold:

Pb (3.5% in Component)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content

Not Yet Reviewed for halogen content


Solder Process Capability

Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

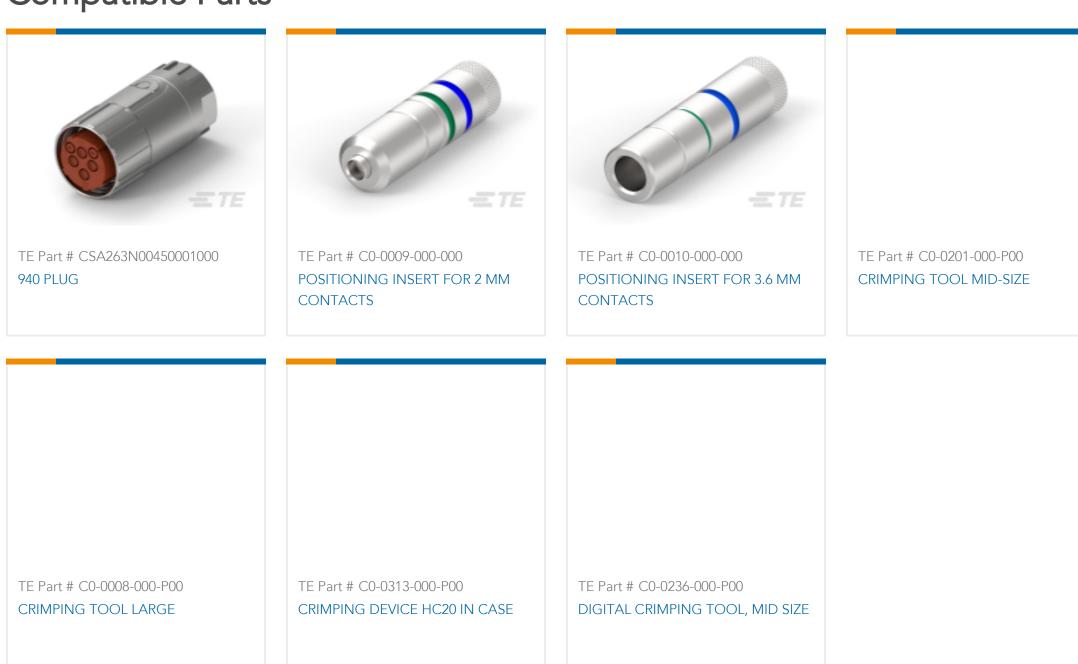

## Customers Also Bought

Cable-to-Cable, 6 Position, Power & Signal, Cable Mount (Free-Hanging), Electrodeposited Nickel, Zinc Alloy, PA66, Standard Circular Connectors





TE Part #60-0225-011-000 CONTACT SOCKET 3,6 MM



TE Part #AKA034M04620200000
623 EXTENSION, SPEEDTEC-READY



TE Part #ASA000N00390235000 623 PLUG





TE Part #CKA268N00440051000
940 EXTENSION, SPEEDTEC-READY



TE Part #DEA003N0000001000
958 RECEPTACLE

TE Part #BSA852F0185201A000 917 PLUG TE Part #11-0468-002-000 623 EXTENSION HOUSING IG3



## **Documents**

### **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_CKA267N00450051000\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_CKA267N00450051000\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_CKA267N00450051000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages

CKA267N00450051000

English

fuer Datenblaetter, die online konfigurierbar sind

German

## CKUA267NN00450051000

Cable-to-Cable, 6 Position, Power & Signal, Cable Mount (Free-Hanging), Electrodeposited Nickel, Zinc Alloy, PA66, Standard Circular Connectors



**Product Specifications** 

German