


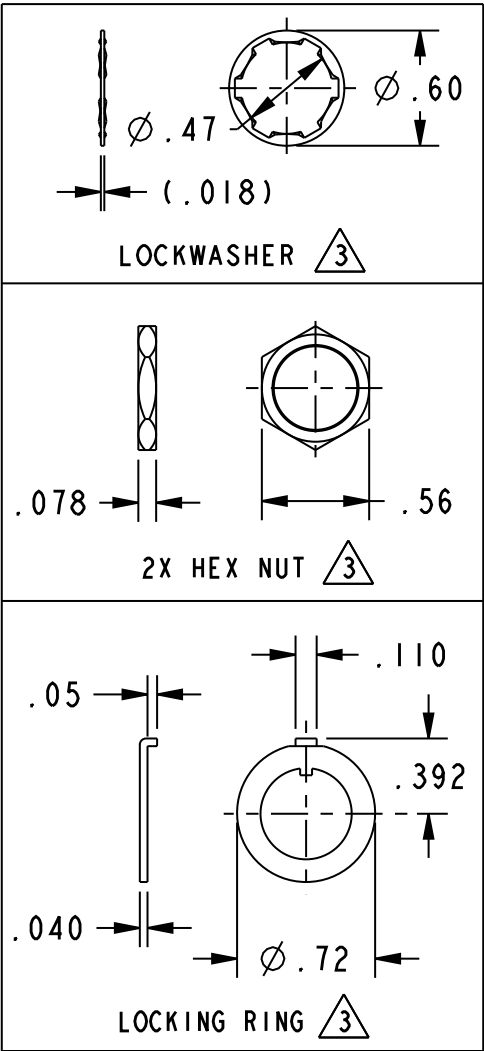
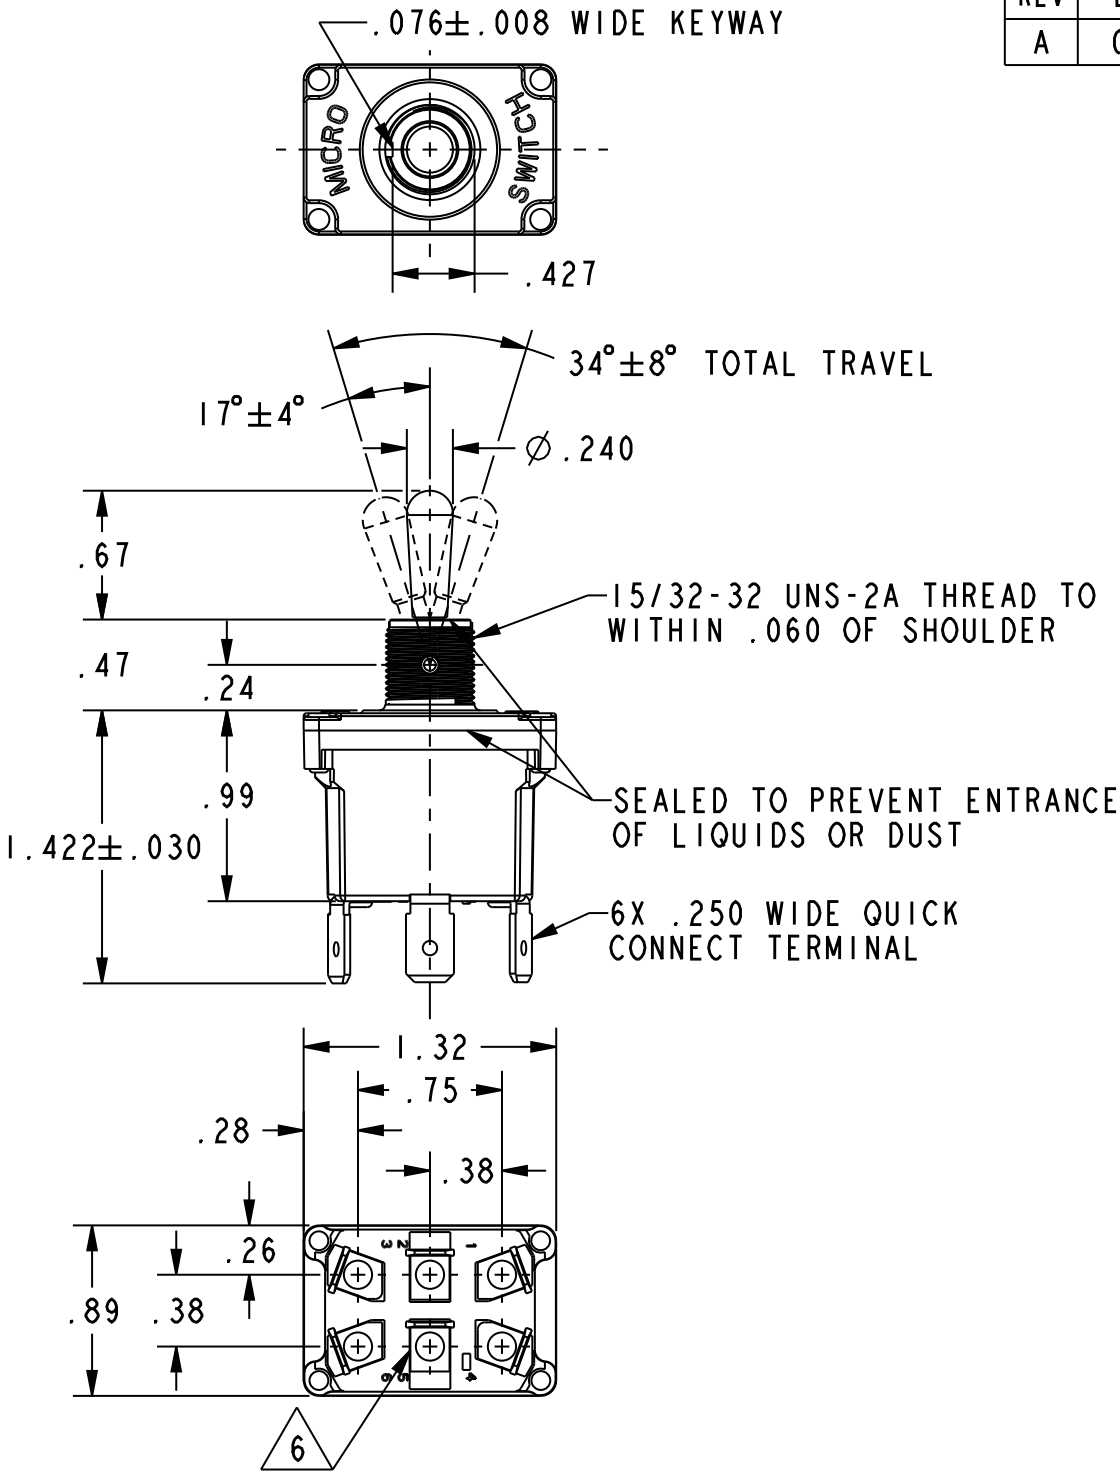






HONEYWELL PART NUMBER
SEE TABLE

REV	DOCUMENT	CHANGED BY	CHECK
A	0051211	LK 16APR09	CMH

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN 			ELECTRICAL DATA
	KEYWAY SIDE (1-2, 4-5)	CENTER (1-1, 4-5)	OPPOSITE KEYWAY (2-3, 5-6)	
32NT911-1	ON	OFF	ON	L191 15A 125, <u>250</u> , 277 VAC 1/2HP 125 VAC 1HP <u>250</u> , 277 VAC 5A 125 VAC "L" 
32NT911-2	OFF	NONE	ON	
32NT911-3	ON	NONE	ON	
32NT911-21	NONE	OFF	ON	
32NT911-31	NONE	ON	ON	
32NT911-4	MOM OFF	NONE	ON	L192 10A 125, <u>250</u> , 277 VAC 1/4HP 125 VAC 1/2HP <u>250</u> , 277 VAC 3A 125 VAC "L" 
32NT911-5	MOM ON	OFF	ON	
32NT911-6	MOM ON	NONE	OFF	
32NT911-7	MOM ON	OFF	MOM ON	
32NT911-8	MOM ON	NONE	ON	
32NT911-61	MOM ON	OFF	NONE	



- NOTES:
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160° F CONTINUOUSLY AT FULL RATED LOAD.
 - 2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH.
 -  FURNISHED UNASSEMBLED.
 -  APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS.
 - 5 - TO ORDER WITHOUT HARDWARE ADD (-NH) SUFFIX TO CATALOG LISTING.
 -  THIS LISTING REQUIRES TERMINAL #5 TO BE ROTATED 180° RELATIVE TO STANDARD POSITION.

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACES x ± ONE PLACE .x ± 0.03 TWO PLACE .xx ± 0.015 THREE PLACE .xxx ± 0.005 ANGLES x ± THIRD ANGLE PROJECTION 	DRAWN	SJK	17MAR09	Honeywell				
	CHECK	MS	17MAR09					
	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - TOGGLE				
	INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	CAGE CODE	DRAWING NAME	REV
Pro/ENGINEER			3D	B	I	-	32NT911 SERIES CHART 1	A
				SCALE	1:1		SHEET	1 OF 1