

OverviewResources & Support

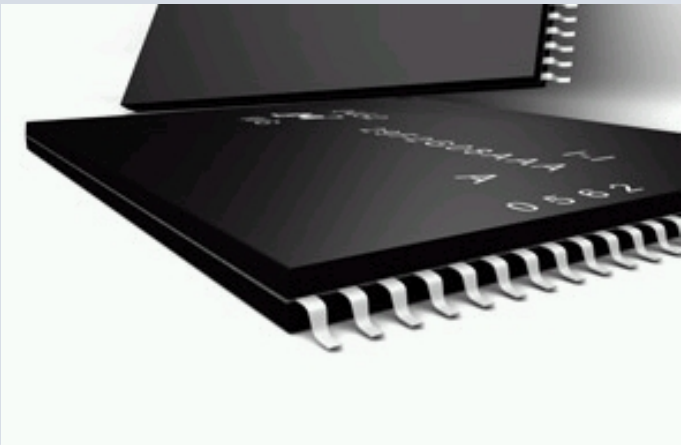


Illustration only. See data sheet for product specifications.

SPECIFICATIONS

Density: 4Gb
Part Status: Production
ROHS:Yes
Width: x8
Voltage: 1.8V
Package: TSOP
Pin Count: 48-pin
Bits/Cell: SLC
I/O: Common
Op Temp: 0C to +70C

DESCRIPTION

Micron NAND Flash uses an industry proven floating gate cell and a standard interface to enable pin and function drop-in compatibility and easy integration into most existing designs.

RoHS-Compliant:

This part meets internationally recognized Pbfree standards, including RoHS.

[RoHS Certificate of Compliance](#)

[China RoHS Certificate](#)

Orderable Part	Part Status	Buy Samples	Distributor Stock
MT29F4G08ABCWC:C	Production	Contact Rep	Contact Rep

Please note: Distributor inventory is anestimate and may not reflect actual available inventory.

Some links on this page will take you from the Micron Web site. Micron doesnot control the content on these Web sites.

Resources

Documents

[4Gb, 8Gb: x8, x16 SLC NAND Flash Data Sheet \(NDA - Contact Factory\)](#)

Date:05/08
Size:0Kb
Type:Data Sheet (PDF)

Simulation Models

[Verilog](#)

Date:02/09
Size:0Kb
Version: (secure)

[HSpice](#)

Date:08/08
Size:1409Kb
Version: (secure)

[Denali](#)

Date:04/09
Size:0Kb
Version: 04/09

[IBIS](#)

Date:08/08
Size:1494Kb
Version: (secure)

About Micron Models :

By downloading any Micron model fromthis site, you must agree to the terms of[Micron's SimulationModels License Agreement](#). If you do not agree to terms, you do not have permission to use the site or download material from it.

About Non-Micron Models:

For your convenience, Micron links to third-party simulation models. Note that Micron does not guarantee functionality or accuracy of these models.

Site Map | Contact Us | Media Center | Crucial.com | Lexar.com

© 2009 Micron Technology, Inc. All Rights Reserved

 RSS Feeds | Privacy Policy | Terms of Use

Downloaded from [Arrow.com](#)