
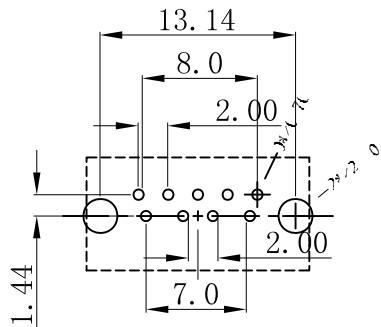
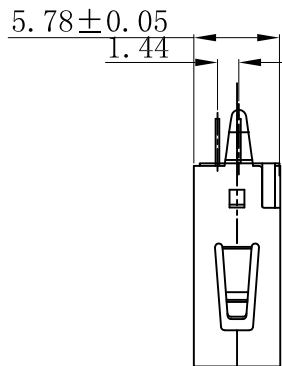
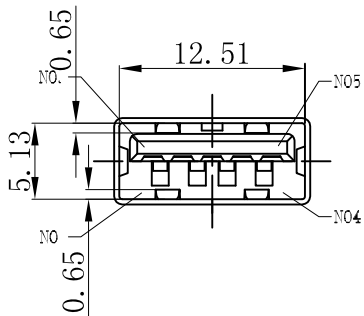
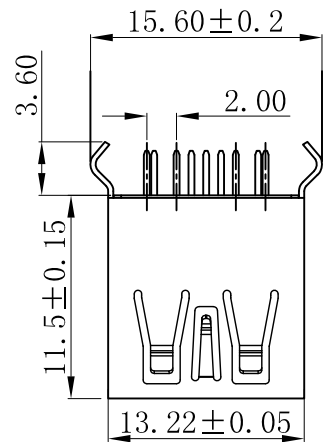




由Autodesk 教育版产品制作

由Autodesk 教育版产品制作



RECOMMENDED P.C.B LAYOUT(±0.05)

MAPX	MODIFICATION	DATE



NOTES:

1.ELECTRONIC:

CONTACT RESISTANCE: 30mohm MAX

INSULATION RESISTANCE: 1000 Mohm MIN

WITHSTAND VOLTAGE:AC 500V,1min.

2.MECHANICAL:

DURABILITY: 1500 CYCLE.

3.ENVIRONMENT CHARACTERISTICS:

OPERING TEMPERATURE:-55? TO +105?

4.RECOMMANDER PCB THICKNESS 1.2 TO 1.60MM

5	SHELL	1	COPPER ALLOY	NI PLATED
4	5PIN	5	COPPER ALLOY	AU/TIN PLATED
3	4PIN	4	COPPER ALLOY	AU/TIN PLATED
2	COVER	1	THERMOPLASTIC	〈UL 94V-0〉 BLUE
1	HOUSING	1	THERMOPLASTIC	〈UL 94V-0〉 BLUE
No.	PART NAME	QTY	MATERIAL	REMARK

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERMSE

X.	±0.15	X.	±5.°
.X	±0.10	.X	±2.°
.XX	±0.01	.XX	±1.°
.XXX	±0.002	.XXX	±0.5°

深圳市精拓金电子有限公司

单位 UNITS	MM	制图 DRAWING	邱建辉	制图料号 PRODUCT PART NO	916-162A205EY10200
比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NAME	USB AF 3.0/180度11.5弯脚无边 铜壳LCP蓝胶24H
日期 DATE	20160728	核准 APPD	黄国荣	角法 VIEW	版本 VER
					AD

由Autodesk 教育版产品制作