
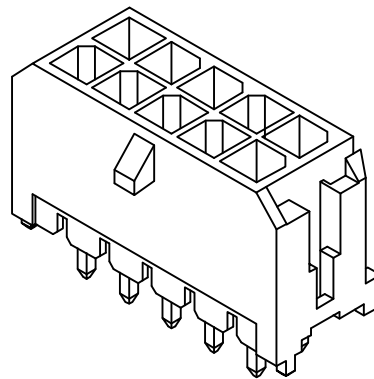
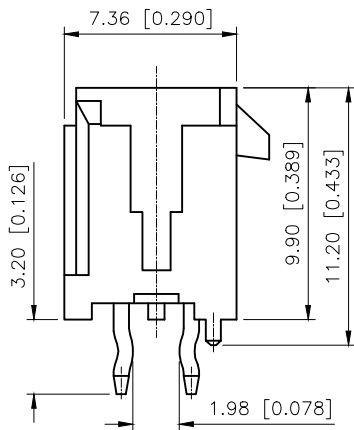


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.07.22	阿 树

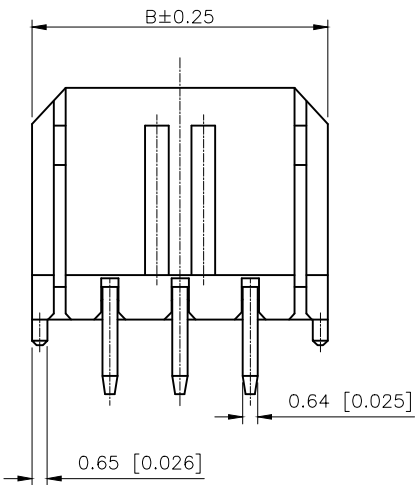



■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:5A AC/DC
- Withstanding Voltage:1000V AC/minute
- Temperature range:−45°C+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤10mΩ
- After environmental testing: ≤10mΩ

PART NO.:

X3025 W V-2xXX-LP SW
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:W-Wafer
③Welding Board Angle:V-Straight 180°
④Row No-Pin No: 2xXX-2x01P~2x12P
⑤Material:LP-LCP UL94V-0
⑥Planting:SW-Matte Tin
V01:Gold 1u"

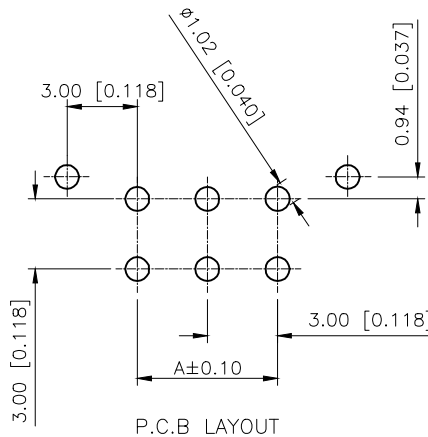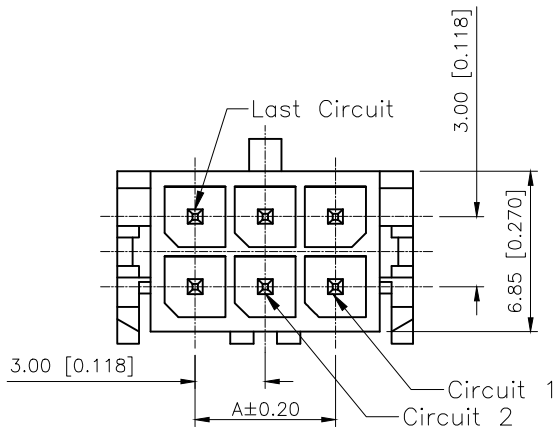

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2x01	---	6.65	2x07	18.00	24.65
2x02	3.00	9.65	2x08	21.00	27.65
2x03	6.00	12.65	2x09	24.00	30.65
2x04	9.00	15.65	2x10	27.00	33.65
2x05	12.00	18.65	2x11	30.00	36.65
2x06	15.00	21.65	2x12	33.00	39.65

X3025WV-2xXX-LPSW	LCP UL 94V-0	Brass	Matte Tin	X3025H
X3025WV-2xXX-LPV01			Gold 1u"	
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿 树	VIEW:		MODEL TYPE:	3.00 mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X3025WV-2xXX-LPXXX
APPROVED		SIZE:	A4	DWG NO.:	