




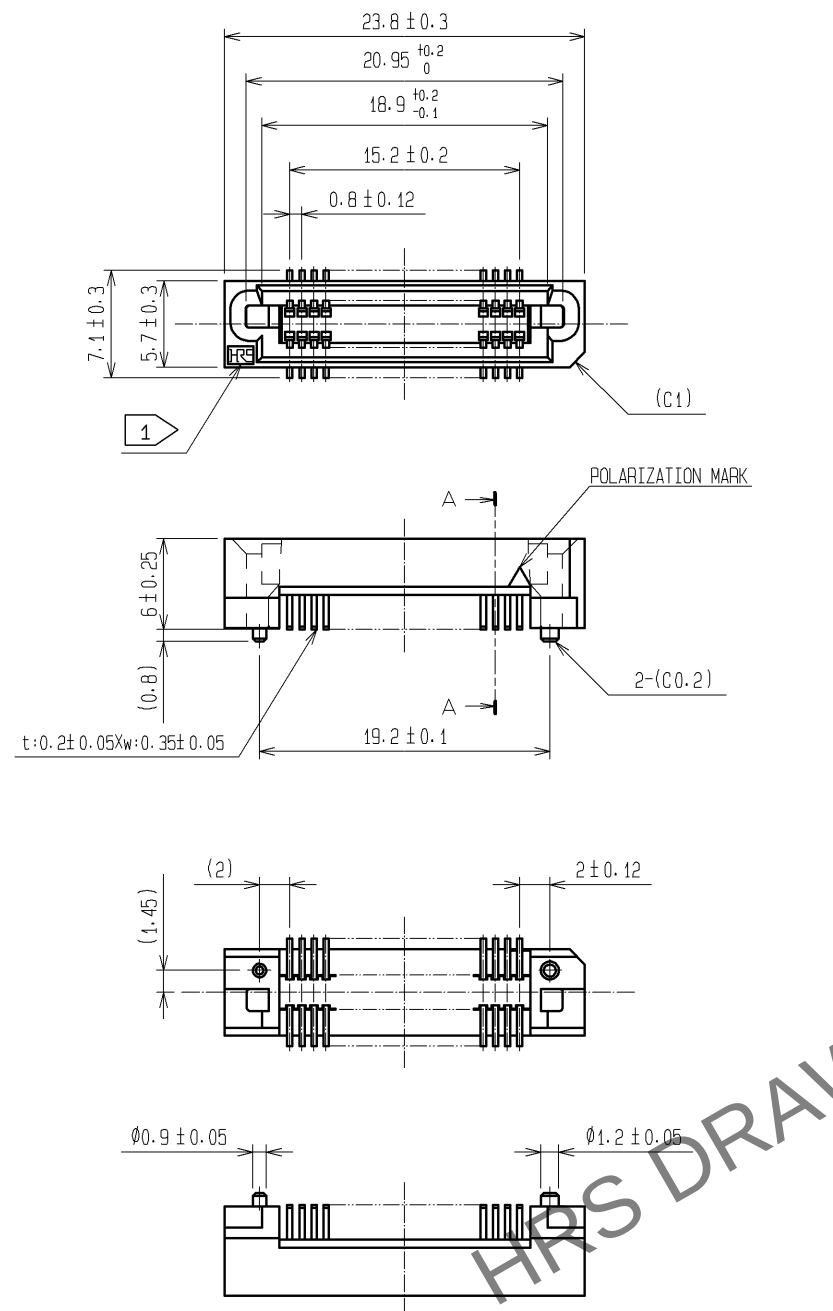

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS:0.15mm)

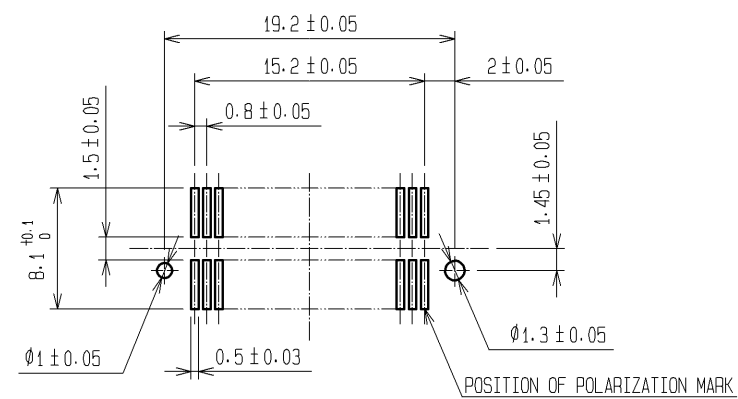


A-A (10:1)

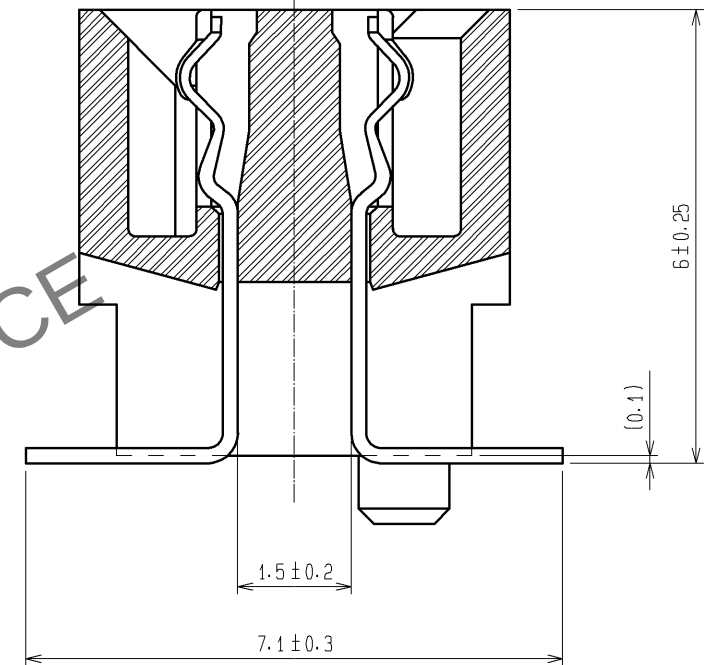

- NOTE
- 1 HRS MARK SHALL BE OPTIONAL.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 - 3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.
 - 4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
 - 5 FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.	5	POLYIMIDE	(TAPE FOR VUCUUM PICKUP)
		LEAD AREA:TIN-PLATING 1μm min.			(TOP COVER TAPE)
		UNDER PLATING:NICKEL 2μm min.			(EMBOSSED CARRIER TAPE)
1	PPS	LIGHT BROWN (UL94V-0)	4	POLYESTER	
			3	POLYSTYRENE	
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT △		DESCRIPTION OF REVISIONS
HRS		APPROVED : HS. OKAWA	08.07.23		DESIGNED
HIROSE ELECTRIC CO., LTD.		CHECED : HT. YAMAGUCHI	08.07.23		CHECKED
		DESIGNED : SY. KAMIGA	08.07.22		DATE
		DRAWN : HK. SUNADORI	08.07.17		
		DRAWING NO.	EDC3-084980-23		
		PART NO.	FX6-40S-0.8SV2(93)		
		CODE NO.	CL576-0123-0-93		
			△ 1/2		

Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

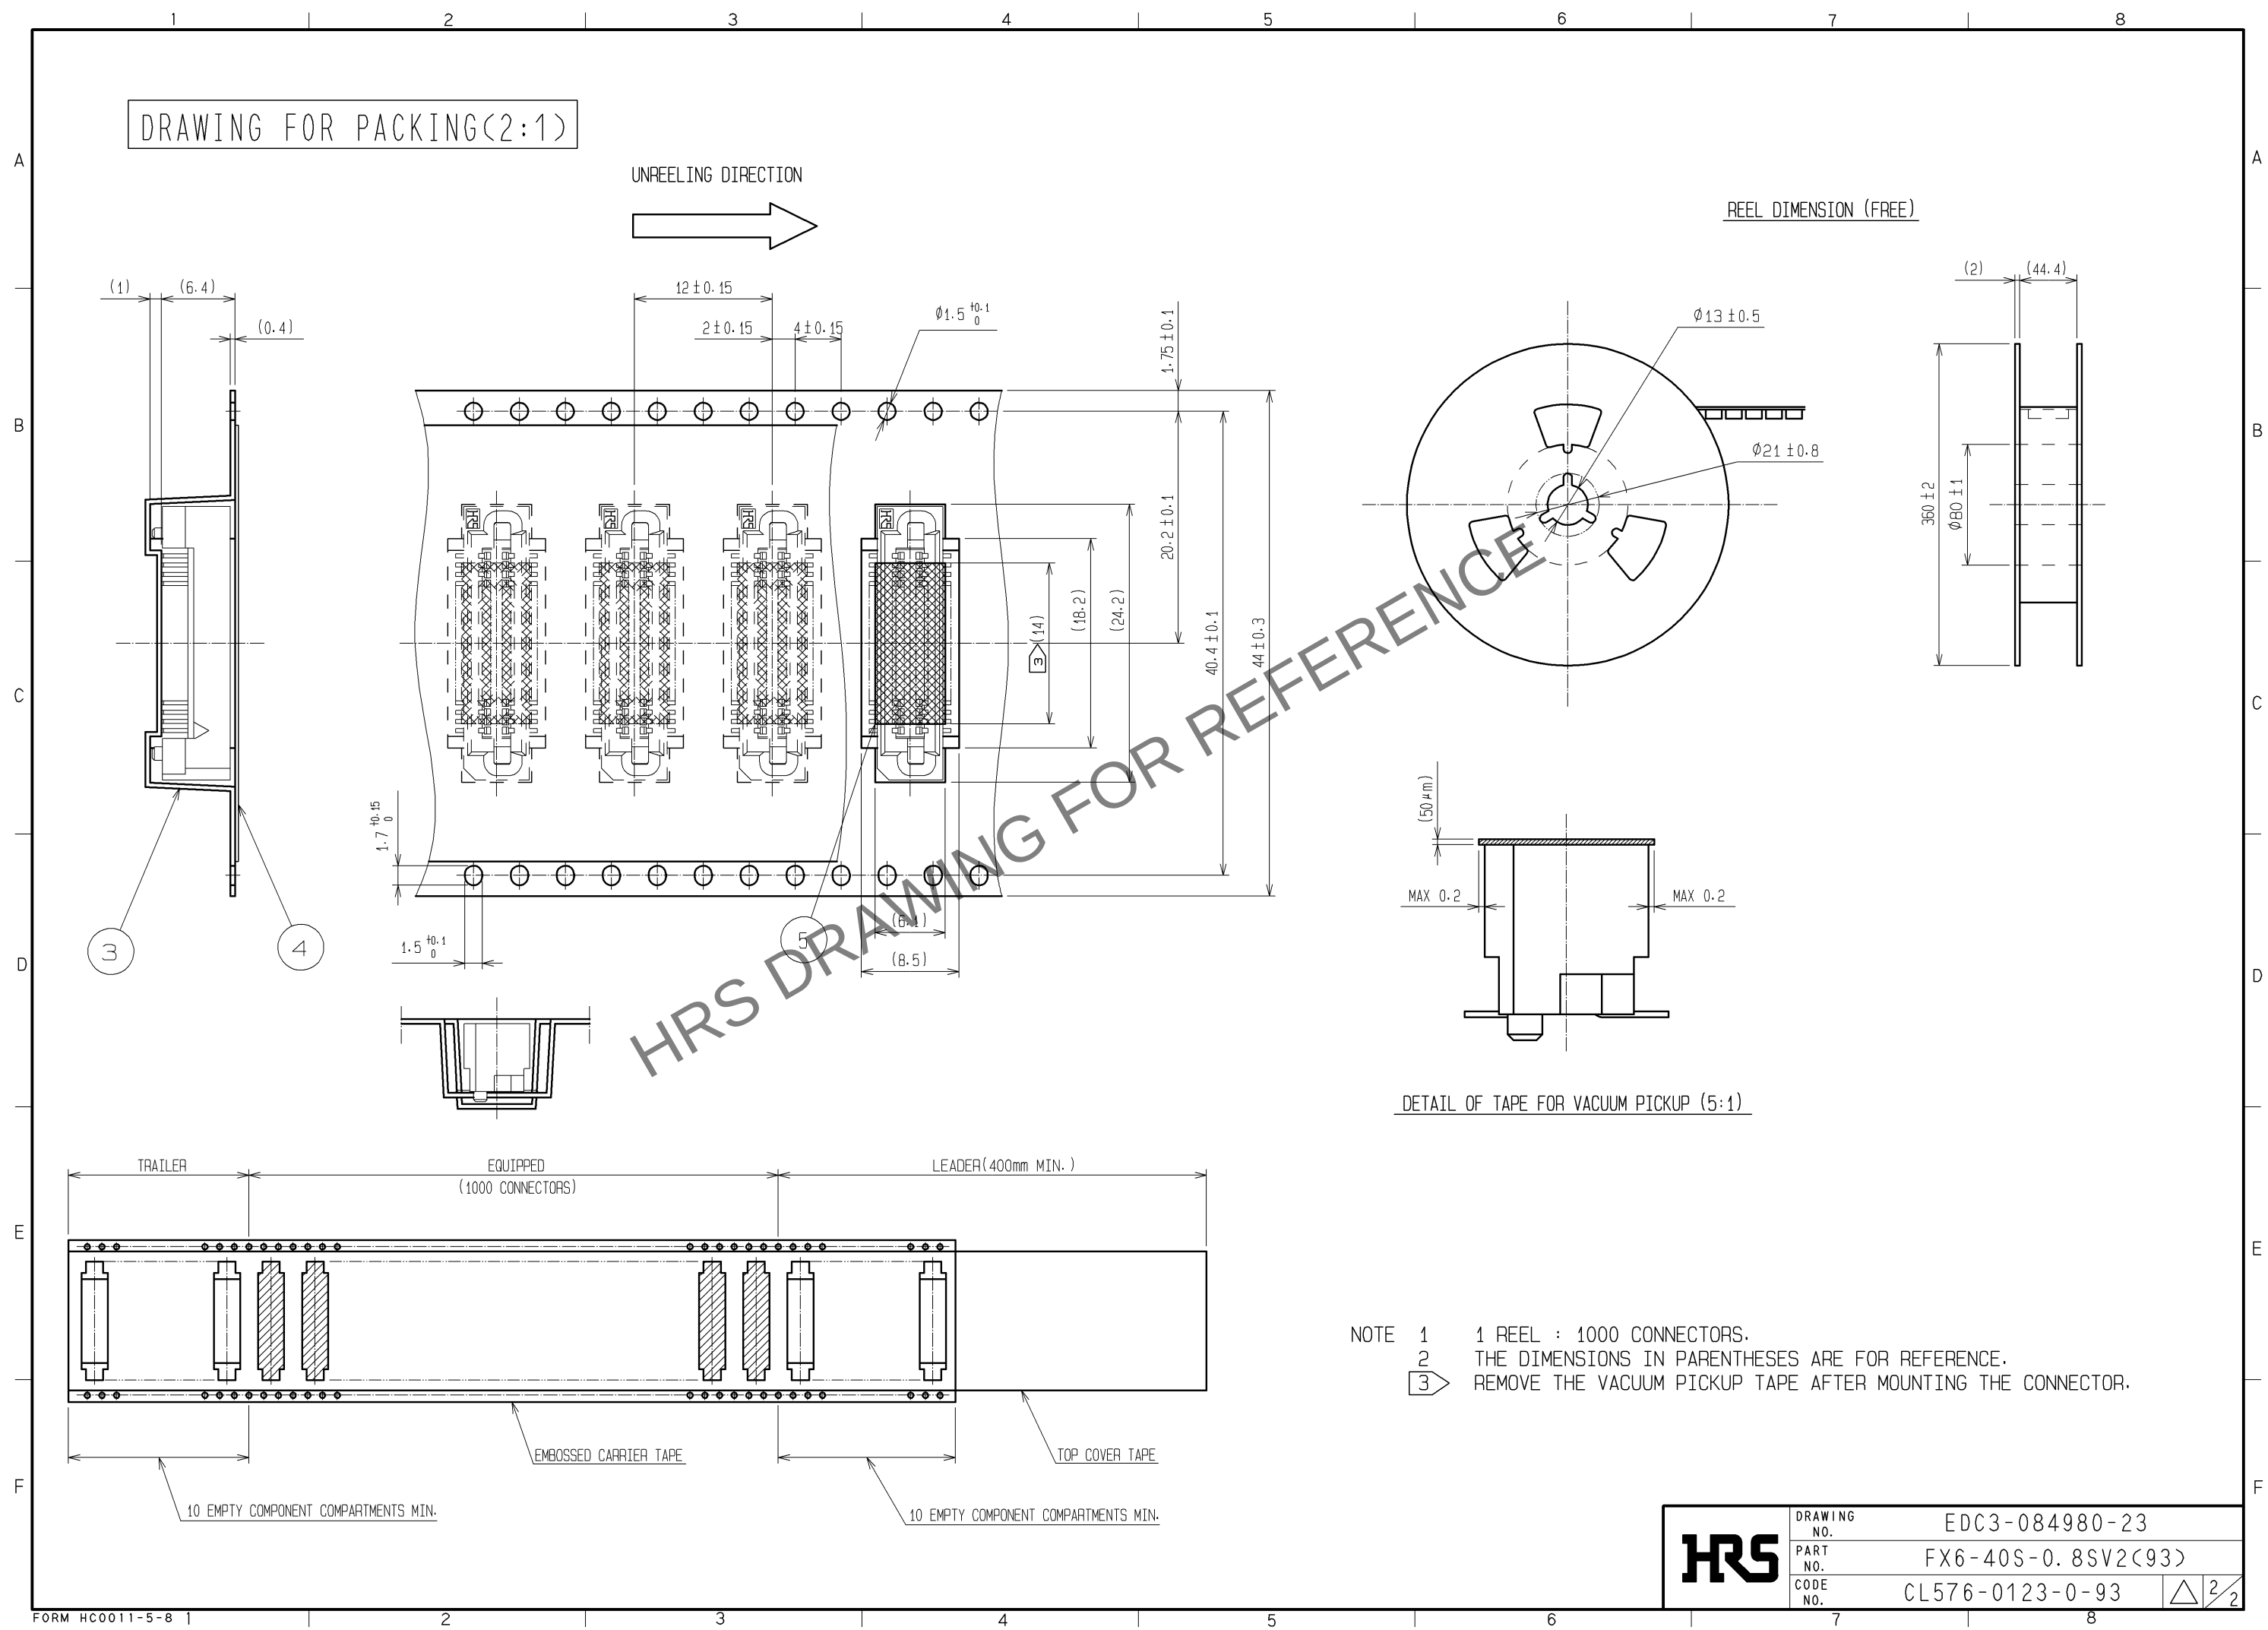

HRS	DRAWING NO.	EDC3-084980-23		
	PART NO.	FX6-40S-0.8SV2(93)		
	CODE NO.	CL576-0123-0-93		
				2/2