

Actuator

45-

2924.2000.113



<https://eao.com/p/45-2924.2000.113>

Your product:



45-2924.2000.113 Actuator

FRONT

Front dimension:	Ø 29,5 mm
Front bezel colour:	Silver
Front bezel material:	Metal
Front form:	round

MOUNTING

Mounting cut-out:	Ø 22.3 mm
Design:	raised
Mounting type:	Panel mounting

MECHANICAL CHARACTERISTIC

Weight:	0.08 kg
Switching action:	Maintained - Rest (a) - Maintained
Switching positions:	3 positions
Switching angle:	45° left / 45° right / -45° ... +45°
Mechanical lifetime:	1 Mio. cycles of operation
Operating frequency:	1 800/h

AMBIENT CONDITION

IP front protection:	IP66, IP67, IP69K
Operating temperature:	- 25 °C ... + 70 °C
Storage temperature:	- 40 °C ... + 80 °C

Climate resistance:

During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

Shock resistance:

According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

Vibration resistance:

According to IEC 60068-2-6: 10 ... 500 Hz: 5 g

CERTIFICATE**REACH:**

REACH compliant

RoHS:

RoHS compliant

OTHER**Housing material:**


Metal


Short Description:

Actuator, Ø 22.3 mm, Ø 29.5 mm, round, Silver, Metal, Maintained - Rest (a) - Maintained, IP66, IP67, IP69K

Hints:

The standard lock: RONIS, T254

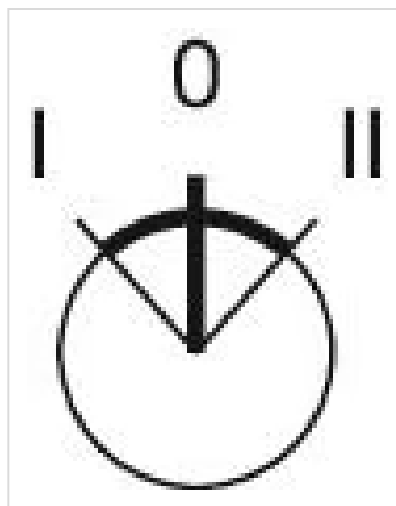Wiring diagrams:**Switching positions:****Dimension drawings:**

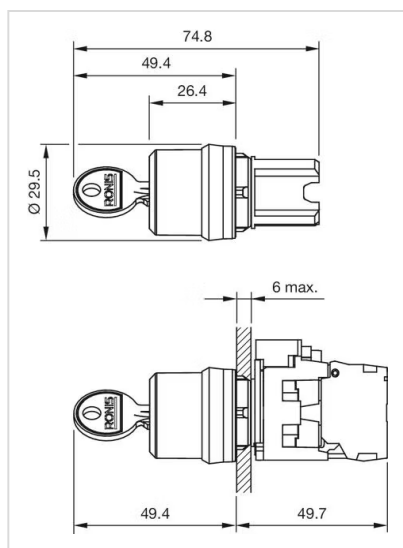

Mounting cut-outs:

