
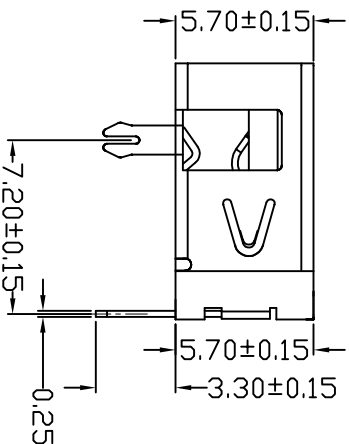
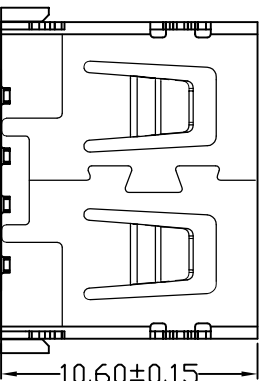
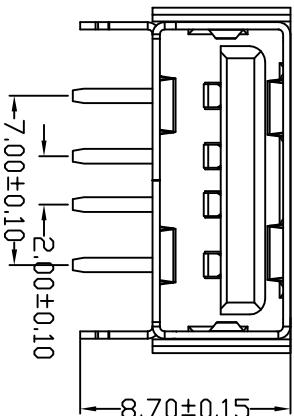


D款，正向10.6前两脚，DIP-*5.70

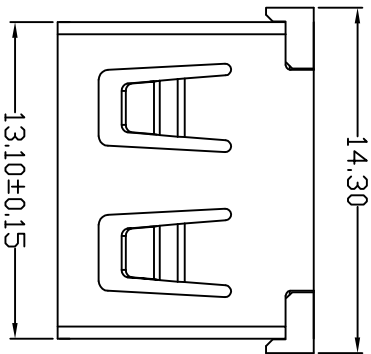


NOTES:
1. HOUSING: SEE NOTES, UL94V-0.
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:
1. ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2. MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN

3. ENVIRONMENTAL:
OPERATING TEMPERATURE: -55℃+85℃

4. Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

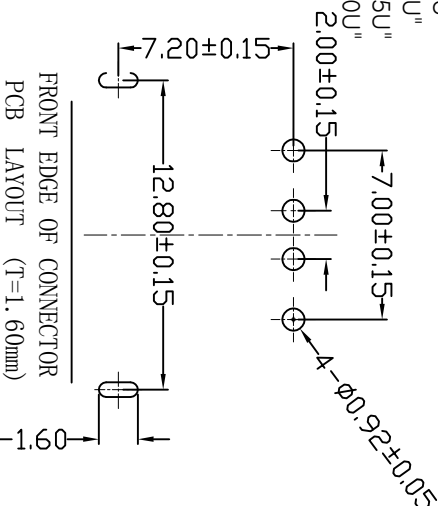

深圳市精拓金电子有限公司

产品图 PRODUCT CHART DWG				制图料号			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位	MM	制图	Z-Y-B
X	±0.25	X	±5°	UNITS		DRAWING	
X	±0.20	X	±2°	比例	1:1	审核	
XX	±0.15	XX	±1°	SCALE		CHKD	
XXX	±0.10	XXX	±0.5°	日期	2014.09.24	核准	
				DATE		APRD	
				产品名称	912-121A101 4D10100	版本	AD
				角法	☉	VER	
				VIEW			