

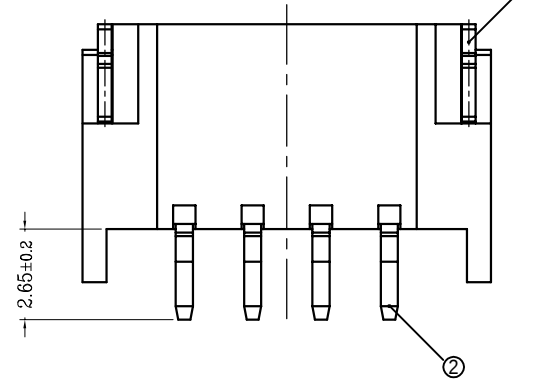
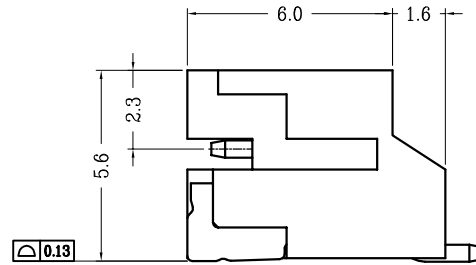
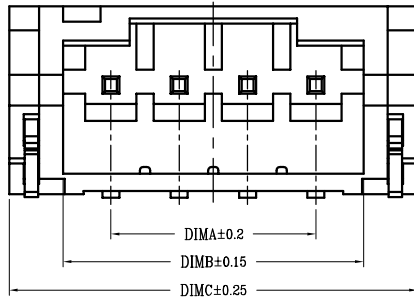
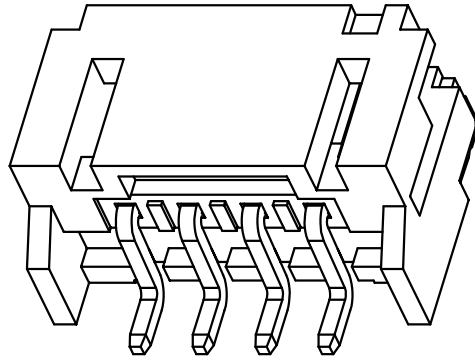


技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: $-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$ 。
3. 额定电压: 200V, AC。
4. 接触电阻: $\leq 55\text{m}\Omega$ (Initial) per contact, $\leq 25\text{m}\Omega$ Change allowed。
5. 绝缘电阻: $\geq 1000\text{M}\Omega$ 。

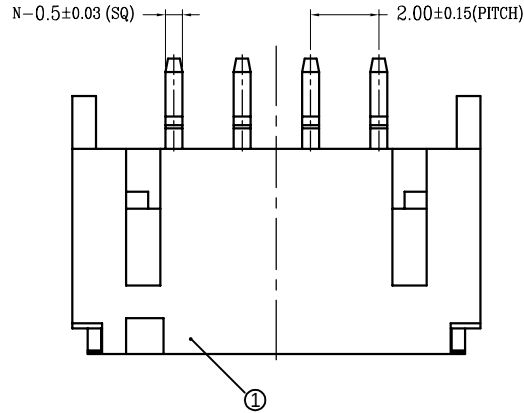

适用线路板

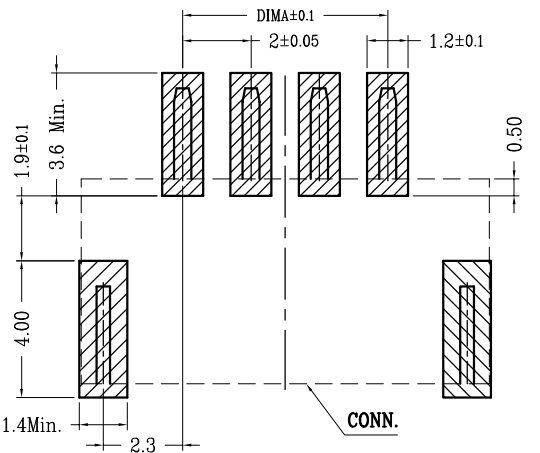

序号	品名	材质
①	2.00 F型卧式WTB胶芯	LCP UL94V-0 本色
②	2.00 F型立式WTB端子	铜合金/表面镀锡
③	2.00 F型卧式WTB焊片	铜合金/表面镀锡

CKT	DIM A	DIM B	DIM C
2	2.00	4.80	7.95
3	4.00	6.80	9.95
4	6.00	8.80	11.95
5	8.00	10.80	13.95
6	10.00	12.80	15.95
7	12.00	14.80	17.95
8	14.00	16.80	19.95
9	16.00	18.80	21.95
10	18.00	20.80	23.95
11	20.00	22.80	25.95
12	22.00	24.80	27.95
13	24.00	26.80	29.95
14	26.00	28.80	31.95
15	28.00	30.80	33.95
16	30.00	32.80	35.95
17	32.00	34.80	37.95
18	34.00	36.80	39.95
19	36.00	38.80	41.95
20	38.00	40.80	43.95



深圳市万骏达电子有限公司
<http://www.wanjunda.com>

图号 (DWG NO)		单位 (UNIT): MM
版本 (REV)		比例 (SCALE) 1:1
日期 (DATE)		未注公差 TOLERANCE UNSPECIFIED
设计 (DESIGN)		X.X ±0.30
审核 (CHECKED)		X.XX ±0.20
核准 (APPROVED)		X.XXX ±0.10
		X" ±5°
		X.X" ±2°