


ADAPTOR N FEMALE - SMA FEMALE


R191.332.000

BULKHEAD TYPE - PANEL SEAL




Série : ADAPT

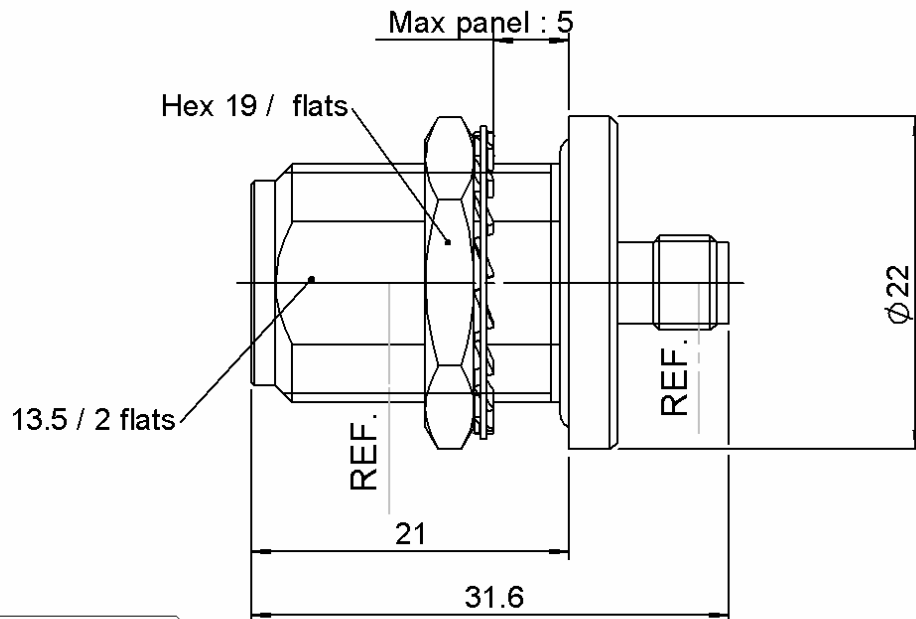

PANEL CUT OUT



	mm	
	Maxi	mini
A	16.1	16
B	13.7	13.6

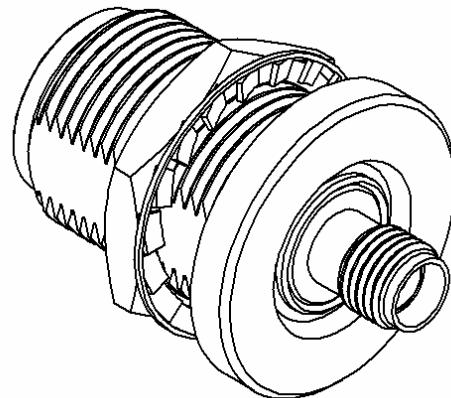

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING (μm)
BODY	BRASS	NICKEL
CENTER CONTACT	BERYLLIUM COPPER	GOLD
OUTER CONTACT	-	-
INSULATOR	PTFE	-
GASKET	SILICONE RUBBER	-
OTHERS PARTS	BRASS	NICKEL
-	-	-
-	-	-

Issue : 1125 P

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

RADIAL 

ADAPTOR N FEMALE - SMA FEMALE**R191.332.000****BULKHEAD TYPE - PANEL SEAL**

Série : ADAPT

PACKAGING

Standard	Unit	Other
1		Contact us

SPECIFICATION**QAE 06-02 - -****ELECTRICAL CHARACTERISTICS**

Impedance	50	Ω
Frequency	0-11	GHz
VSWR	1.20 + 0,0000	x F(GHz) Maxi
Insertion loss	TBD	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	- (101)	- F(GHz)) dB Maxi
Voltage rating	500	Veff Maxi
Dielectric withstanding voltage	1000	Veff mini
Insulation resistance	5000	M Ω mini

ENVIRONMENTAL

Operating	-55/+155	$^{\circ}\text{C}$
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	27	N mini
Axial force – Opposite end	27	N mini
Torque	NA	N.cm mini

Recommended torque

Mating	N	0	N.cm
	SMA	0	N.cm
	-	0	N.cm
Panel nut		500	N.cm

Mating life	500	Cycles mini
Weight	40,0000	g

OTHER CHARACTERISTICS**Issue : 1125 P**

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

RADIAL 