


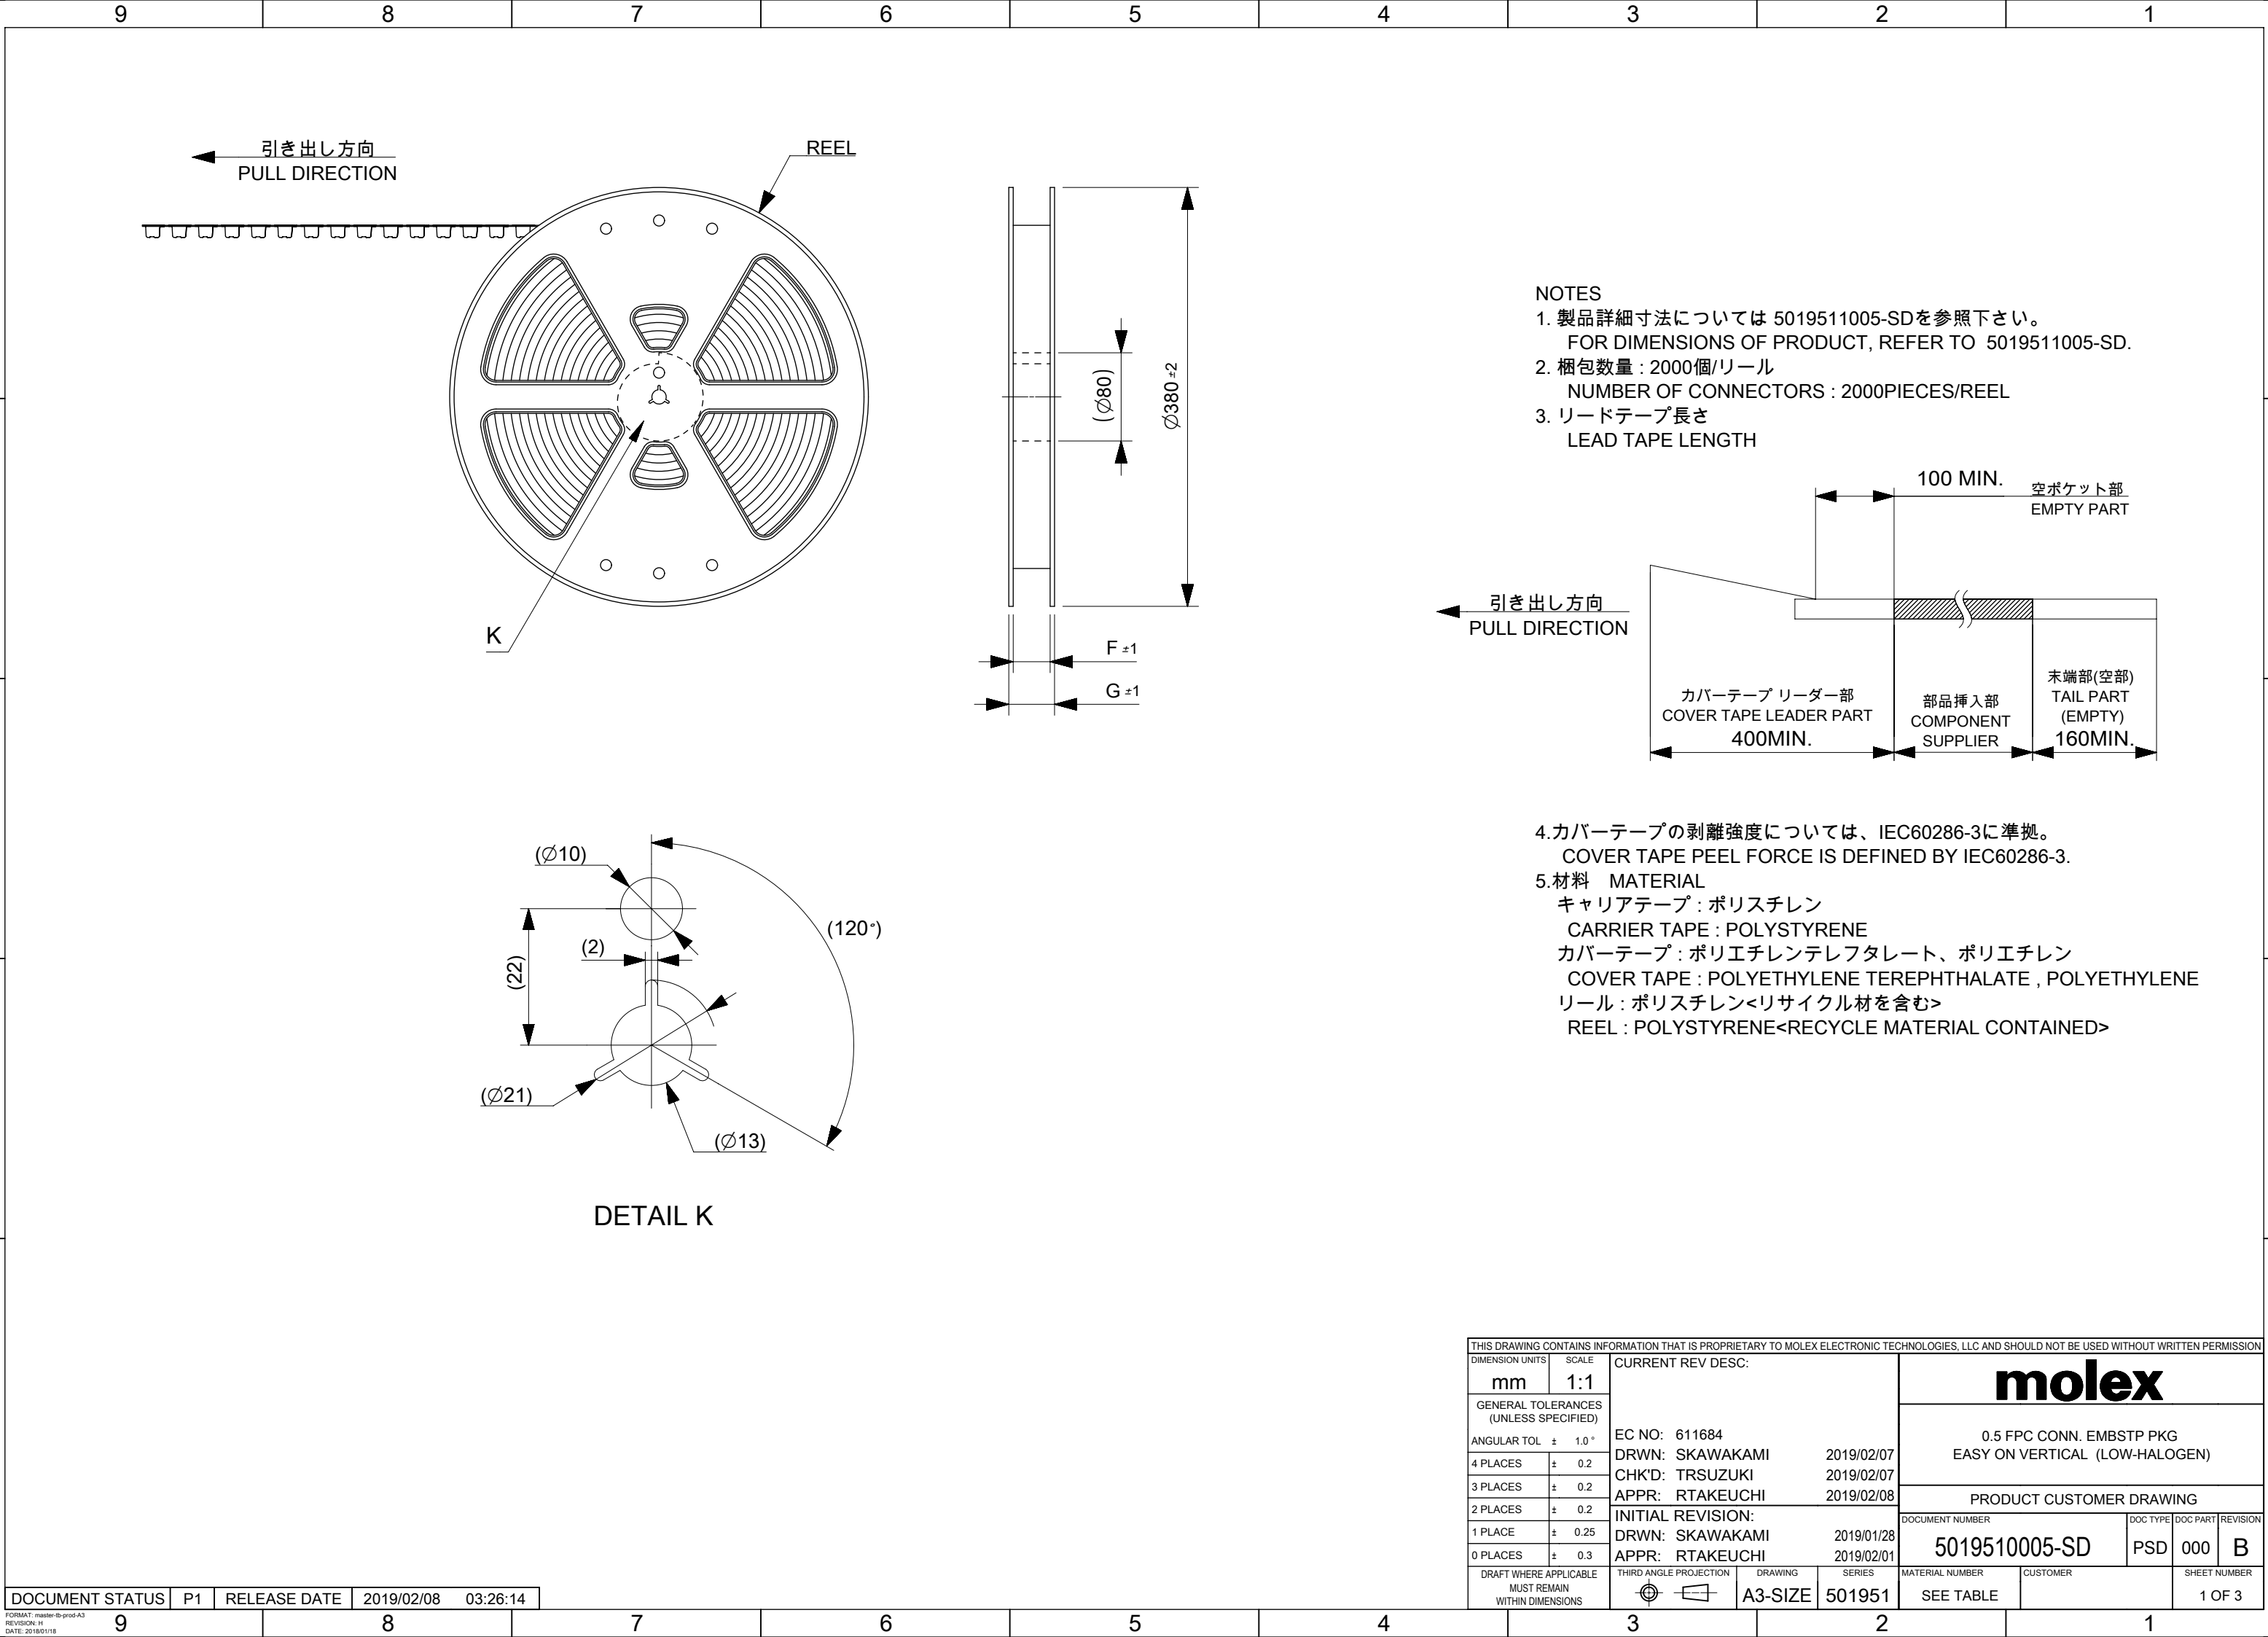


NOTES

1. 製品詳細寸法については 5019511005-SDを参照下さい。
FOR DIMENSIONS OF PRODUCT, REFER TO 5019511005-SD.

2. 梱包数量 : 2000個/リール
NUMBER OF CONNECTORS : 2000PIECES/REEL


3. リードテープ長さ
LEAD TAPE LENGTH

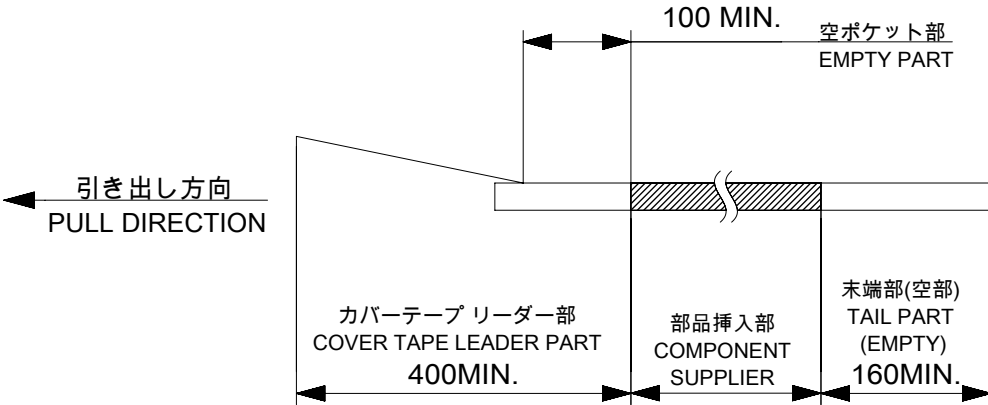





- 4.カバーテープの剥離強度については、IEC60286-3に準拠。
COVER TAPE PEEL FORCE IS DEFINED BY IEC60286-3.
- 5.材料 MATERIAL
キャリアテープ : ポリスチレン
CARRIER TAPE : POLYSTYRENE
カバーテープ : ポリエチレンテレフタレート、ポリエチレン
COVER TAPE : POLYETHYLENE TEREPHTHALATE , POLYETHYLENE
リール : ポリスチレン<リサイクル材を含む>
REEL : POLYSTYRENE<RECYCLE MATERIAL CONTAINED>

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
DIMENSION UNITS		SCALE		
mm		1:1		
GENERAL TOLERANCES (UNLESS SPECIFIED)				
ANGULAR TOL		±	1.0 °	
4 PLACES		±	0.2	
3 PLACES		±	0.2	
2 PLACES		±	0.2	
1 PLACE		±	0.25	
0 PLACES		±	0.3	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				
DOCUMENT STATUS	P1	RELEASE DATE	2019/02/08	03:26:14


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE			CURRENT REV DESC:			molex			
mm		1:1									
GENERAL TOLERANCES (UNLESS SPECIFIED)					EC NO: 611684 DRWN: SKAWAKAMI2019/02/07 CHK'D: TRSUZUKI2019/02/07 APPR: RTAKEUCHI2019/02/08 INITIAL REVISION: DRWN: SKAWAKAMI2019/01/28 APPR: RTAKEUCHI2019/02/01			0.5 FPC CONN. EMBSTP PKG EASY ON VERTICAL (LOW-HALOGEN)			
ANGULAR TOL		±	1.0 °								
4 PLACES		±	0.2								
3 PLACES		±	0.2								
2 PLACES		±	0.2								
1 PLACE		±	0.25								
0 PLACES		±	0.3								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					THIRD ANGLE PROJECTION		DRAWING		SERIES		
				A3-SIZE		501951		MATERIAL NUMBER		CUSTOMER	
				SEE TABLE				SHEET NUMBER			
								1 OF 3			

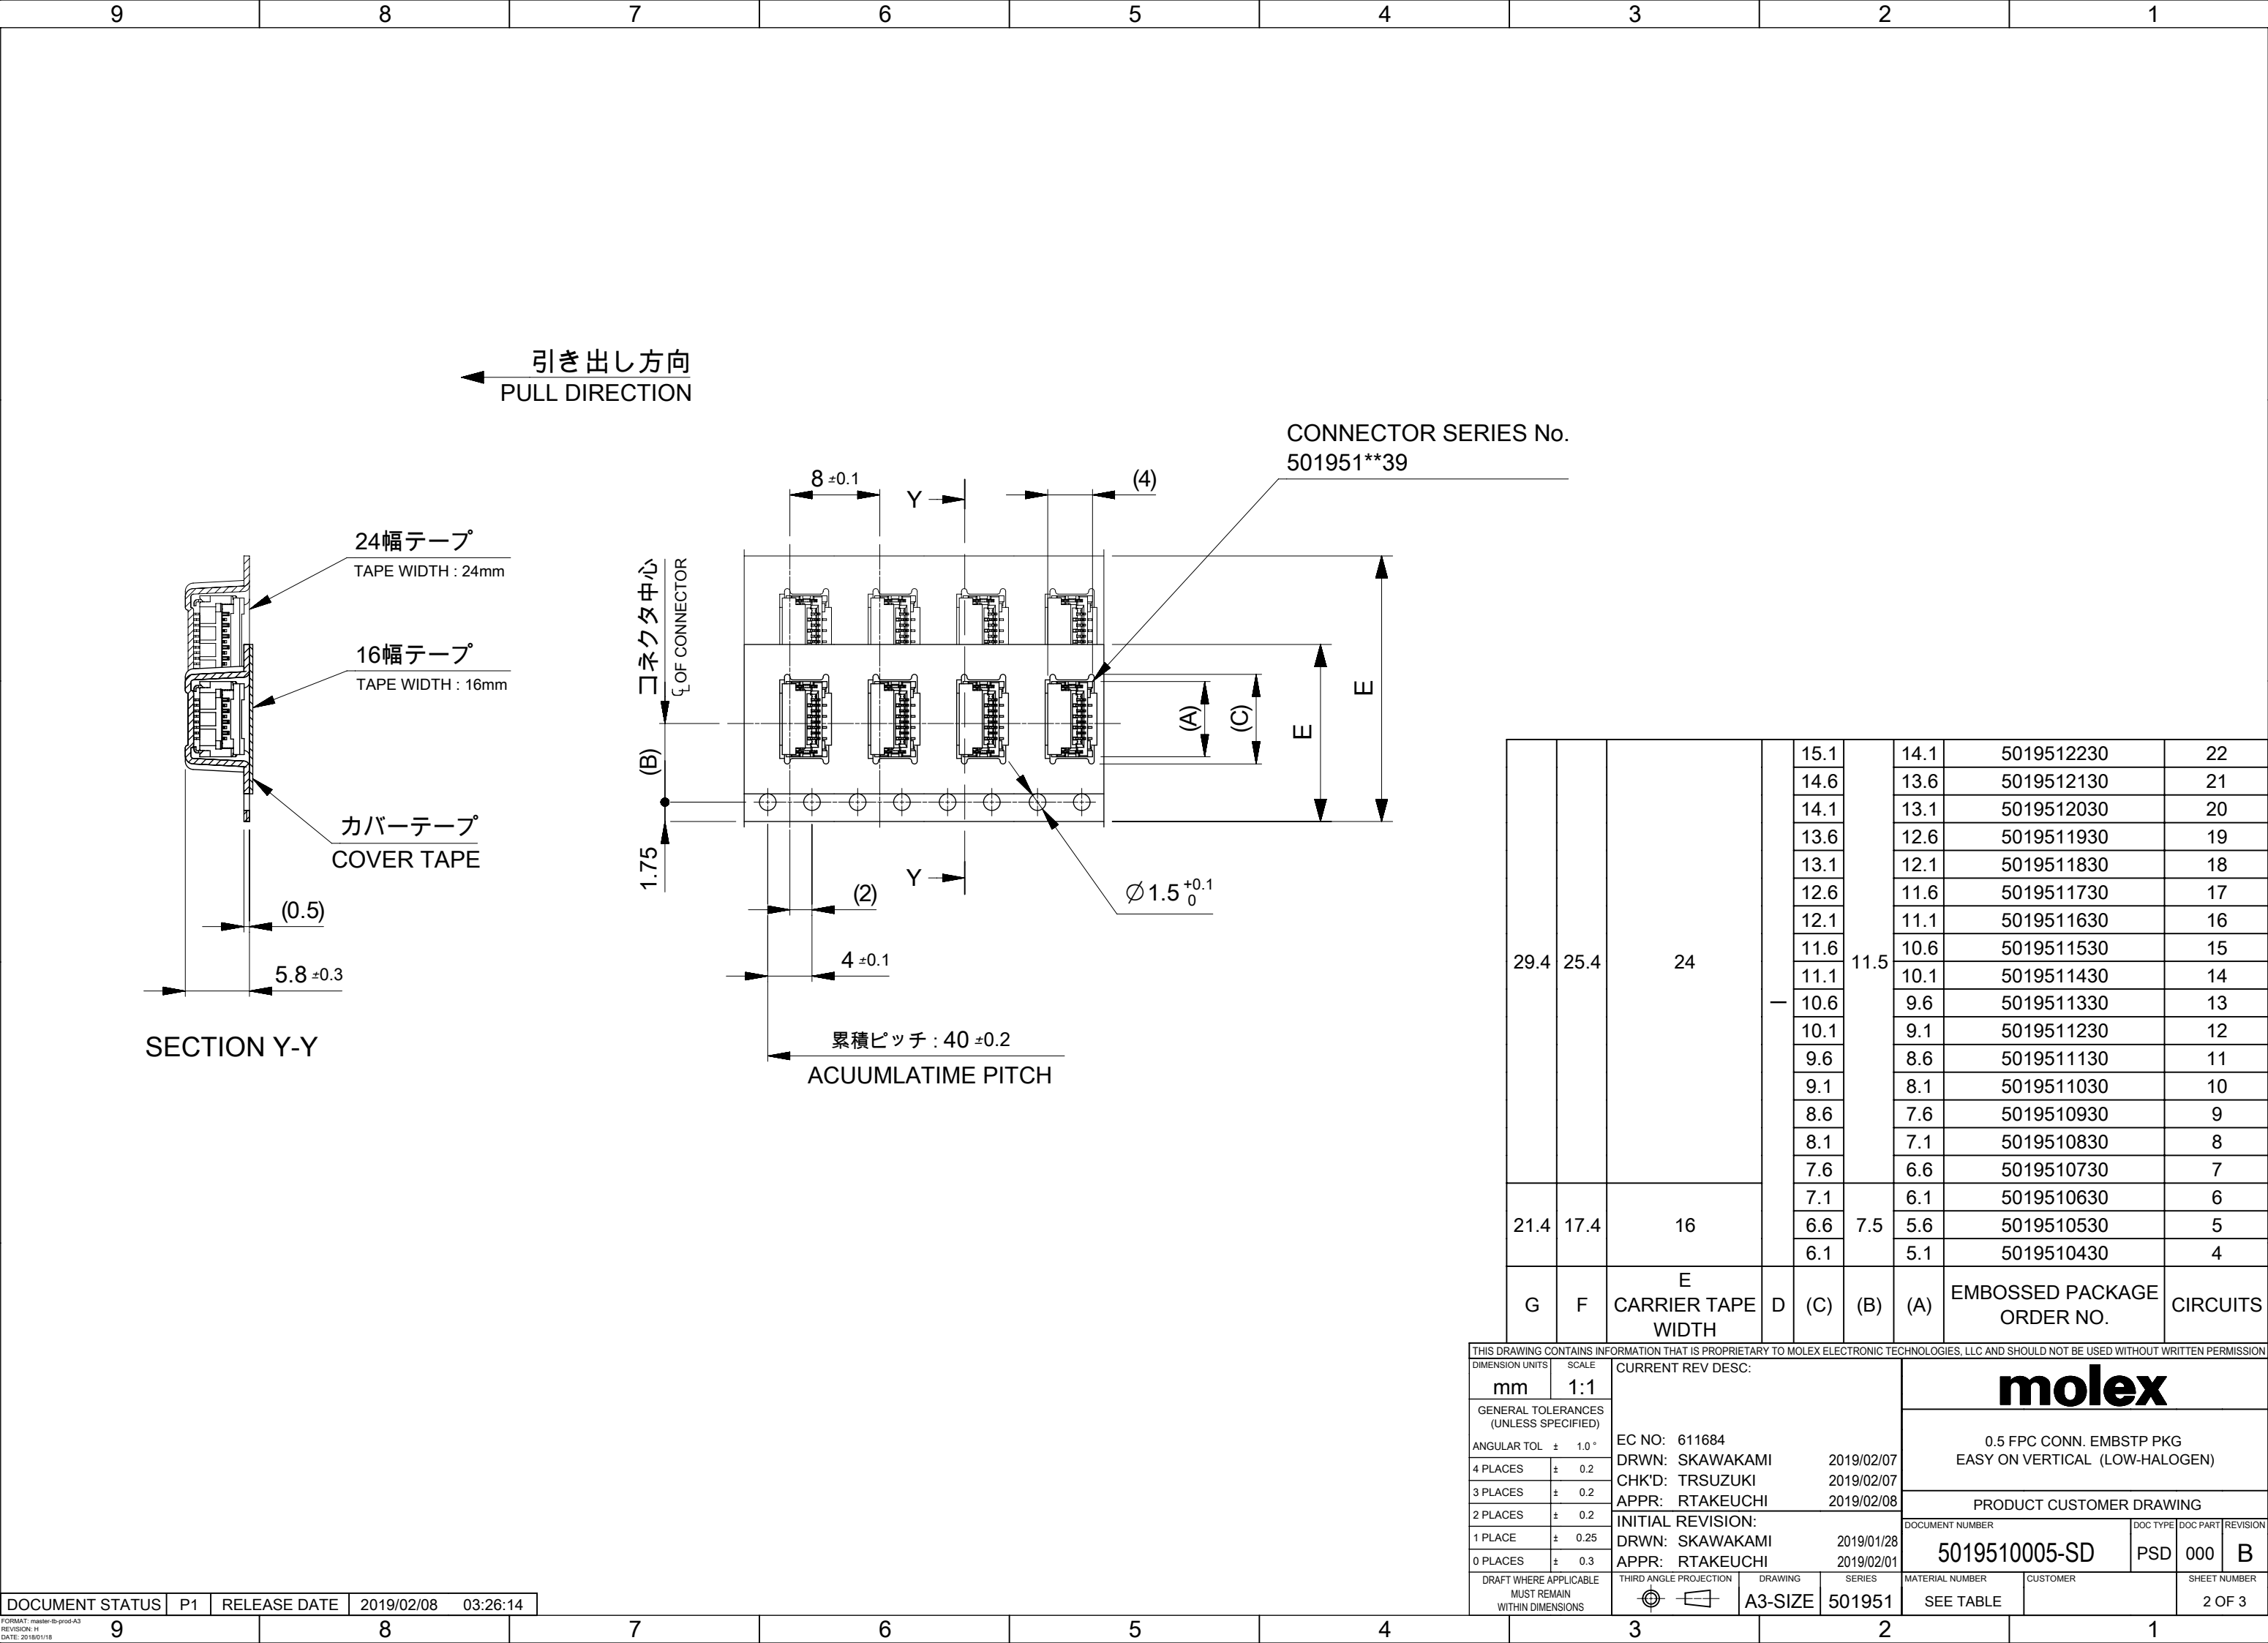

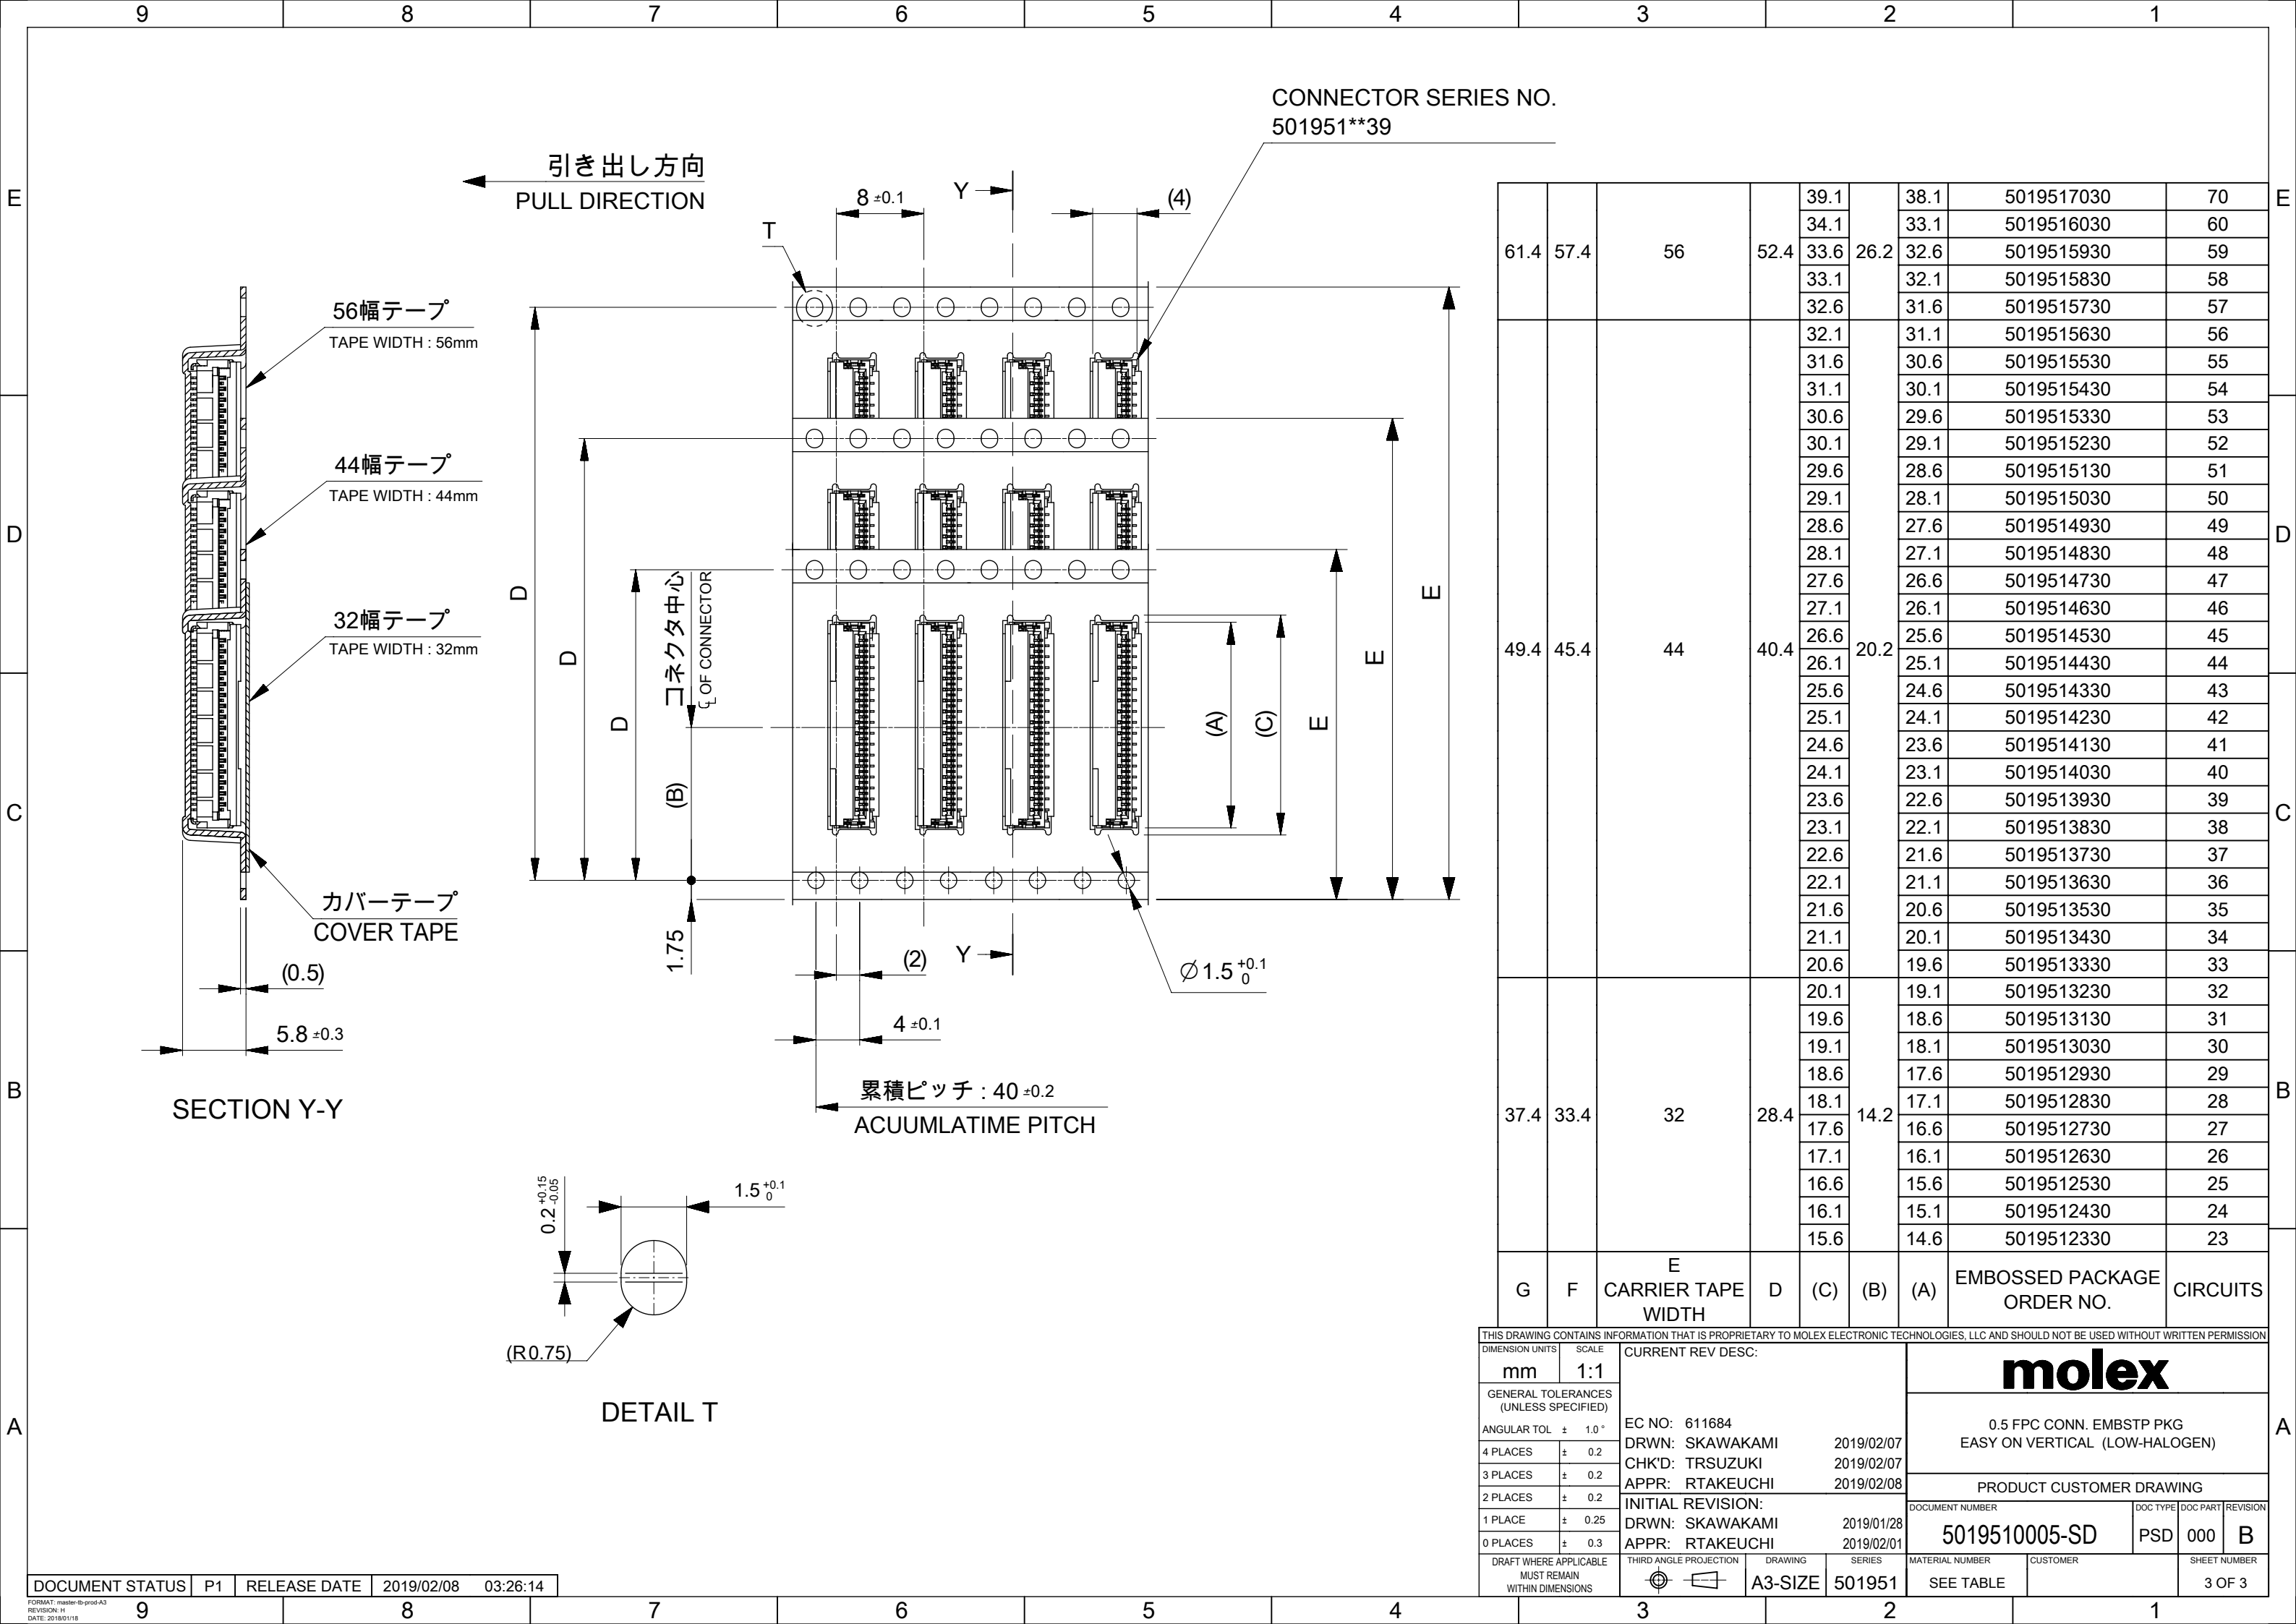

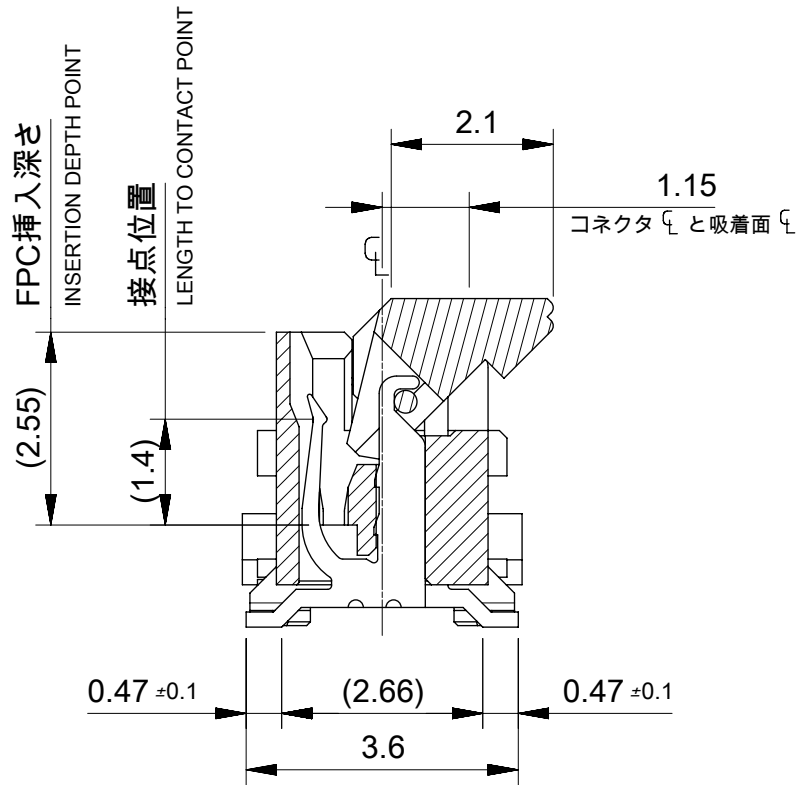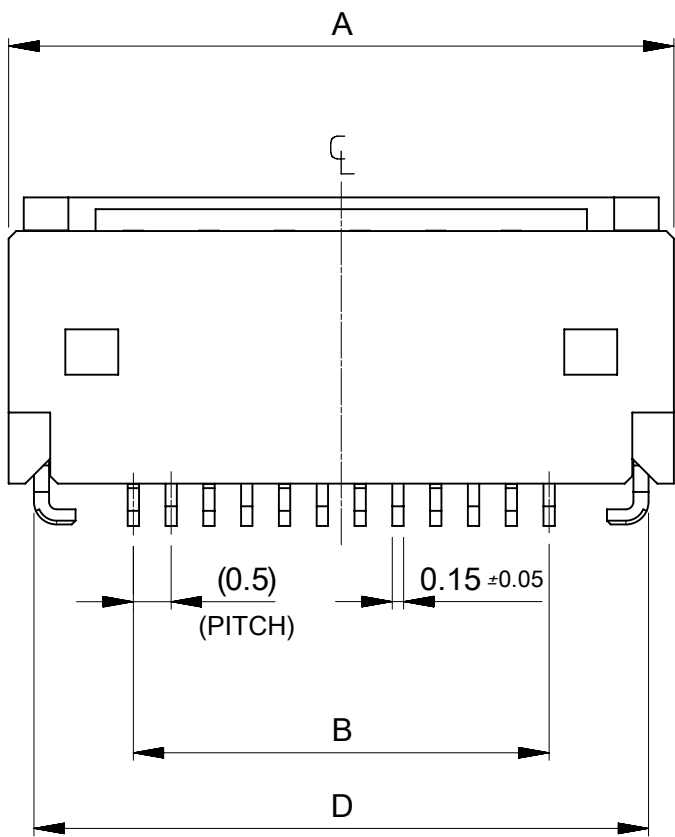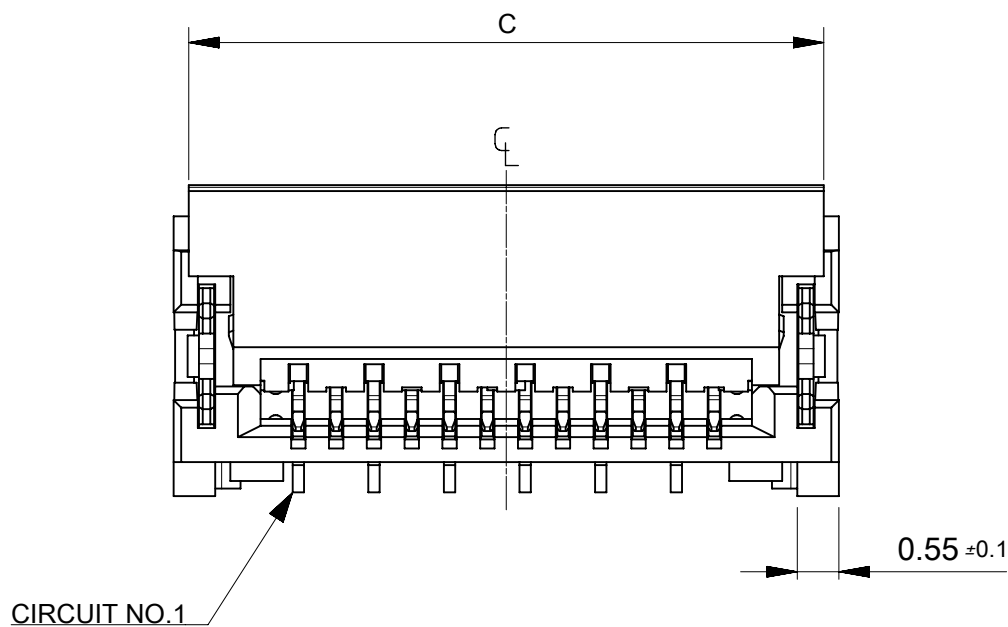

断面図 (参考)

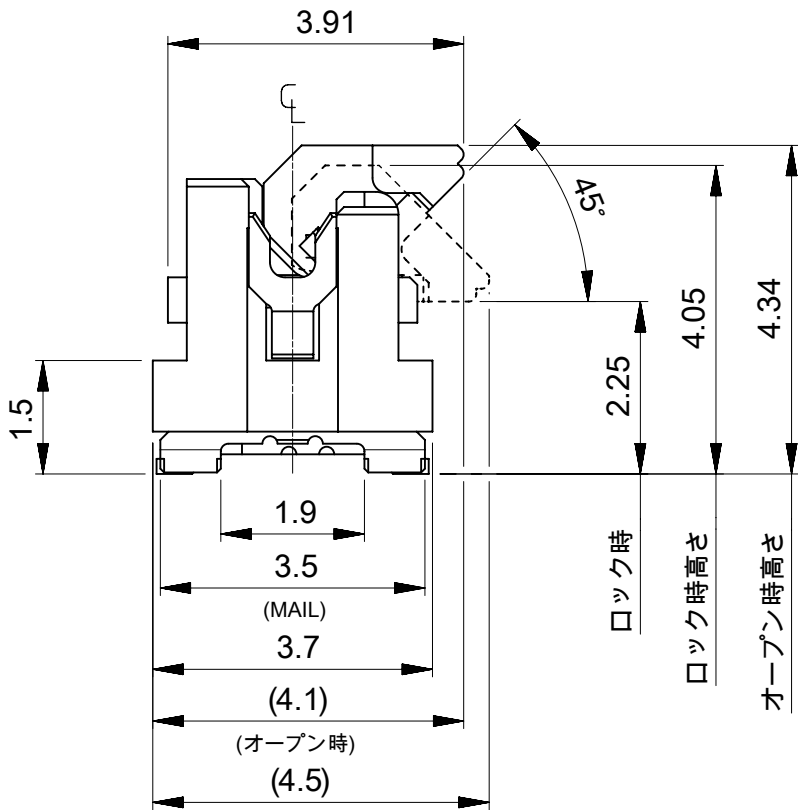

7.7	9.1	9.4	6.5	9.8	5019511430	14
7.2	8.6	8.9	6	9.3	5019511330	13
6.7	8.1	8.4	5.5	8.8	5019511230	12
6.2	7.6	7.9	5	8.3	5019511130	11
5.7	7.1	7.4	4.5	7.8	5019511030	10
5.2	6.6	6.9	4	7.3	5019510930	9
4.7	6.1	6.4	3.5	6.8	5019510830	8
4.2	5.6	5.9	3	6.3	5019510730	7
3.7	5.1	5.4	2.5	5.8	5019510630	6
3.2	4.6	4.9	2	5.3	5019510530	5
2.7	4.1	4.4	1.5	4.8	5019510430	4
E	D	C	B	A	EMBOSSED TAPE ORDER NO.	CIRCUITS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex									
mm		10:1															
GENERAL TOLERANCES (UNLESS SPECIFIED)				0.5 FPC CONN. HSG ASSY EASY ON VERTICAL (LOW-HALOGEN)													
ANGULAR TOL ± 1.0 °																	
4 PLACES		± 0.2															
3 PLACES		± 0.2															
2 PLACES		± 0.2															
1 PLACE		± 0.2		PRODUCT CUSTOMER DRAWING													
0 PLACES		± 0.2															
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				EC NO: 611684													
				DRWN: SKAWAKAMI 2019/02/07													
				CHK'D: TRSUZUKI 2019/02/07													
				APPR: RTAKEUCHI 2019/02/08													
				INITIAL REVISION:													
				DRWN: SKAWAKAMI 2018/11/26													
				APPR: RTAKEUCHI 2019/02/01													
				THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
						A3-SIZE		501951		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER			
								5019511005-SD		PSD		000		B			
								SEE CHART				1 OF 4					

DOCUMENT STATUS	P1	RELEASE DATE	2019/02/08	03:26:20
-----------------	----	--------------	------------	----------

CONNECTOR SERIES NO.	501951**39
----------------------	------------

