

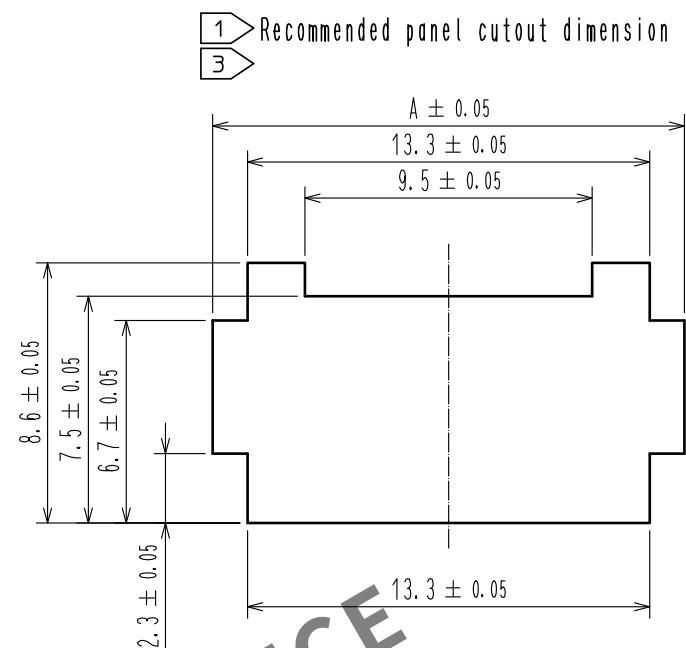
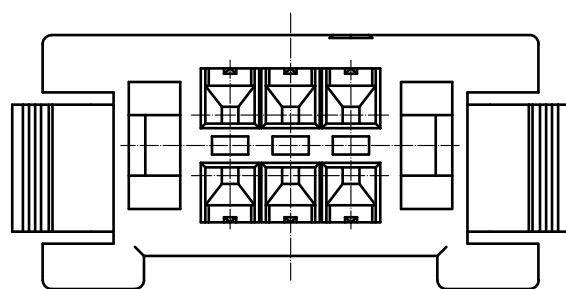


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

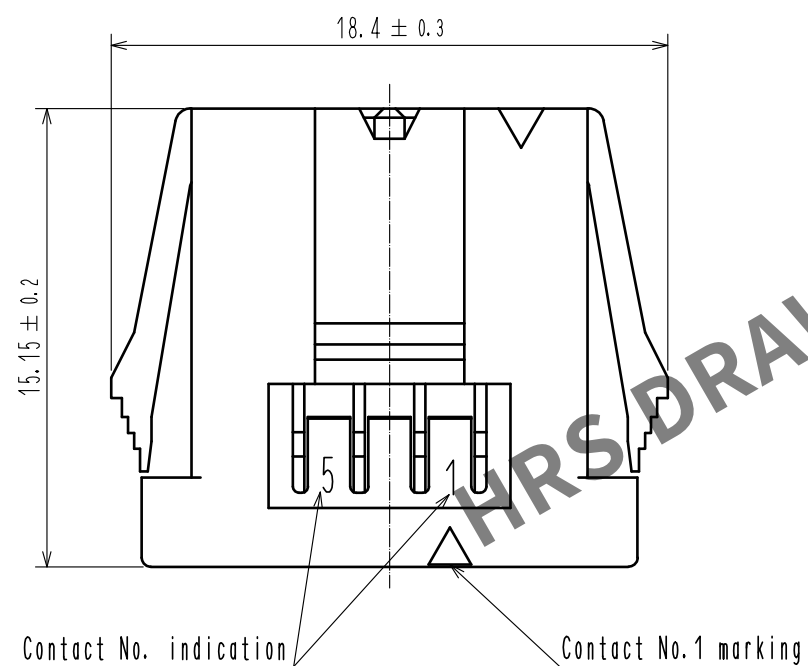

Panel thickness	A
0.5~0.8	15.6
0.9~1.3	16.1
1.4~1.8	16.5
1.9~2.3	16.9

- Note 1 Please use non-radius side for the panel hooking area.
2 Applicable panel thicknessing is 2.3 to 0.5 mm.
3 Consult hirose for the other panel cutout designs than recommended one.
4. Per pack : 100 pieces.
5. UL(File No.E52653),
C-UL(File No.E52653) authorization article.

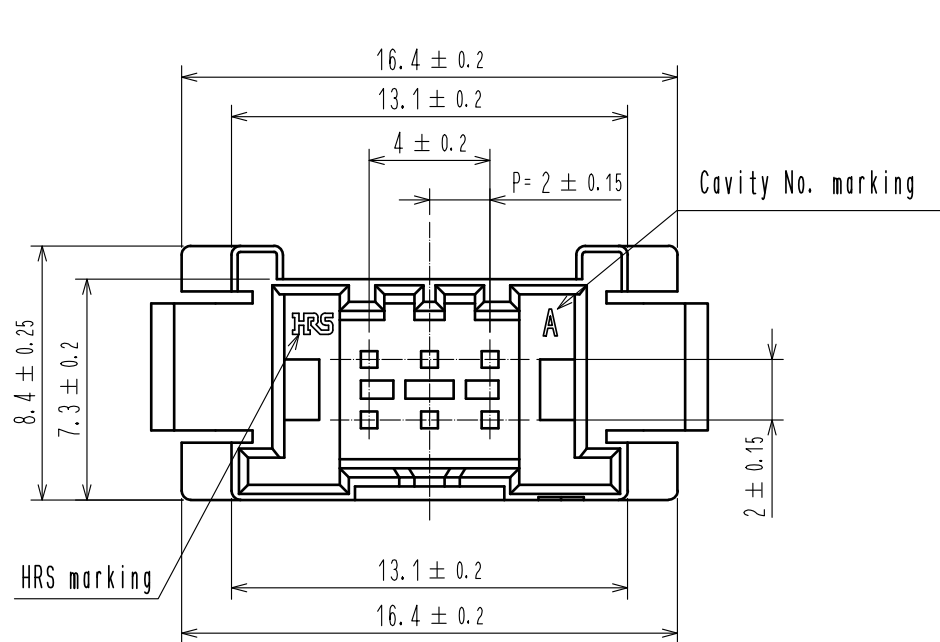

NO.				1				PBT				UL94V-0, BLACK			
MATERIAL				FINISH . REMARKS				MATERIAL				FINISH . REMARKS			
UNITS				SCALE				COUNT				DESCRIPTION OF REVISIONS			
mm				4 : 1				1				DIS-H-00004537			
HRS				HIROSE ELECTRIC CO., LTD.				APPROVED : HS. OKAWA				20160601			
								CHECKED : YN. TAKASHITA				20160601			
								DESIGNED : TT. OHSAKO				20160601			
								DRAWN : TT. OHSAKO				20160601			
								DRAWING NO.				EDC-366283-00-00			
								PART NO.				DF51-6DEP-2C			
								CODE NO.				CL543-5072-0-00			