

# Actuator

92-  
358.700

Distribution by  
DigiKey

**DigiKey**



<https://digikey.eao.com/p/92-358.700>

Your product:



# 92-358.700 Actuator

Loading ..

## FRONT

|                       |                   |
|-----------------------|-------------------|
| Front bezel colour:   | White             |
| Front dimension:      | 18,4 mm x 18,4 mm |
| Front form:           | square            |
| Front bezel material: | Plastic           |

## MOUNTING

|         |     |
|---------|-----|
| Design: | PCB |
|---------|-----|

## OPERATING-/INDICATION PART

|                      |              |
|----------------------|--------------|
| Lens material:       | Plastic      |
| Lens illumination:   | illuminative |
| Lens colour:         | Colourless   |
| Lens optics:         | transparent  |
| Illumination colour: | White        |
| Lens shape:          | flush        |

## ELECTRICAL CHARACTERISTICS

|  |  |                                       |
|--|--|---------------------------------------|
| Electric strength:                       | 500 VAC, 50 Hz, 1 minute according to IEC 60512-5-9c |                                       |
| Electrostatic discharge (ESD):           | 15 kV  |                                       |
| Switching voltage and switching current: | Switching voltage                                    | min. 50 m VAC/DC<br>max. 42 VAC/DC    |
|  | Switching current                                    | min. 10 µA AC/DC<br>max. 100 mA AC/DC |
|  | Power rating   | max. 2 W                              |
|  |  |                                       |
| Electrical lifetime:                     |  |                                       |

500 000 cycles of operation at 42VDC, 50mA, according to IEC 6512-5-9c

## MECHANICAL CHARACTERISTIC

|                             |   |
|-----------------------------|---|
| <b>Mechanical lifetime:</b> | ≥1 Mio. cycles of operation   |
| <b>Switching system:</b>    | Short-travel switching system with 2 independent contact points<br>Guarantees reliable switching even of very light loads. Fitted with 1 normally open contact. |
| <b>Operating force:</b>     | 2.7 N ±1 N switching element, 5 N lens  |
| <b>Weight:</b>              | 0.003 kg  |
| <b>Switching action:</b>    | Momentary   |
| <b>Operating Travel:</b>    | ca. 0.4 mm switching element  |
| <b>Switching system:</b>    | Short-travel element  |
| <b>Tightening torque:</b>   | Fixing nut max. 0.5 Nm, Fixing screw mounting flange 0.4 Nm   |

## AMBIENT CONDITION


|                               |  |
|-------------------------------|--|
| <b>IP Protection:</b>         | IP40 front side  |
| <b>Storage temperature:</b>   | – 40 °C ... + 80 °C  |
| <b>Operating temperature:</b> | – 25 °C ... + 70 °C  |
| <b>Vibration resistance:</b>  | Max. 100 m / s <sup>2</sup> from 10 Hz ... 500 Hz, 10 cycles, 3-axis (sinusoidal EN IEC 60068-2-6) |
| <b>Shock resistance:</b>      | Max. 500 m/s <sup>2</sup> , pulse width, 3-axis (sinusoidal EN IEC 60068-2-27)                     |

## CERTIFICATE


|                      |   |
|----------------------|---|
| <b>Approbations:</b> | CQC   |
| <b>Conformities:</b> | CE, UKCA, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD) |

## OTHER

|                            |  |
|----------------------------|--|
| <b>Short Description:</b>  | Actuator, 18,4 mm x 18,4 mm, flush, illuminative, Colourless, Plastic, transparent, square, White, Plastic, Momentary, White |
| <b>Housing material:</b>   | Plastic  |
| <b>Dimension:</b>          | 18.4 mm x 18.4 mm  |
| <b>Housing colour:</b>     | White  |
| <b>Dimension drawings:</b> |  |

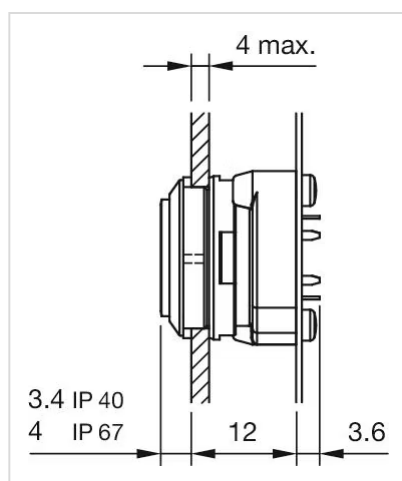

**Wiring diagrams:**

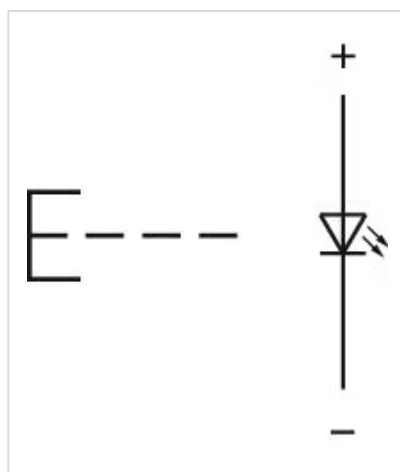

**Mounting cut-outs:**

