

E 款, 反向10.6四脚, SMT-*6.20

MAPX

MODIFICATION

DATE

NOTES:

- 1.HOUSING: SEE NOTES, UL94V-0 .
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:




- 1.ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30M Ω MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000M Ω MIN
2.MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE:3~35N

3.ENVIRONMENTAL:

OPERATING TEMPERATURE: -55℃+85℃

4.Contact finish:

- 01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

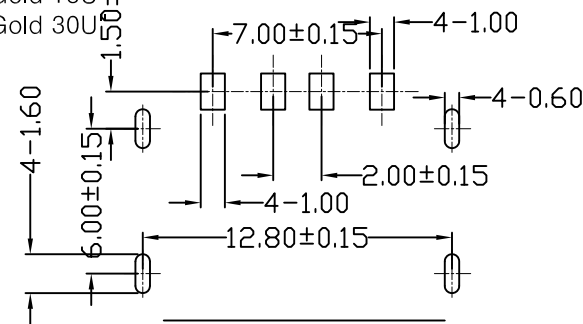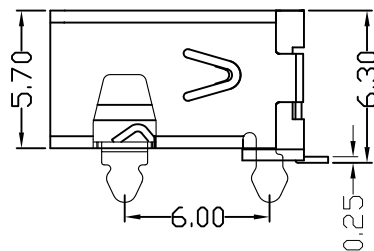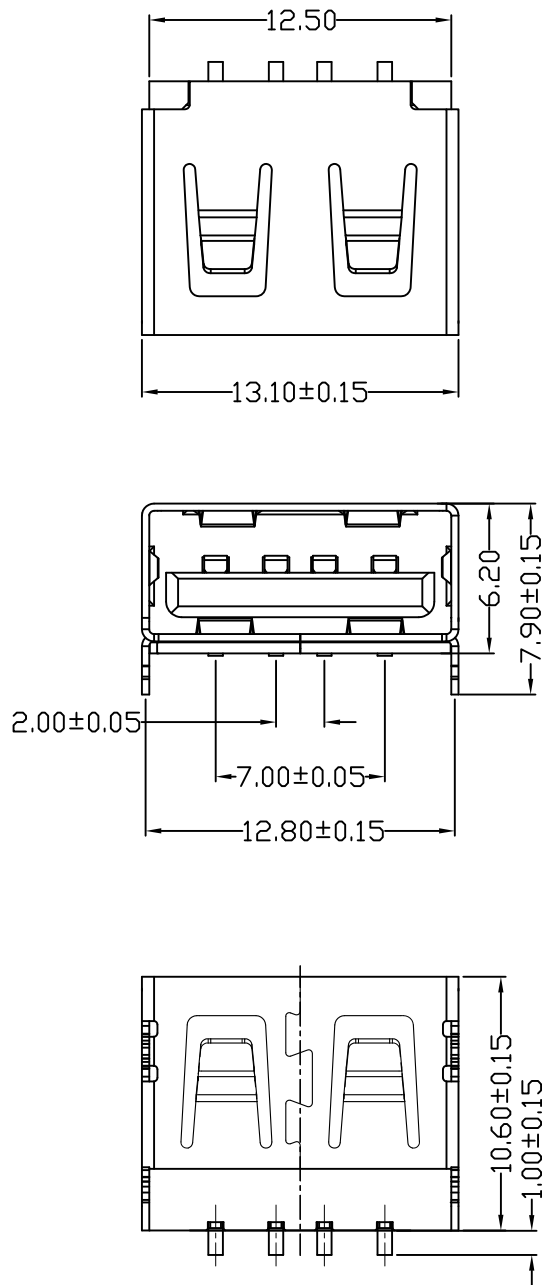

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

单位	MM	制图	Z-Y-B	制图料号	913-361B2025S10100
比例	1:1	审核		产品名称	AF10.6E款四脚无边方弹壳反向一型LCP黑胶SMT
日期	2015.03.10	核准		角法	版本
DATE	2015.03.10	APPD		VIEW	VER

深圳市精拓金电子有限公司

单位

MM

制图

Z-Y-B

制图料号

913-361B2025S10100

比例

1:1

审核

产品名称

AF10.6E款四脚无边方弹壳反向一型LCP黑胶SMT

日期

2015.03.10

核准

角法

版本

AD

DATE

2015.03.10

APPD

VIEW

VER

AD