

D

C

B




A

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION
© COPYRIGHT — By —	ALL RIGHTS RESERVED.


LOC J	DIST —	REVISIONS 变更					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			F	REVISED ECR-14-018500	18DEC2014	TS	YF

WIRE RANGE ID MARK
("M" SIZE MARK)
(STAMPED ON BOTTOM)


端子識別マーク "M"
(底面に刻印)

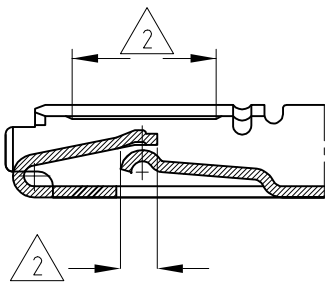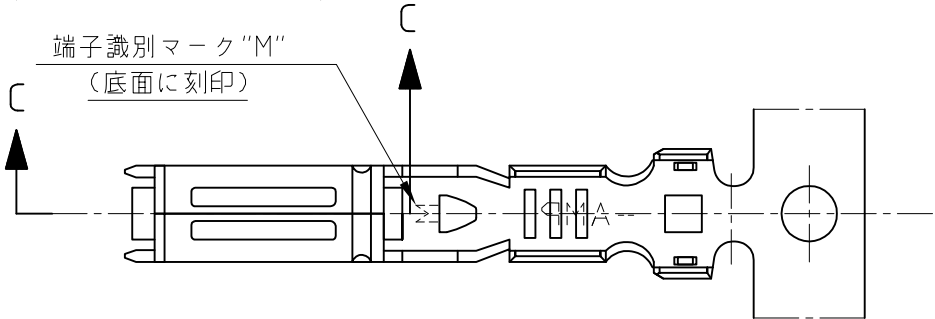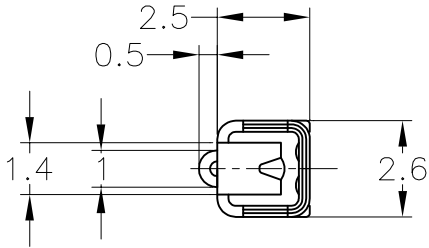


断面 C-C
SECT C-C




断面 A-A
SECT A-A

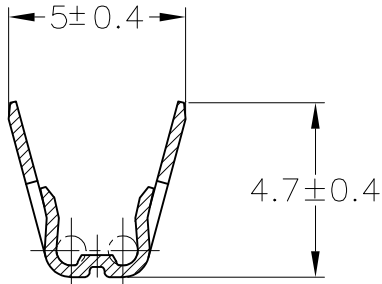

断面 B-B
SECT B-B



断面 A-A
SECT A-A
(175027のみ適用)
(ONLY 175027)

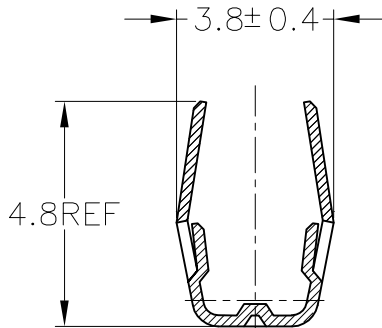


断面 B-B
SECT B-B
(175027のみ適用)
(ONLY 175027)

- 1 製品規格 ; 108-5216, 108-5231, 108-5264, 108-3371
- 2 部分金めっき
- 3 取付適用規格 ; 114-5091
- 4 識別用金めっき (全周)
- 5 部分金めっき (両側のみ)

- 1 SPEC; 108-5216, 108-5231, 108-5264, 108-3371
- 2 SELECTIVE GOLD PLATING
- 3 APPLICATION SPEC; 114-5091
- 4 GOLD PLATING FOR DISCERNMENT (ALL AROUND)
- 5 SELECTIVE GOLD PLATING (ONLY BOTH SIDES OF THE BOX)

TOLERANCE UNLESS OTHERWISE SPECIFIED: 一般公差	
0<x≤ 10	±0.2
10<x≤ 30	±0.25
30<x≤ 100	±0.3
ANGLE	±3°

WIRE RANGE 0.5~1.25mm ² (AWG#20~#16)		INSULATION DIA. 2~2.6mmφ		PRE-TINNED 仕上 FINISH		BRASS F03 材料 MATERIAL		TYPE 型番 PART NUMBER					
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN M.SUGAWARA CHK T.SHINOHARA APVD K.BETSUI PRODUCT SPEC 製品規格 APPLICATION SPEC 取付適用規格 WEIGHT — CUSTOMER DRAWING		12MAY06 12MAY06 12MAY06							
DIMENSIONS: 単位： 耗 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		TE Connectivity									
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		070 SERIES RECEPTACLE CONTACT									
MATERIAL 材料 SEE TABLE		FINISH 仕上 SEE TABLE		SIZE A3		CAGE CODE 00779		DRAWING NO 番号 C-173631		RESTRICTED TO —			
								SCALE 尺度 5:1		SHEET 1 OF 1		REV F	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[173631-2 \(Mouser Reel\)](#) [173631-6 \(Loose Piece\)](#)