
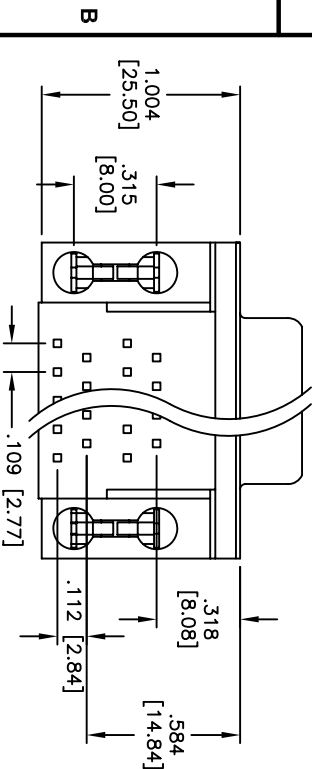
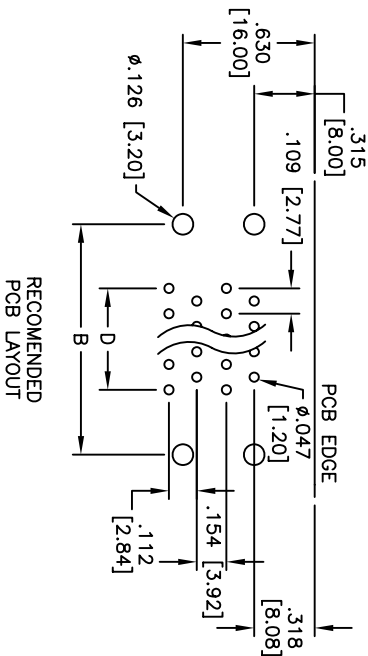
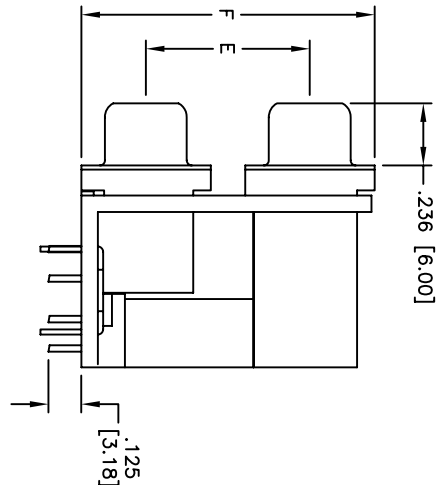


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/10/05	
A		REDREW	1/17/08	

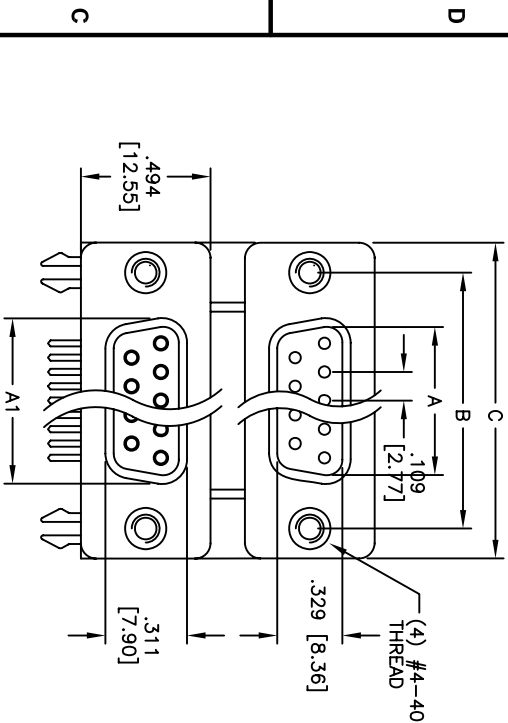

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shell: Steel, Zinc plated
Plating:
Gold flash over Nickel underplate overall

Electrical:
Operating voltage: 250 VAC max.

Current rating: 5 Amps max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 5,000 Mohms min.

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds

PORT SPACING	PLUG DIMENSIONS			
	A3	B3	C3	
A3	.900 [22.86]	.750 [19.05]	.625 [15.88]	
B3	.750 [19.05]	.625 [15.88]		
C3	.625 [15.88]			

POSITIONS	DIMENSIONS			
	A	A1	B	D
9	.666 [16.92]	.643 [16.33]	.984 [24.99]	1.213 [30.81]
15	.994 [25.25]	.971 [24.66]	1.312 [33.32]	1.541 [39.14]
25	1.534 [38.96]	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]
37	2.182 [55.42]	2.160 [54.84]	2.500 [63.50]	2.729 [69.32]

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

DUAL PORT D-SUB, MALE / FEMALE
FORGED BOARDLOCKS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES .X ±.10 ØXX ±.10 .XX ±.020 ØXX ±.015 .XXX ±.015 ØXXX ±.010				TITLE DUAL PORT D-SUB, MALE / FEMALE FORGED BOARDLOCKS			
DRAWN	SS	6/10/05	SIZE	PART NO.	REV.		
CHECKED			X	DPD-XX-10-X3-125	A		
APPROVED			REF:	SCALE: NTS	SHEET 1 OF 1		

ROHS
COMPLIANT