

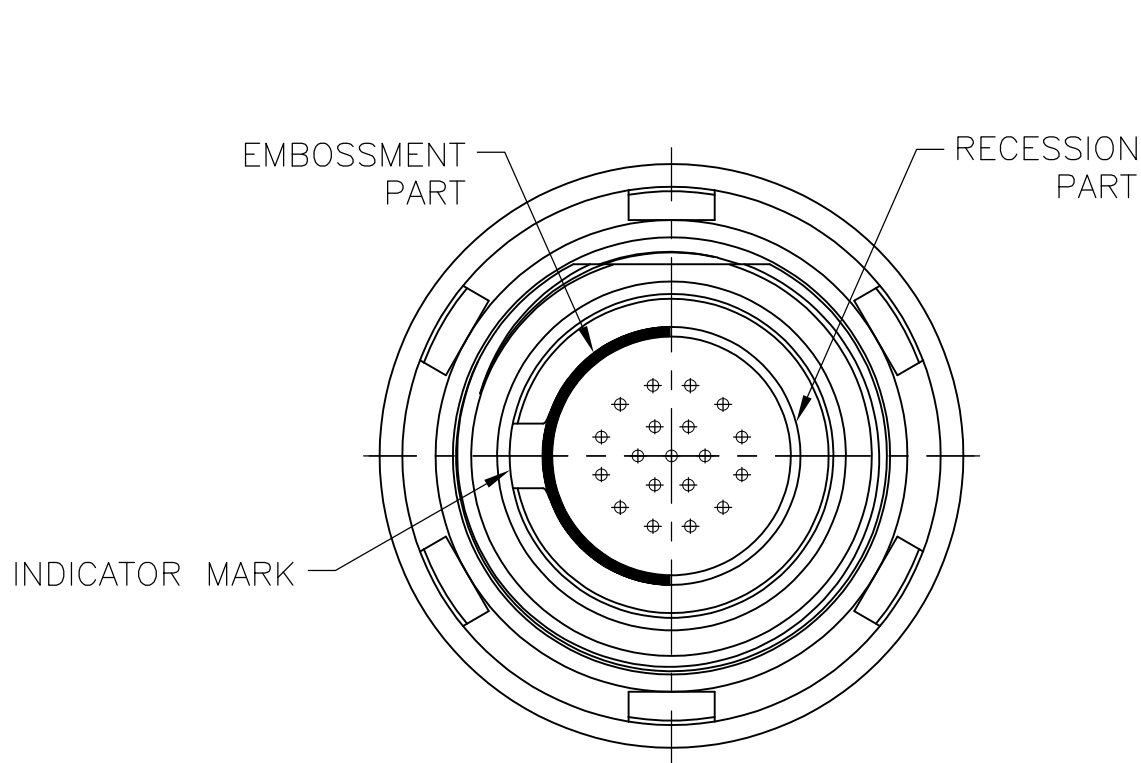


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
-	-	C		REVISED PER ECO 13-001843.	08FEB2013	MGM CT

D

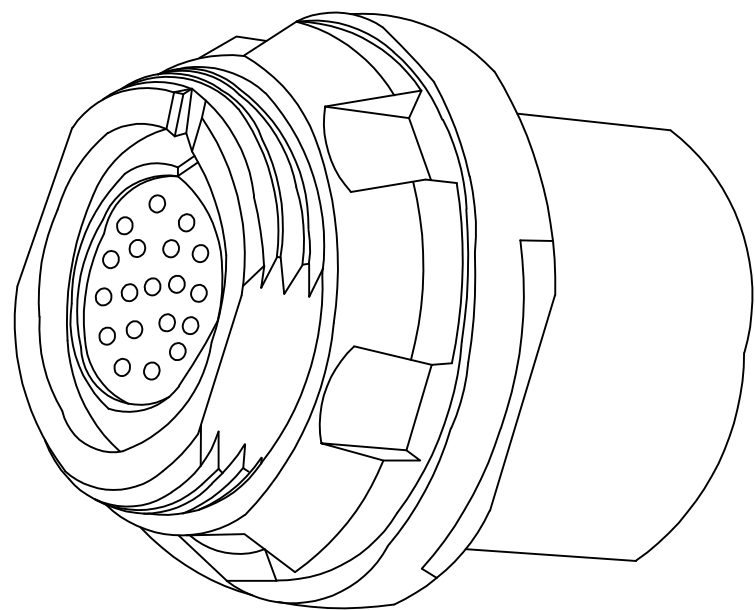

SINGLE POLARIZATION

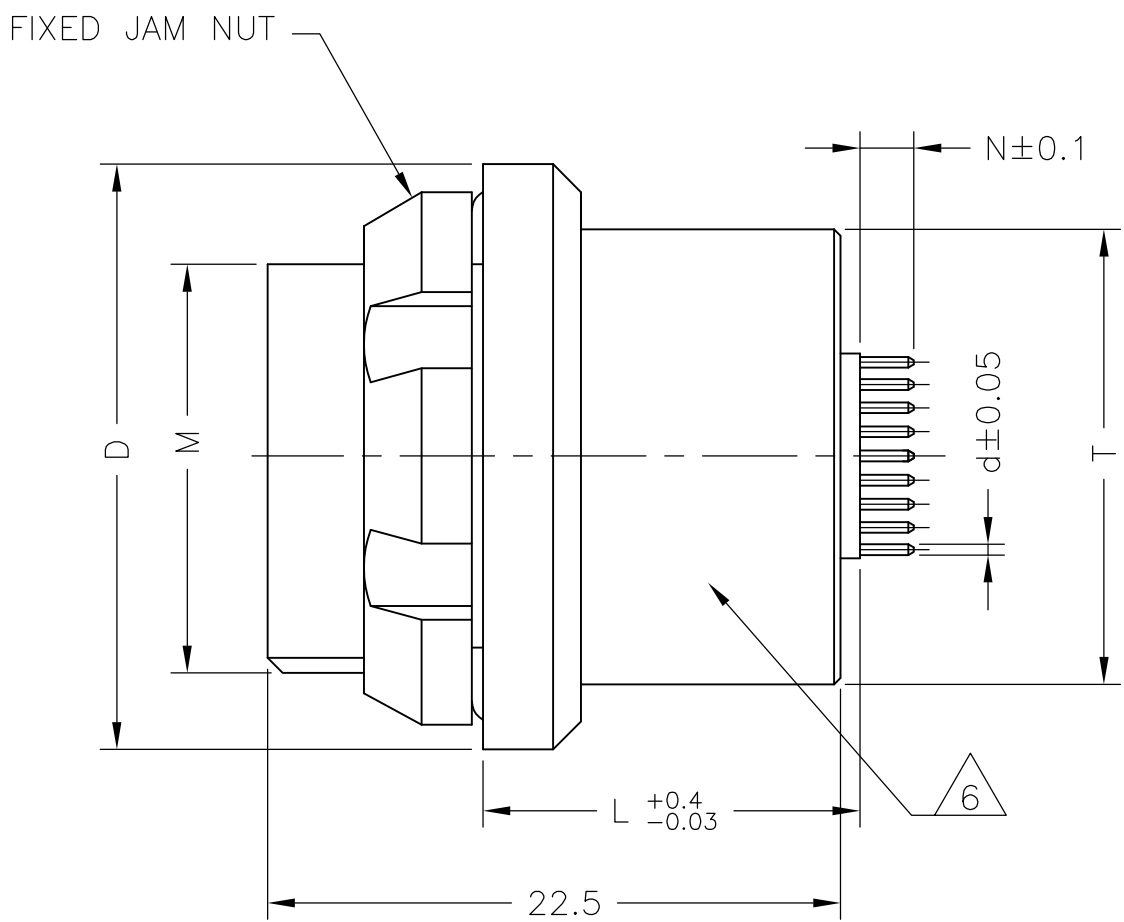


D

C


C

B


A

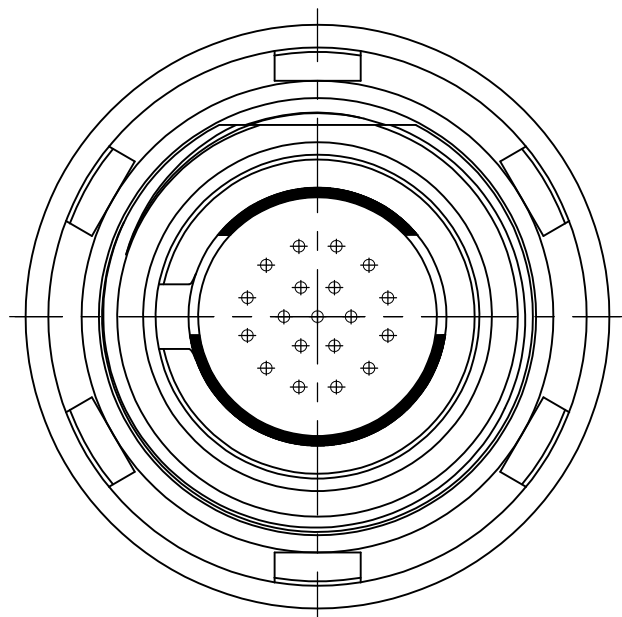


DOUBLE POLARIZATION

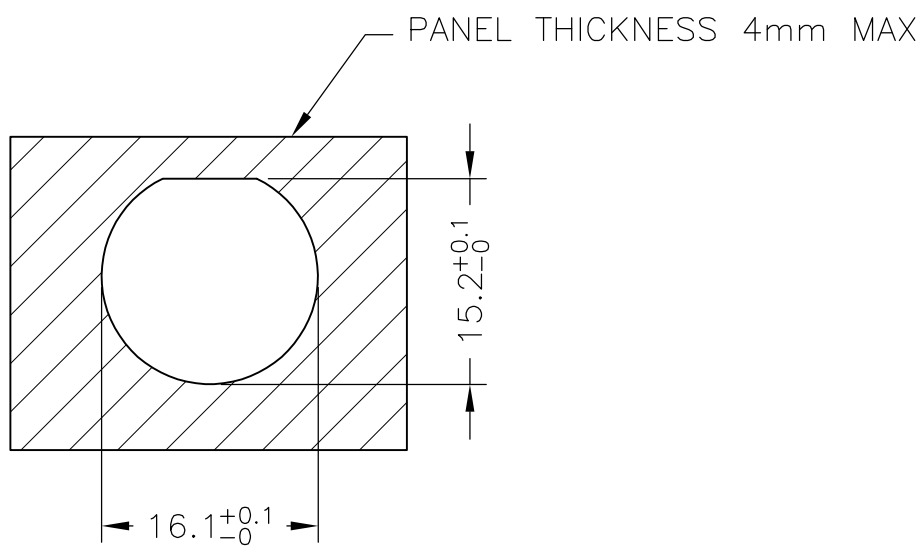

PANEL CUTOUT

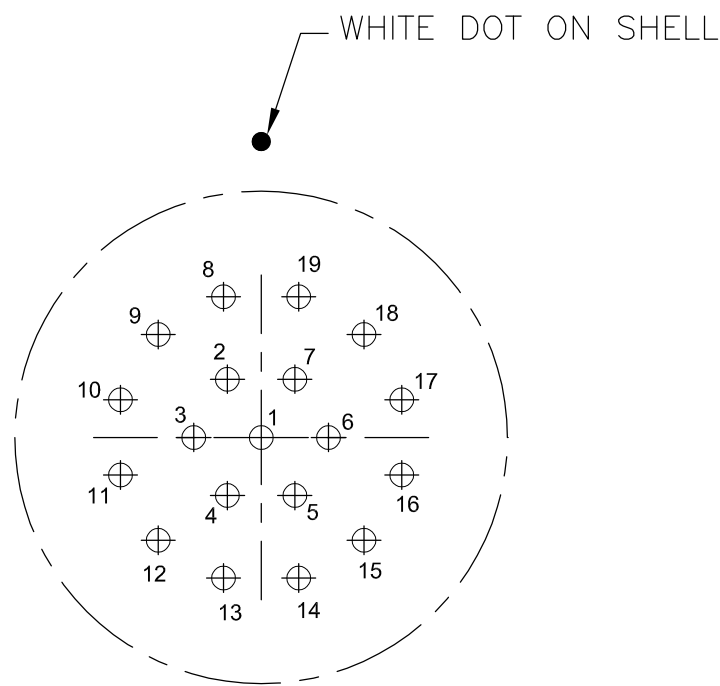

CAVITY IDENTIFICATION WHEN VIEWED FROM MATING FACE CONNECTOR

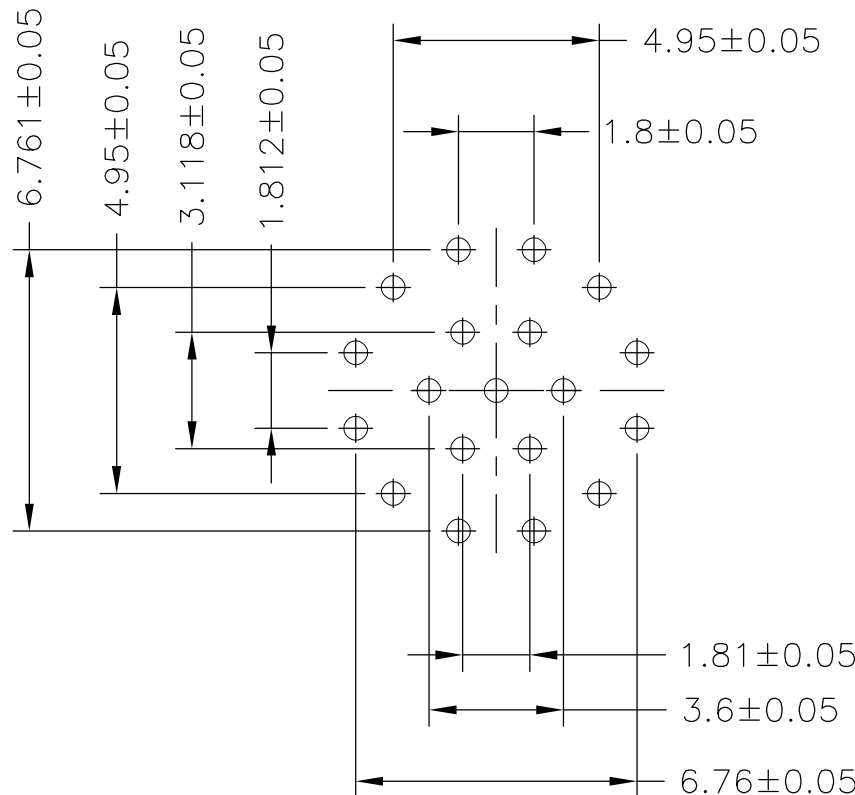

CONTACT HOLE PATTERNS FOR PCB MOUNT

- DWV RATING: 725VAC @ SEA LEVEL
- WORKING TEMPERATURE: -55°C ~ +125°C

3 MATERIAL:

CONTACT : COPPER ALLOY
SHELL : COPPER ALLOY
INSULATOR : PEEK
O RING : SILICON RUBBER




4 FINISH

CONTACT: GOLD OVER NICKEL
SHELL : BLACK CHROMIUM

- WATER PROOF: 1M IMMERSION

6 PART IS MARKED WITH THE TE PART NUMBER, CHINA, DATE CODE, AND LOT ID

7 ALL TOLERANCES TO BE ±0.20MM UNLESS NOTED.

CHROMIUM-BLACK	DOUBLE	SOLDERING	2.54	ø0.5	15	ø15	M16X1	ø22	4	2157342-2
CHROMIUM-BLACK	SINGLE	SOLDERING	2.54	ø0.5	15	ø15	M16X1	ø22	4	2157342-1
FINISH	POLARIZATION	TERMINATION	N	d	L	T	THREAD	D	SHELL SZ	TE CONNECTIVITY PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm  MATERIAL  TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± -  1 PLC ± - 2 PLC ± 0.20 3 PLC ± - 4 PLC ± - ANGLES ± 3° FINISH  DWN C.C. THOMAS 20AUG2009 CHK R. GROSS 20AUG2009 APVD R. GROSS 20AUG2009 PRODUCT SPEC 108-127005 APPLICATION SPEC — WEIGHT — CUSTOMER DRAWING TE Connectivity NAME CIRCULAR HD RECEPTACLE WITH SOCKET, CONTACTS, JAM NUT, FRONT MOUNTING, STRAIGHT PCB 19 POS. SIZE A2 CAGE CODE 00779 DRAWING NO C-2157342 RESTRICTED TO — SCALE NTS SHEET 1 OF 1 REV C										