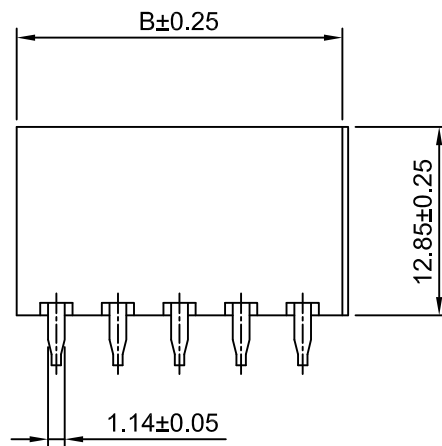
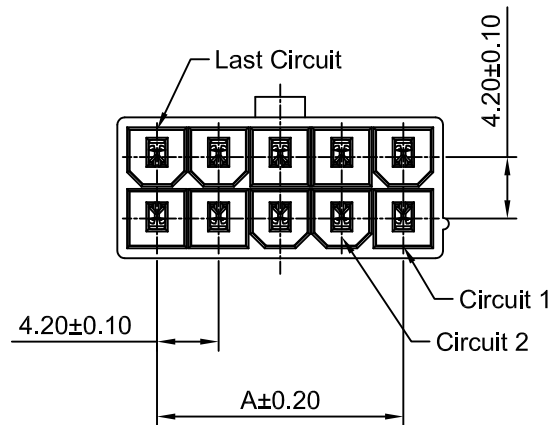


Ordering Information:
C4201WVD-2xXP - *** - *** - ***
1 2 3 4

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-2(Natural)

V0: Nylon 66 UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): see section 2 material

BK: Black RD: Red

BL: Blue YL: Yellow



GN: Green

4.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

G30: Gold over Nickel(Au:30u",Mating Area)

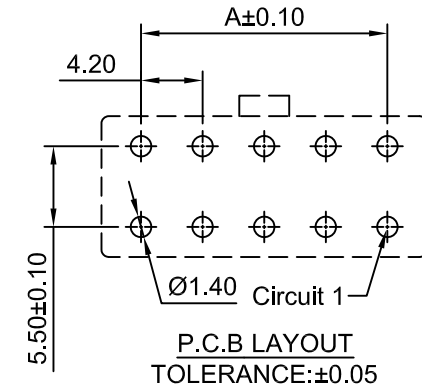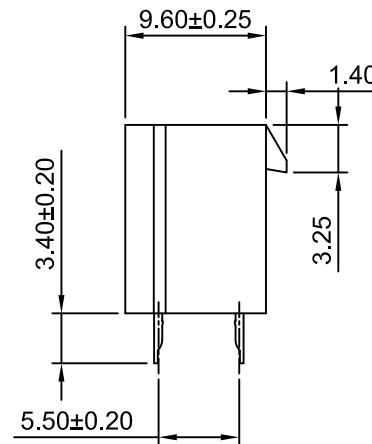

SPECIFICATIONS:

Current Rating: 13A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Part No.	Dimensions(mm)	
	A	B
C4201WVD-2x1P	---	5.60
C4201WVD-2x2P	4.20	9.80
C4201WVD-2x3P	8.40	14.00
C4201WVD-2x4P	12.60	18.20
C4201WVD-2x5P	16.80	22.40
C4201WVD-2x6P	21.00	26.60
C4201WVD-2x7P	25.20	30.80
C4201WVD-2x8P	29.40	35.00
C4201WVD-2x9P	33.60	39.20
C4201WVD-2x10P	37.80	43.40
C4201WVD-2x11P	42.00	47.60
C4201WVD-2x12P	46.20	51.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1
DRN	CHK	APVD
Chengbiao Ye	DianKui Wan	Jack Yin

General Tolerance	THIRD ANGLE PROJECTION
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°	

TITLE	
4.20mm PITCH 180° DUAL ROW WAFER -WITHOUT DRAIN HOLES	
DRAWING NO	REV
C4201WVD-2xXP	A2

A2	CHANGE THE DRAWING	2023.02.17
A1	CHANGE THE DRAWING	2020.06.03
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE