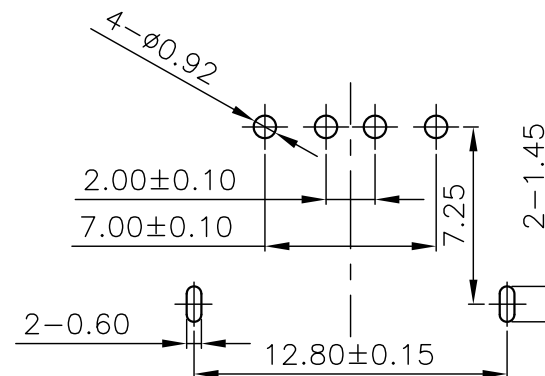
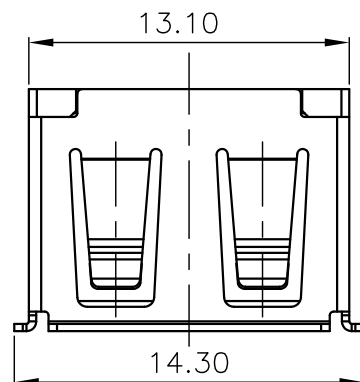
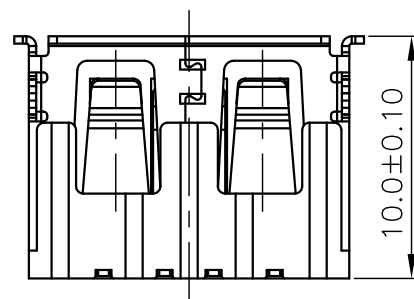
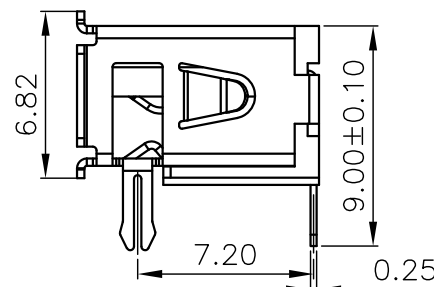
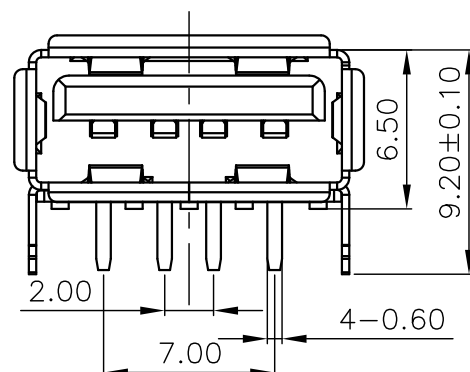


SYM	ECN No.	MODIFICATION	DATE	ISSUED

FRONT EDGE OF CONNECTOR
PCB LAYOUT

Note:

1.Material:

- 1.1,Housing: High temperature thermoplastic with/black G/F,UL94v-0
- 1.2,Contact: copper alloy,t=0.25mm
- 1.3,Shell: copper/Ferroalloy alloy,t=0.30mm

2.Specification:

- 2.1,Current rating:1.5A Max.
- 2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3,Contact resistance: 30 mΩ Max.
- 2.4,Insulation resistance: 100 MΩ Min.
- 2.5,Total mating force: 3.57 Kg Max.
- 2.6,Total unmating force: 1.0 Kg Min.

3.Finish:

- 3.1,Contact: Plated Gold in Mating Area:
Tin On Solder Tails
Shell: Nickel Plating

4.Environmental:

- 4.1,Temperature range: -55°C~85°C

PART ON:

910-15XAXXX7D1XX

- 电镀规格: 02, 镀金1u" 03, 镀金3u" 07, 镀金15u" 08, 镀金30u"
- 端子材质: 1, 青铜 2, 磷铜
- 端子规格: D, 90度 Y, 180度 S, SMT贴板
- 塑胶型态: 1, 6.2有耳 2, 6.5有耳 3, 6.8有耳 4, 5.7有耳 6, 6.2无耳 7, 6.5无耳 8, 6.8无耳
- 塑胶颜色: 01, 白色 02, 黑色 03, 本色
- 塑胶材质: 1, PBT 2, LCP 3, PA9T 4, PPA 5, PA6T
- 对插方向: A, 正向 B, 反向
- 外壳材质: 1, 铁壳 2, 铜壳
- 插口类型: 5, 有边 6, 无边
- 外壳脚型: 1, 前两脚 2, 后两脚 3, 四脚 4, 无脚
- 类别: E款

1	910-151A1027D10200	5	
2		6	
3		7	
4		8	

DRAWN

JH 深圳市精拓金电子有限公司

CHECKED

TITLE

PART NO.


910-151A1027D10200

APPROVED

AF10.0C款前两脚有边铁壳
PBT黑胶6.5DIP无耳朵

DRAWING NO.

R910151A1017D102

UNIT
mm

TOLERANCE

.XXX±.10, .XX±.20, .X±.25, ANG±5°

SCALE

1:1

SHEET

1 OF 1

SIZE

A4

REV.

X1